



EDCON-COMPONENTS



Drawing

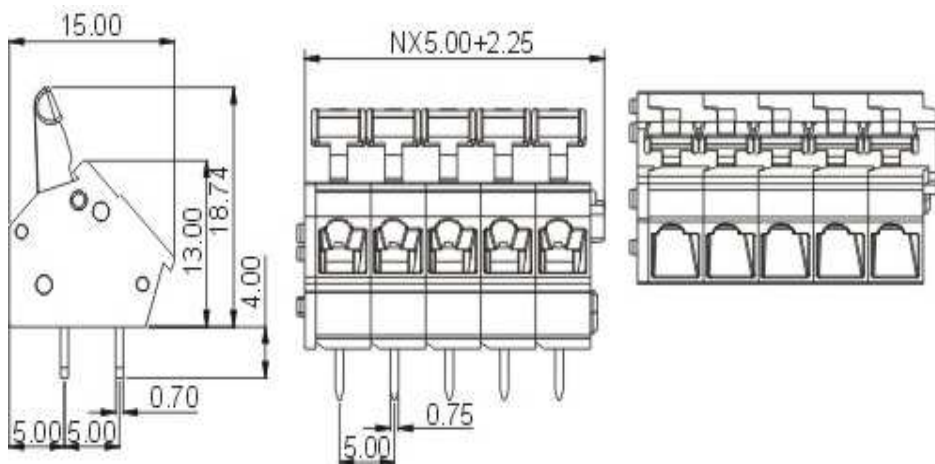

P.C.B. Layout

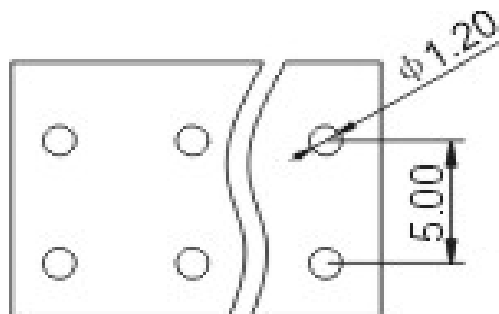

Specifications

APPROVAL



Electrical

Standard
Rated voltage
Rated current
Wire range
Withstanding voltage

UL	IEC
300V	250V, 450V
15A	16A
28-12 AWG	2.5mm ²
AC2000V/1Min	

Mechanical

Wire strip length
Operating temperature

5 ~ 6mm
-40°C ~ +105°C

Dimensions

Pitch
Poles

5.00mm
1P - xxP

Material

Housing
Pin header
Wire guard

PA66 (UL94V-0)
Phosphor Bronze, Tin plated
Stainless steel



Certification




Screwless Terminal Block /
Pitch 5.00mm

Part No.: **A11L002**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.07.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3		

www.edcon-components.com

email: info@edcon-components.com

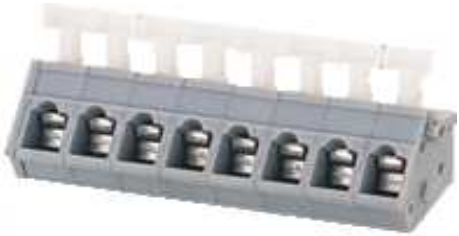

Ordering Informations

Serie	-	No. of Pole	XX	Body-Color	XX	-	Customer Request	X
A11L002	-	XX	XX	-	X			

XX = total	WH - white
	GN - green
	GR - gray
	PG - Phoenix Green
	OR - orange
	BK - black
	BL - blue
	LG - light gray



Certification



Screwless Terminal Block /
Pitch 5.00mm


Part No.: **A11L002**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.07.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3		



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

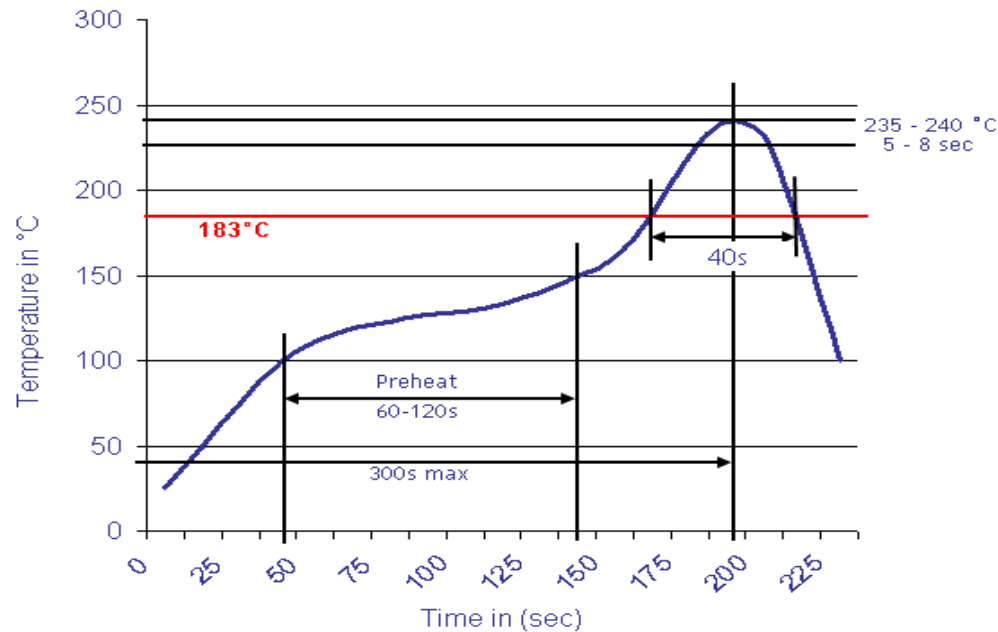

Screwless Terminal Block /

Pitch 5.00mm

Part No.: **A11L002**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.07.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	

Customer:

email: info@edcon-components.com