

Data Sheet

Screwless Terminal Block

Pitch: 5,00 mm

Serie: A11L026

Customer Information for special Item

EDCON Customer : 0

Customer Version No. : 0

EDCON-COMPONENTS



Technical Description

Drawing (Dimension in mm)

Electrical

Standard
 Rated voltage
 Rated current
 Solid / Stranded wire
 Withstanding voltage
 Wire range

cULus	VDE
300V	250V
10A	10A
20-16 AWG	20-16 AWG
1.6KV	2.0KV
0.5 ~ 1.0mm ²	

Mechanical

Wire strip length
 Ambient temperature
 Soldering temperature

6 ~ 7mm
 -40°C ~ +115°C
 250°C ±10°C/5 sec

Dimensions


Pitch
 Poles

5.00mm
 2P - 24P

Material

Housing
 Pin header
 Wire guard

Thermoplastic (UL94V-0)
 Brass, Tin plated
 Stainless steel

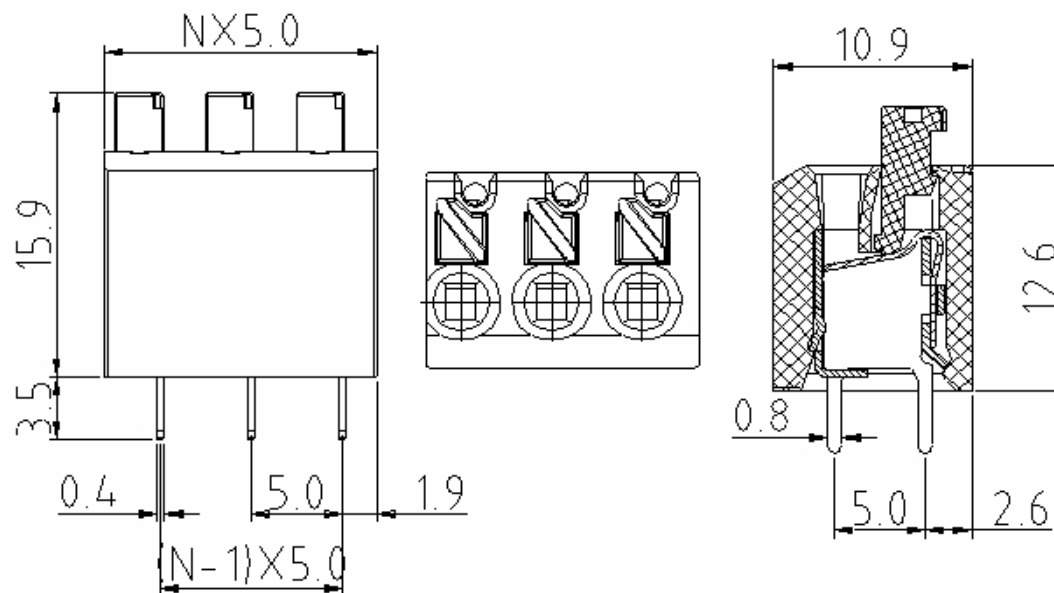

Screwless Terminal Block

Part No.: **A11L026**

Customer:


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	31.01.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 4

EDCON-COMPONENTS



PCB Layout (Dimension in mm)

Dimensions (mm)

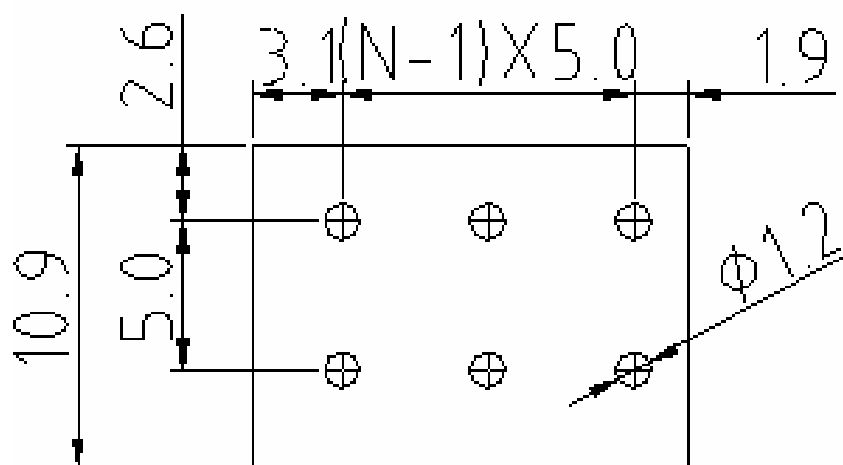

No. of Pos.	A	Tol. P	B	Tol. P
02	9,00	± 0,35	5,00	± 0,35
03	14,00	± 0,35	10,00	± 0,35
04	19,00	± 0,35	15,00	± 0,35
05	24,00	± 0,35	20,00	± 0,35
06	29,00	± 0,35	25,00	± 0,35
07	34,00	± 0,35	30,00	± 0,35
08	39,00	± 0,35	35,00	± 0,35
09	44,00	± 0,35	40,00	± 0,35
10	49,00	± 0,35	45,00	± 0,35
11	54,00	± 0,35	50,00	± 0,35
12	59,00	± 0,35	55,00	± 0,35
13	64,00	± 0,35	60,00	± 0,35
14	69,00	± 0,35	65,00	± 0,35
15	74,00	± 0,35	70,00	± 0,35
16	79,00	± 0,35	75,00	± 0,35
17	84,00	± 0,35	80,00	± 0,35
18	89,00	± 0,35	85,00	± 0,35
19	94,00	± 0,35	90,00	± 0,35
20	99,00	± 0,35	95,00	± 0,35
21	104,00	± 0,35	100,00	± 0,35
22	109,00	± 0,35	105,00	± 0,35
23	114,00	± 0,35	110,00	± 0,35
24	119,00	± 0,35	115,00	± 0,35

Screwless Terminal Block

Part No.: **A11L026**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	31.01.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 4	Customer:

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pos.	Body Color	Approval	Approval Code	ROHS	Packing	EDCON Cust. No.	Customer Version		
-------	-------------	------------	----------	---------------	------	---------	-----------------	------------------	--	--

A11L026	02	GY	N	N	R	B				
----------------	-----------	-----------	----------	----------	----------	----------	--	--	--	--

Pitch 5,00	02 = Number of Pos. Standard 2~24 Pos.	GY = Gray (Standard) GN = Green OR = Orange BK = Black	N = No Approval 1 = Approval for Material 2 = Approval for Terminal Block	N = NON Approval A = UL /UR Approval Please consult EDCON for available B = VDE Approval Please consult EDCON for available C = TÜV Approval Please consult EDCON for available	R = ROHS Conform N = NON ROHS Conform	B = Standard Package I = Individual Package	xxxxxx = Customer Number	xxx = Customer Version ??(Printing)		
---------------	--	---	--	--	--	--	---------------------------------	--	--	--

Screwless Terminal Block

Part No.: **A11L026**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	31.01.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



Screwless Terminal Block

Part No.: **A11L026**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	31.01.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	

