

Data Sheet

Dual Screwless Pluggable Terminal Block (Plug)

Pitch: 3,50 mm


Serie: A14G190

Customer Information for special Item

EDCON Customer : xxxxxx

Customer Version No. : xx

EDCON-COMPONENTS



Technical Discription

Electrical:

	UL/UR	IEC	VDE
Rated voltage:	300V	250V	
Rated current:	8A	7A	
Withstanding Voltage: AC/1min:	2000V	2000V	
Operating Temperature:	-40°C ~ +105°C		



Mechanical:

	8 ~ 9	8 ~ 9	
Strip length: mm	8 ~ 9	8 ~ 9	
Wire range: Solid wire: AWG	28-16	1,5mm ²	
Wire range: Stranded wire:AWG	28-16	1,5mm ²	

Material:

Housing Terminal Body: PA66 UL94V-0
 Material Screw:
 Material Terminal:

Drawing (Dimension in mm)

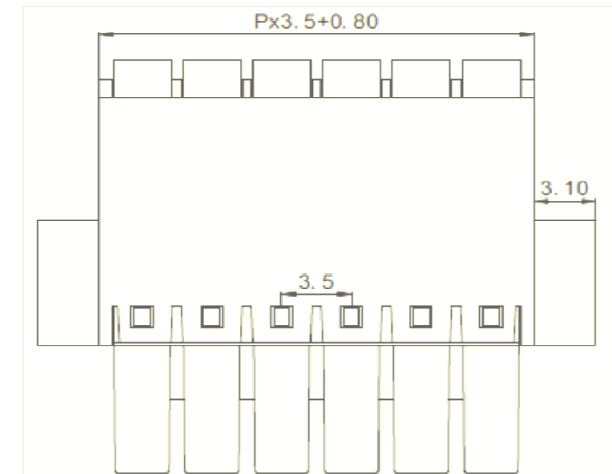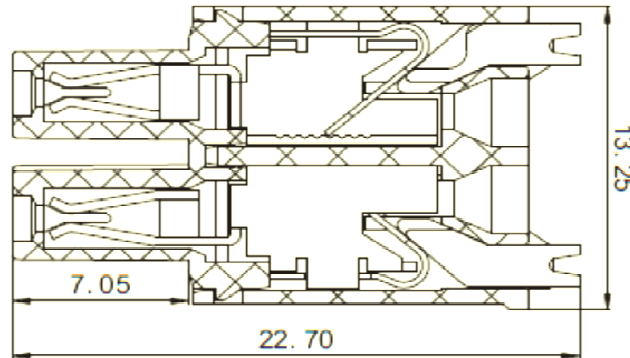

Tolerances unless otherwise specified (mm)

x	x.X	x.XX	x.XXX	Angle
±	±	±	±	±3°


Dual Screwless Pluggable Terminal Block (Plug)

Part No.: **A14G190**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.09.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

Customer:

EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pos.	Body Color	Screw Function	Approval Code	ROHS	Packing	EDCON Cust. No.	Customer Version		
A14G190	02	PG	C	N	R	B	xxxxxx	xx		

Pitch
3,50

02= Number of Pos. Standard 2 ~ 24Pos.	PG= Phoenix Green (Standard) GY= Gray LG= Light Gray OR= Orange	C= Screwless Type	N= NON Approval 1= UL-Approval for Material A= UL /UR Approval Please consult EDCON for available B= VDE Approval Please consult EDCON for available C= TÜV Approval Please consult EDCON for available	R= ROHS Conform N= NON ROHS Conform	B= Bulk-Ware I= Individual Package	xxxxxx= Customer Number	xx= Customer Version ??(Printing)
--	--	--------------------------	--	--	---	--------------------------------	--

Dual Screwless Pluggable Terminal Block (Plug)	
Part No.:	A14G190
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.09.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2