

Data Sheet

(Plug) of Pluggable Terminal Block

Pitch: 3,50 mm

Serie: A14G198

Customer Information for special Item

EDCON Customer : 0

Customer Version No. : 0


EDCON-COMPONENTS



Technical Discription

Group UL / CUL	B	C	D
Rated Voltage: (V)	300		300
Rated Current: (A)	8		10
Wire Range:			
Solid: (AWG)	28~16		
Stranged: (AWG)	28~16		
Withstanding Voltage:	2000V/1Min		
Technical Data IEC (VDE)	III	III	II
Contamination Class	-	-	2
Rated Voltage: (V)	-	-	250
Rated Current: (A)	-	-	7
Withstandin Voltage impulse: (KV)	-	-	2,0
Conductor Cross Section			
Solid: (mm ²)	1,5		
Flexible: (mm ²)	1,5		
Material:			
Insulation Material:	PA66		
Imflamability:	UL94V-0		
Contact Material:	Copper Alloy		
surface Plating:	Tin plated		
Other Data			
Pitch: (mm)	3,5		
No of Poles: (P)	2x2 ~2x24		
Stripping Length: (mm)	8~9		
Screw: (Nm)			
Operating Temperature: (°C)	-40C to +105		
Pin Dimensions (mm)			
PCB Hole Diameter:(mm)			

Drawing (Dimension in mm)

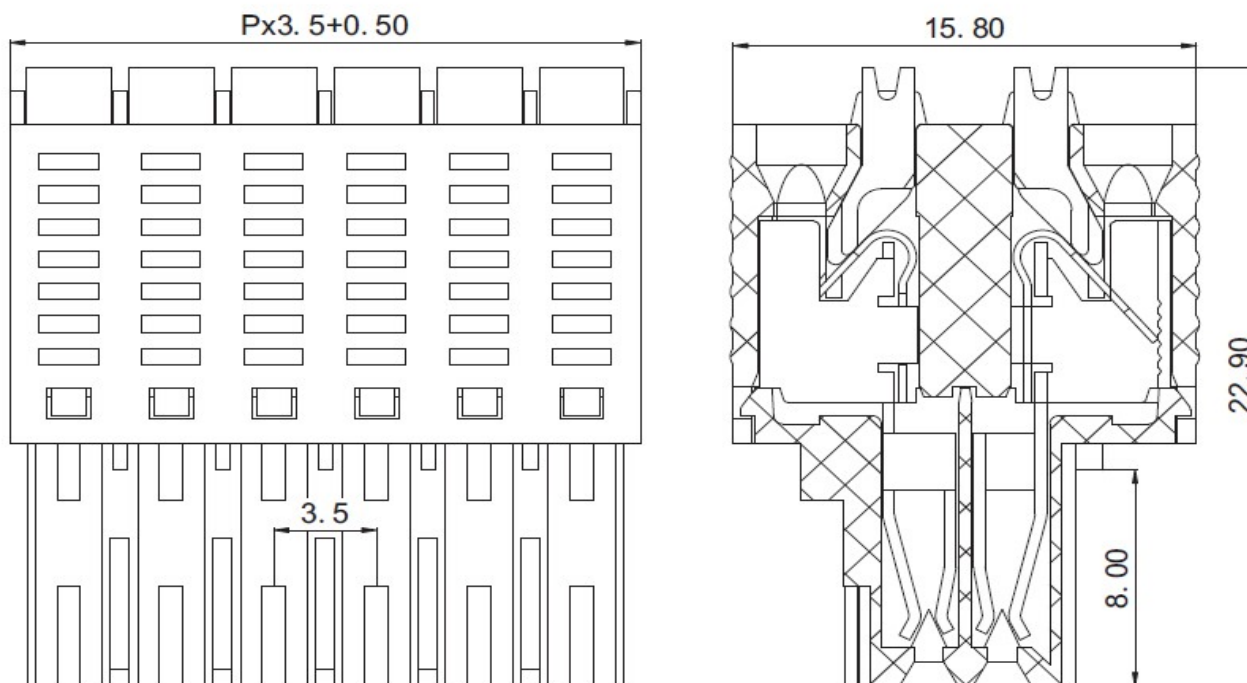

(Plug) of Pluggable Terminal Block

Part No.: **A14G198**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	04.12.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



PCB Layout

Dimensions (mm)

linear dimension(Tolerances Standard GB/T 14486-2008)								—	▱	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60


(Plug) of Pluggable Terminal Block	
Part No.:	A14G198
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	04.12.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pos.	Body Color	No Function	Approval Code	ROHS	Packing	EDCON Cust. No.	Customer Version		
-------	-------------	------------	-------------	---------------	------	---------	-----------------	------------------	--	--

A14G198	04	PG	N	A	R	B				
----------------	-----------	-----------	----------	----------	----------	----------	--	--	--	--

Pitch
3,50

04 = Number of Pos. Standard 2x2 ~ 2x24 Pos.	PG = Phoenix Green (Standard)	N = No function	N = NON Approval A = UL /UR Approval Please consult EDCON for available B = VDE Approval Please consult EDCON for available C = TÜV Approval Please consult EDCON for available	R = ROHS Conform N = NON ROHS Conform	B = Bulk-Ware I = Individual Package	xxxxxx = Customer Number	xxx = Customer Version ??(Printing)
--	--------------------------------------	------------------------	---	--	---	---------------------------------	---

(Plug) of Pluggable Terminal Block
Part No.: A14G198
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	04.12.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	