

EDCON-COMPONENTS



Drawing

Specification

P.C.B. Layout

	A[mm]		A[mm]
02P	5.5	26P	47.5
04P	9.0	28P	51.0
06P	12.5	30P	54.5
08P	16.0	32P	58.0
10P	19.5	34P	61.5
12P	23.0	36P	65.0
14P	26.5	38P	68.5
16P	30.0	40P	72.0
18P	33.5		
20P	37.5		
22P	40.5		
24P	44.0		

APPROVAL



Electrical

Standard	UL
Rated voltage	AC 150V
Rated current	5A
Wire range	22-18 AWG

Mechanical

Ambient temperature	-40°C ~ +150°C
---------------------	----------------

Dimensions

Pitch	3.50mm
Poles	2P - 40P

Material

Housing	PBT (UL94V-0)
Pin header	Phosphor Bronze, Tin plated
Spring	Stainless strip steel



Certification



Pluggable Terminal Block /
Pitch 3.50mm

Part No.: A14G008

Customer:

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	1 from 3

EDCON-COMPONENTS



Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A14G008	-	XX	XX	-	X
		XX = total	WH - white		
		02	GN - green		
		...	GR - gray		
		40	TP - transparent		
			OR - orange		
			BK - black		
			BL - blue		
			RD - red		
			YW - yellow		
			PG - Phoenix Green		




Pluggable Terminal Block / Pitch 3.50mm	
Part No.:	A14G008
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike		Sheet No.		2 from 3


www.edcon-components.com

email: info@edcon-components.com

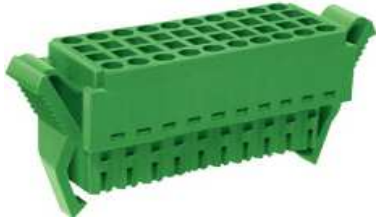

Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

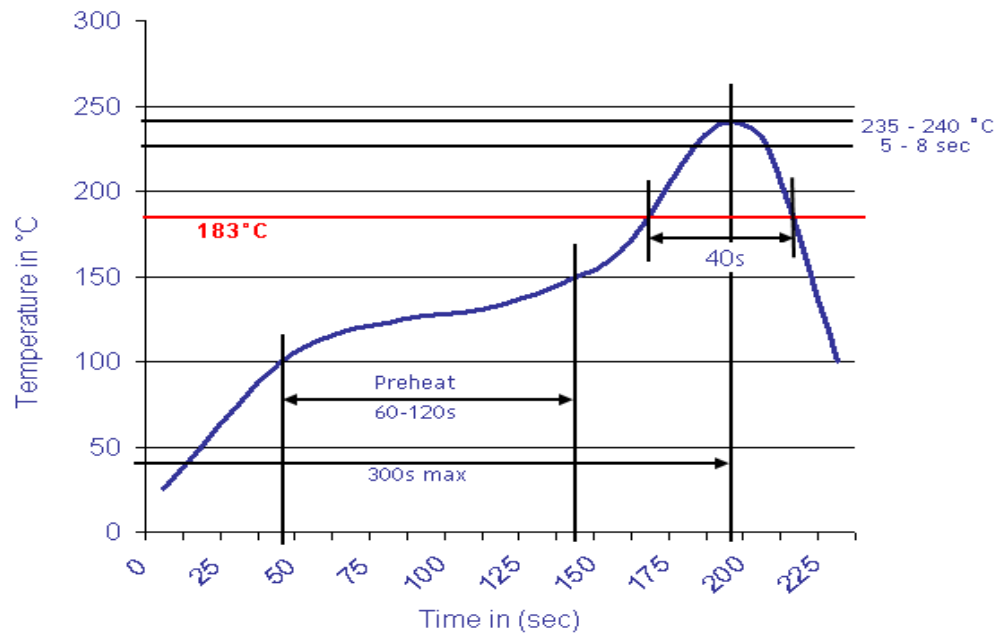

Pluggable Terminal Block / Pitch 3.50mm	
Part No.:	A14G008
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	3 from 3