

EDCON-COMPONENTS



Drawing

Specification

P.C.B. Layout

	A[mm]		A[mm]
02P	7.0	14P	49.0
03P	10.5	15P	52.5
04P	14.0	16P	56.0
05P	17.5	17P	59.5
06P	21.0	18P	63.0
07P	24.5	19P	66.5
08P	28.0	20P	70.0
09P	31.5	21P	73.5
10P	35.0	22P	77.0
11P	38.5	23P	80.5
12P	42.0	24P	84.0
13P	45.5		

APPROVAL

Electrical

Standard
Rated voltage
Rated current
Wire range

Mechanical

Ambient temperature
Screw, Torque

Dimensions

Pitch
Poles

Material

Housing
Pin header
Screw
Cage clamp



cUL
AC 300V
8A
24-16 AWG

-40°C ~ +105°C
M2.6, 0.34Nm (3.0Lb-In.)

3.50mm
2P - 24P

PA66 (UL94V-0)
Phosphor Bronze, Tin plated
steel, Ni-plated
Brass, Ni-plated



Certification



Pluggable Terminal Block /
Pitch 3.50mm

Part No.: A14G011

Customer:

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	1 from 3

EDCON-COMPONENTS



Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A14G011	-	XX	XX	-	X
		XX = total	WH - white		
		02	GN - green		
		...	GR - gray		
		24	TP - transparent		
			OR - orange		
			BK - black		
			BL - blue		
			RD - red		
			YW - yellow		
			PG - Phoenix Green		



Certification



Pluggable Terminal Block / Pitch 3.50mm	
Part No.:	A14G011
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike		Sheet No.		2 from 3


www.edcon-components.com

email: info@edcon-components.com



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

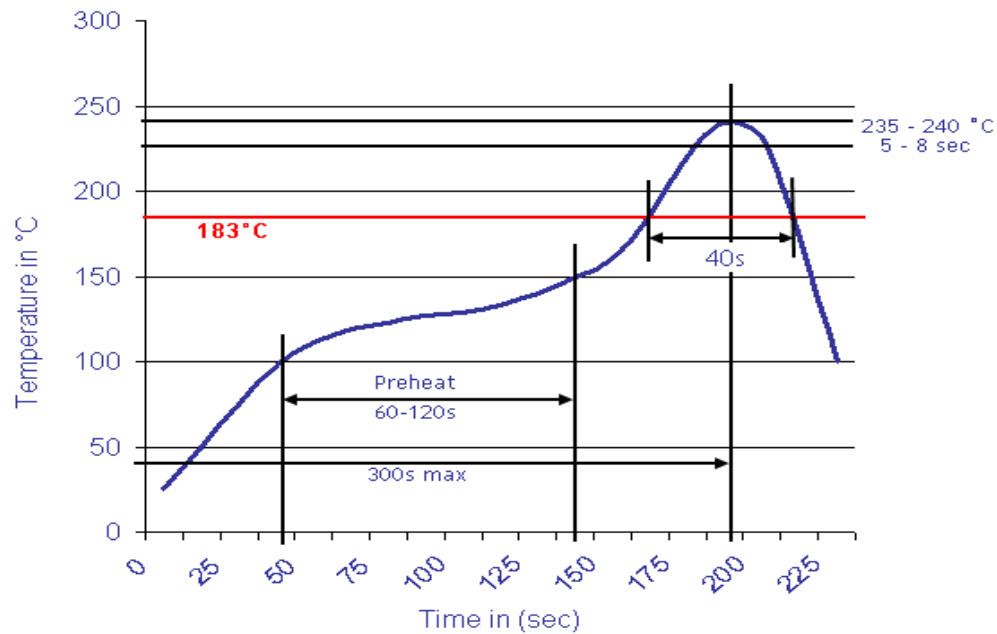

Pluggable Terminal Block / Pitch 3.50mm	
Part No.:	A14G011
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	3 from 3