

EDCON-COMPONENTS



Drawing

Specification

APPROVAL



Electrical

Standard
Rated voltage
Rated current

cUL
AC 125V
8A

Mechanical

Ambient temperature

-40°C ~ +105°C

Dimensions

Pitch
Poles

3.50mm
2P - 24P

Material

Housing
Solder pin

PBT (UL94V-0)
Brass, Tin plated

P.C.B. Layout

	A[mm]		A[mm]
02P	7.0	14P	49.0
03P	10.5	15P	52.5
04P	14.0	16P	56.0
05P	17.5	17P	59.5
06P	21.0	18P	63.0
07P	24.5	19P	66.5
08P	28.0	20P	70.0
09P	31.5	21P	73.5
10P	35.0	22P	77.0
11P	38.5	23P	80.5
12P	42.0	24P	84.0
13P	45.5		



Certification



Pluggable Terminal Block /
Pitch 3.50mm

Part No.: A14G012

Customer:

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A14G012	-	XX	XX	-	X
		XX = total	WH - white		
		02	GN - green		
		...	GR - gray		
		24	TP - transparent		
			OR - orange		
			BK - black		
			BL - blue		
			RD - red		
			YW - yellow		
			PG - Phoenix Green		



Pluggable Terminal Block / Pitch 3.50mm	
Part No.:	A14G012
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike		Sheet No.		2 from 3


www.edcon-components.com

email: info@edcon-components.com



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

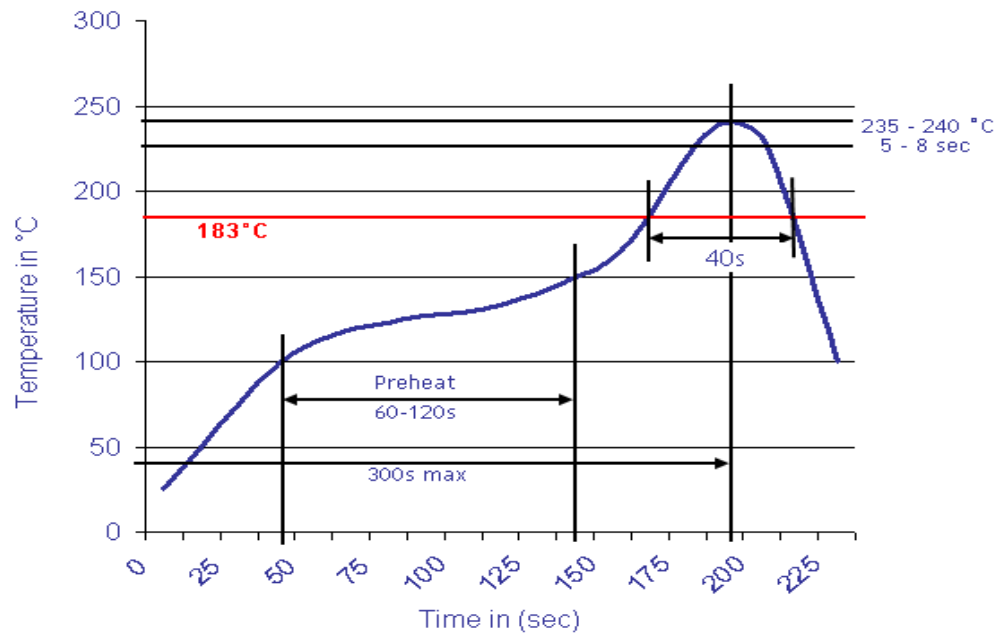

Pluggable Terminal Block / Pitch 3.50mm	
Part No.:	A14G012
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	3 from 3