


EDCON-COMPONENTS



Drawing

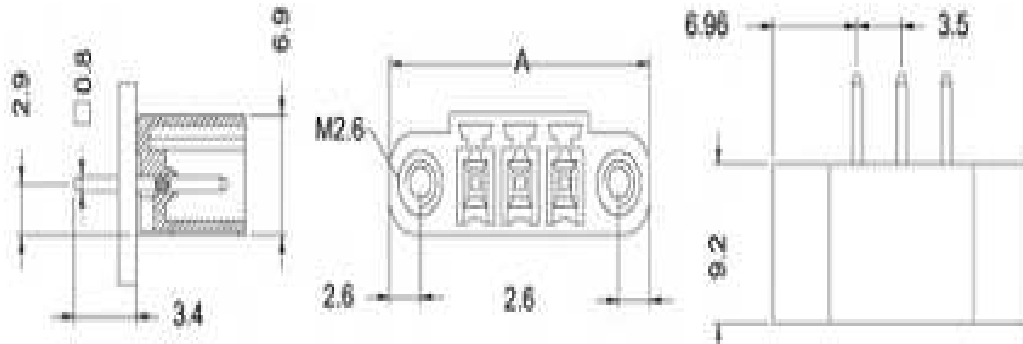

Specification

APPROVAL



Electrical

Standard
Rated voltage
Rated current

cUL	VDE
AC 150V	AC 300V
12A	10A

Mechanical

Ambient temperature

-40°C ~ +105°C

Dimensions

Pitch
Poles


3.50mm
2P - 24P

Material

Housing
Solder pin

PA66 (UL94V-0)
Brass, Tin plated

P.C.B. Layout

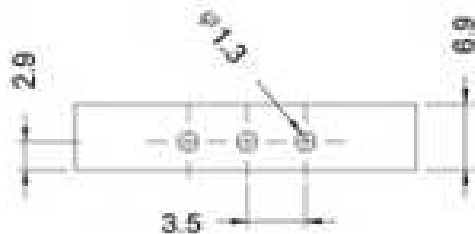

	A[mm]		A[mm]
02P	17.4	14P	59.4
03P	20.9	15P	62.9
04P	24.4	16P	66.4
05P	27.9	17P	69.9
06P	31.4	18P	73.4
07P	34.9	19P	76.9
08P	38.4	20P	80.4
09P	41.9	21P	83.9
10P	45.4	22P	87.4
11P	48.9	23P	90.9
12P	52.4	24P	94.4
13P	55.9		



Certification



Pluggable Terminal Block /
Pitch 3.50mm

Part No.: A14G017

Customer:

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A14G017	-	XX	XX	-	X
		XX = total	WH - white		
		02	GN - green		
		...	GR - gray		
		24	TP - transparent		
			OR - orange		
			BK - black		
			BL - blue		
			RD - red		
			YW - yellow		
			PG - Phoenix Green		



Certification



Pluggable Terminal Block / Pitch 3.50mm	
Part No.:	A14G017
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike		Sheet No.		2 from 3


www.edcon-components.com

email: info@edcon-components.com



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

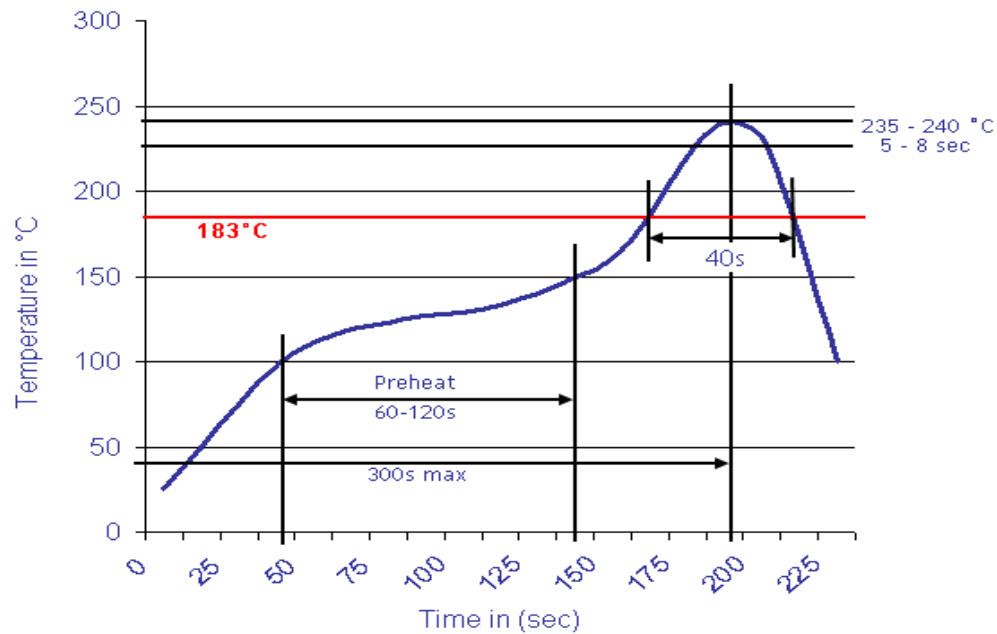

Pluggable Terminal Block /
Pitch 3.50mm

Part No.: A14G017

Customer:

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	3 from 3