

EDCON-COMPONENTS



Drawing

Specification

Electrical

Rated voltage AC 160V
Rated current 8A

Mechanical

Ambient temperature -40°C ~ +105°C

Dimensions

Pitch 3.50mm
Poles 2P - 24P

Material

Housing PA66 (UL94V-0)
Solder pin Brass, Tin plated

P.C.B. Layout

	A[mm]		A[mm]
02P	11.3	14P	71.3
03P	16.3	15P	76.3
04P	21.3	16P	81.3
05P	26.3	17P	86.3
06P	31.3	18P	91.3
07P	36.3	19P	96.3
08P	41.3	20P	101.3
09P	46.3	21P	106.3
10P	51.3	22P	111.3
11P	56.3	23P	116.3
12P	61.3	24P	121.3
13P	66.3		



Pluggable Terminal Block /
Pitch 3.50mm

Part No.: A14G018

Customer:

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	1 from 3

EDCON-COMPONENTS



Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A14G018	-	XX	XX	-	X
		XX = total	WH - white		
		02	GN - green		
		...	GR - gray		
		24	TP - transparent		
			OR - orange		
			BK - black		
			BL - blue		
			RD - red		
			YW - yellow		
			PG - Phoenix Green		



Pluggable Terminal Block / Pitch 3.50mm	
Part No.:	A14G018
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike		Sheet No.		2 from 3


www.edcon-components.com

email: info@edcon-components.com



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

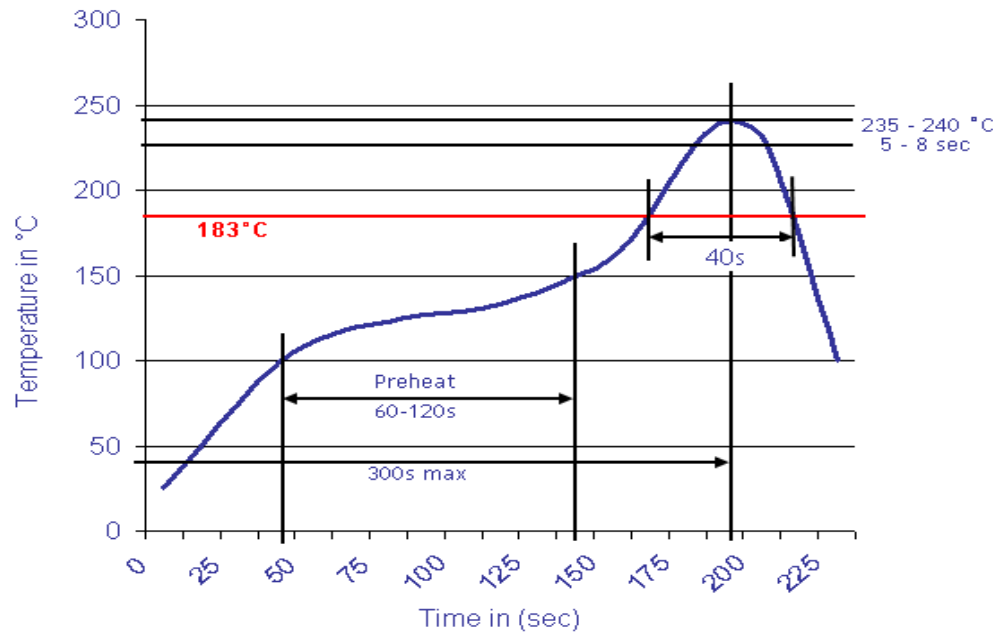

Pluggable Terminal Block / Pitch 3.50mm	
Part No.:	A14G018
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	3 from 3