


EDCON-COMPONENTS

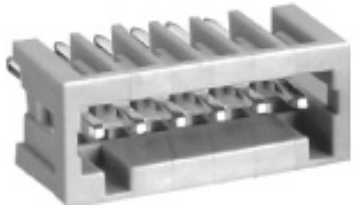

Drawing

Specification

APPROVAL



Electrical

Standard
Rated voltage
Rated current

cUL
AC 300V
10A

Mechanical

Ambient temperature

-40°C ~ +105°C

Dimensions

Pitch
Poles

3.50mm
2P - 24P

Material

Housing
Solder pin

PA66 (UL94V-0)
Brass, Tin plated

P.C.B. Layout

	A[mm]		A[mm]
02P	9.45	14P	51.45
03P	12.95	15P	54.95
04P	16.45	16P	58.45
05P	19.95	17P	61.95
06P	23.45	18P	65.45
07P	26.95	19P	68.95
08P	30.45	20P	72.45
09P	33.95	21P	75.95
10P	37.45	22P	79.45
11P	40.95	23P	82.95
12P	44.45	24P	86.45
13P	47.95		



Certification



Pluggable Terminal Block /
Pitch 3.50mm

Part No.: A14G020


Customer:

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS

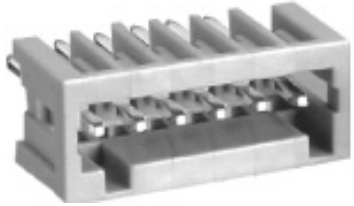

Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A14G020	-	XX	XX	-	X
		XX = total	WH - white		
		02	GN - green		
		...	GR - gray		
		24	TP - transparent		
			OR - orange		
			BK - black		
			BL - blue		
			RD - red		
			YW - yellow		
			PG - Phoenix Green		



Certification




Pluggable Terminal Block / Pitch 3.50mm	
Part No.:	A14G020
Customer:	

DRW:	Justin	CHKD:	Frank	MATL:	Jordan	TOLERANCE:	Lord	Date:	10.02.2009
APPD:	Pete	FINISH:	Mike				Sheet No.:		2 from 3


www.edcon-components.com

email: info@edcon-components.com

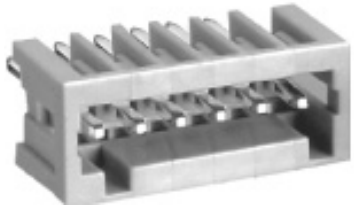

Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

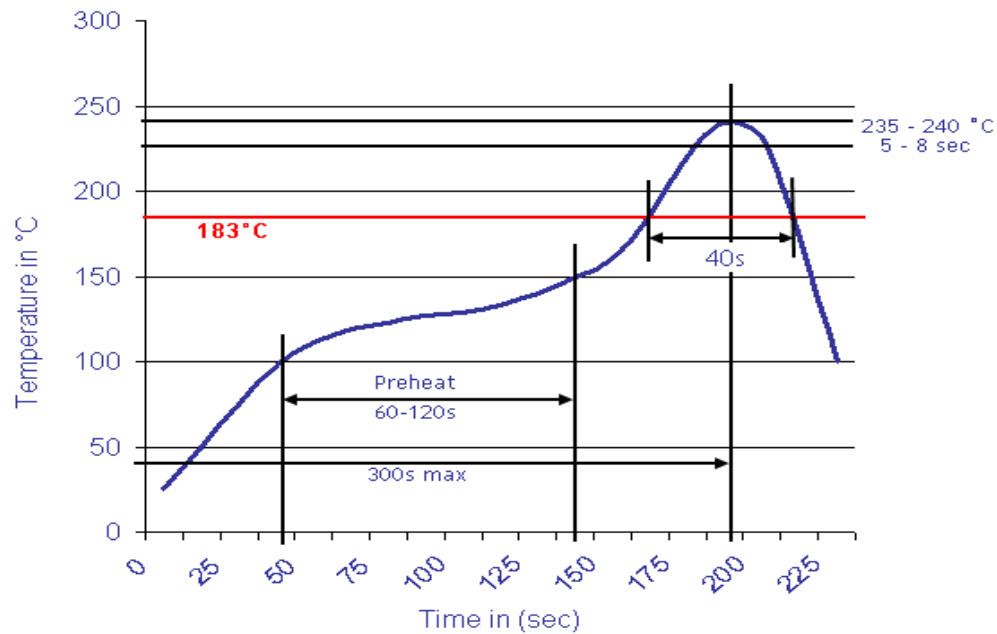

Pluggable Terminal Block /
Pitch 3.50mm

Part No.: A14G020

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	3 from 3

Customer: