

EDCON-COMPONENTS



Drawing

Specification

APPROVAL



Electrical

Standard
Rated voltage
Rated current

cUL
AC 150V
5A

Mechanical

Ambient temperature

-40°C ~ +105°C

Dimensions

Pitch
Poles

3.50mm
2P - 40P

Material

Housing
Solder pin

PA66 (UL94V-0)
Brass, Tin plated

P.C.B. Layout

	A[mm]		A[mm]
02P	3.5	26P	45.5
04P	7.0	28P	49.0
06P	10.5	30P	52.5
08P	14.0	32P	56.0
10P	17.5	34P	59.5
12P	21.0	36P	63.0
14P	24.5	38P	66.5
16P	28.0	40P	70.0
18P	31.5		
20P	35.0		
22P	38.5		
24P	42.0		



Certification



Pluggable Terminal Block /
Pitch 3.50mm

Part No.: A14G021

Customer:

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A14G021	-	XX	XX	-	X
		XX = total	WH - white		
		02	GN - green		
		...	GR - gray		
		40	TP - transparent		
			OR - orange		
			BK - black		
			BL - blue		
			RD - red		
			YW - yellow		
			PG - Phoenix Green		



Pluggable Terminal Block / Pitch 3.50mm	
Part No.:	A14G021
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike		Sheet No.		2 from 3


www.edcon-components.com

email: info@edcon-components.com



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

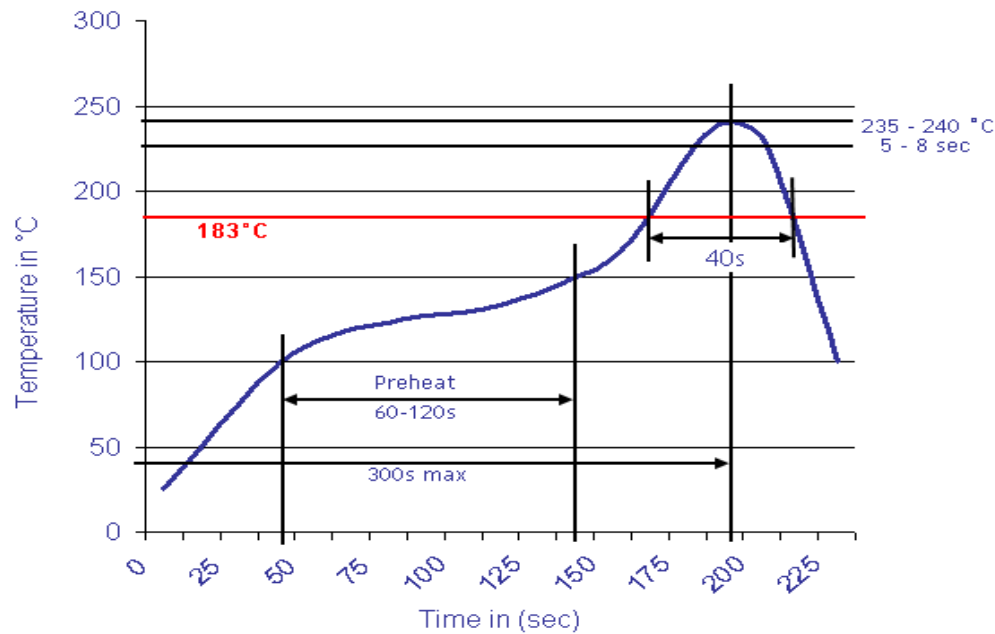

Pluggable Terminal Block / Pitch 3.50mm	
Part No.:	A14G021
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	3 from 3