

EDCON-COMPONENTS



Drawing

Specification

APPROVAL



Electrical

Standard	cUL
Rated voltage	AC 300V
Rated current	10A
Wire range	28-14 AWG

Mechanical

Ambient temperature	-40°C ~ +105°C
---------------------	----------------

Dimensions

Pitch	3.81mm
Poles	2P - 24P

Material

Housing	PA66 (UL94V-0)
Pin header	Phosphor Bronze, Tin plated
Spring	Stainless strip steel

P.C.B. Layout

	A[mm]		A[mm]	
02P	10.82	14P	56.54	
03P	14.63	15P	60.35	
04P	18.44	16P	64.16	
05P	22.25	17P	67.97	
06P	26.06	18P	71.78	
07P	29.87	19P	75.59	
08P	33.68	20P	79.40	
09P	37.49	21P	83.21	
10P	41.30	22P	87.02	
11P	45.11	23P	90.83	
12P	48.92	24P	94.64	
13P	52.73			



[Certification](#)



Pluggable Terminal Block /
Pitch 3.81mm

Part No.: A14H003

Customer:

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A14H003	-	XX	XX	-	X
		XX = total	WH - white		
		02	GN - green		
		...	GR - gray		
		24	TP - transparent		
			OR - orange		
			BK - black		
			BL - blue		
			RD - red		
			YW - yellow		
			PG - Phoenix Green		



[Certification](#)



Pluggable Terminal Block / Pitch 3.81mm	
Part No.:	A14H003
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike		Sheet No.		2 from 3


www.edcon-components.com

email: info@edcon-components.com



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

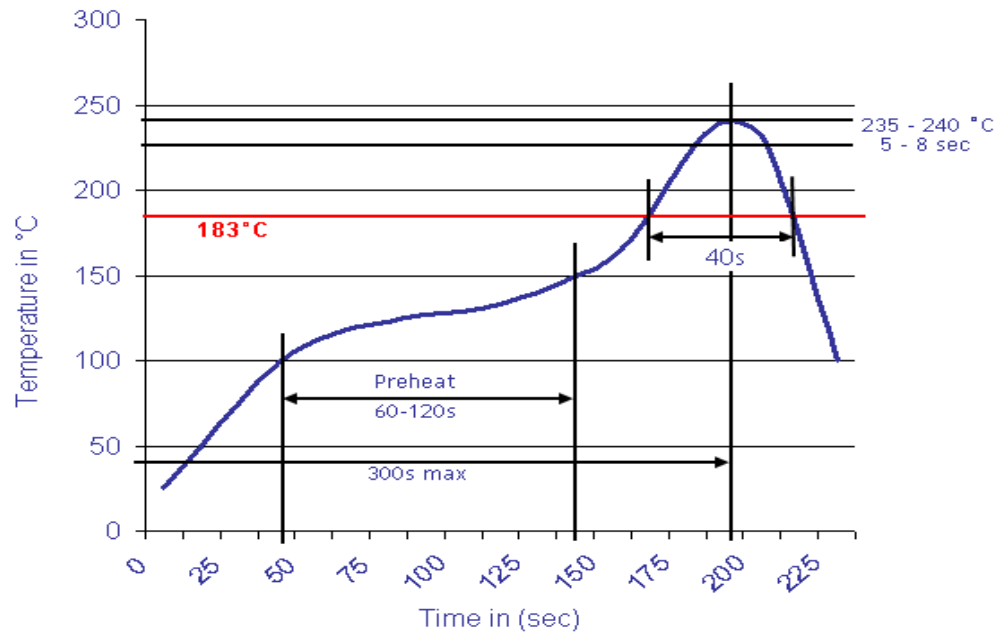

Pluggable Terminal Block / Pitch 3.81 mm	
Part No.:	A14H003
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	3 from 3