

EDCON-COMPONENTS



Drawing

Specification

APPROVAL



Electrical

Standard	cUL
Rated voltage	AC 300V
Rated current	10A
Wire range	28-14 AWG

Mechanical

Ambient temperature	-40°C ~ +105°C
---------------------	----------------

Dimensions

Pitch	3.81mm
Poles	2P - 24P

Material

Housing	PA66 (UL94V-0)
Pin header	Phosphor Bronze, Tin plated
Spring	Stainless strip steel

P.C.B. Layout

	A[mm]		A[mm]	
02P	9.12	14P	54.84	
03P	12.93	15P	58.65	
04P	16.74	16P	62.46	
05P	20.55	17P	66.27	
06P	24.36	18P	70.08	
07P	28.17	19P	73.89	
08P	31.98	20P	77.70	
09P	35.79	21P	81.51	
10P	39.60	22P	85.32	
11P	43.41	23P	89.13	
12P	47.22	24P	92.94	
13P	51.03			



[Certification](#)



Pluggable Terminal Block /
Pitch 3.81mm

Part No.: A14H004

Customer:

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	1 from 3

www.edcon-components.com

email: info@edcon-components.com



Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A14H004	-	XX	XX	-	X
		XX = total	WH - white		
		02	GN - green		
		...	GR - gray		
		24	TP - transparent		
			OR - orange		
			BK - black		
			BL - blue		
			RD - red		
			YW - yellow		
			PG - Phoenix Green		



Certification




Pluggable Terminal Block / Pitch 3.81mm	
Part No.:	A14H004
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike		Sheet No.		2 from 3



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

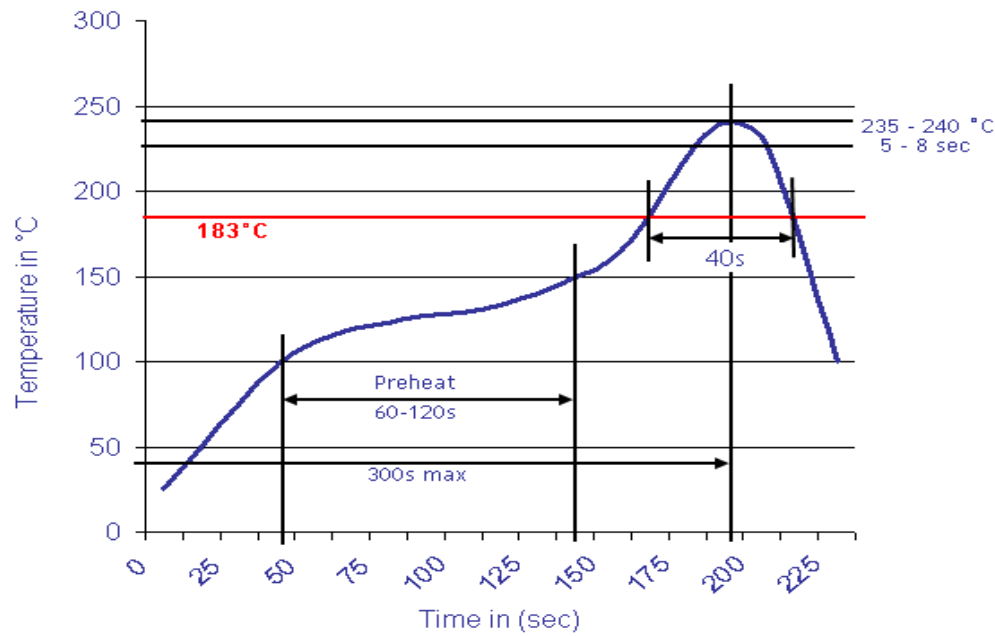

Pluggable Terminal Block /
Pitch 3.81 mm

Part No.: A14H004

Customer:

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	3 from 3