



EDCON-COMPONENTS



Drawing

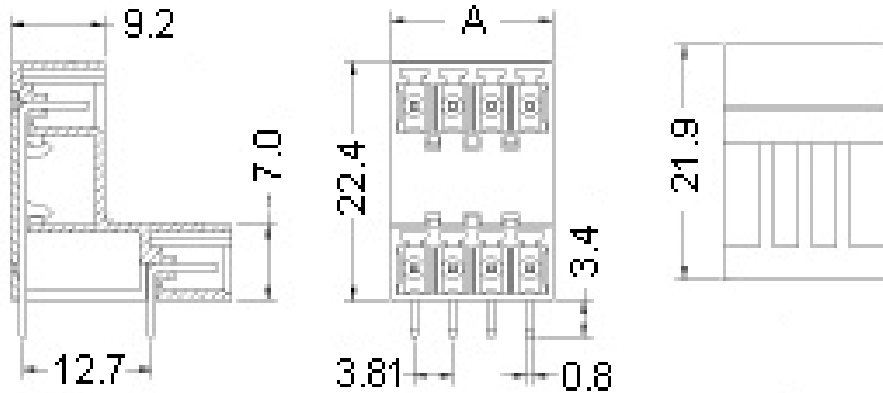

P.C.B. Layout

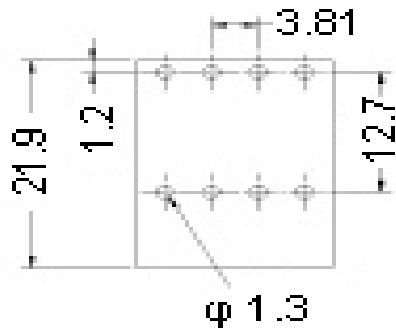

	A[mm]		A[mm]
04P	8.4	28P	54.1
06P	12.2	30P	57.9
08P	16.0	32P	61.7
10P	19.8	34P	65.6
12P	23.6	36P	69.4
14P	27.5	38P	73.2
16P	31.3	40P	77.0
18P	35.1		
20P	38.9		
22P	42.7		
24P	46.5		
26P	50.3		

Specification

APPROVAL

Electrical

Standard
Rated voltage
Rated current

Mechanical

Ambient temperature

Dimensions

Pitch
Poles

Material

Housing
Pin header



cUL	VDE
AC 300V	AC 300V
10A	8A

-40°C ~ +105°C

3.81mm
4P - 40P

PA66 (UL94V-0)
Brass, Tin plated



[Certification](#)



Pluggable Terminal Block /
Pitch 3.81mm

Part No.: A14H021

Customer:

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	1 from 3

www.edcon-components.com

email: info@edcon-components.com




Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A14H021	-	XX	XX	-	X
		XX = total	WH - white		
		04	GN - green		
		...	GR - gray		
		40	TP - transparent		
			OR - orange		
			BK - black		
			BL - blue		
			RD - red		
			YW - yellow		
			PG - Phoenix Green		




Pluggable Terminal Block / Pitch 3.81 mm	
Part No.:	A14H021
Customer:	

DRW:	Justin	CHKD:	Frank	MATL:	Jordan	TOLERANCE:	Lord	Date:	10.02.2009
APPD:	Pete	FINISH:	Mike				Sheet No.:		2 from 3



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

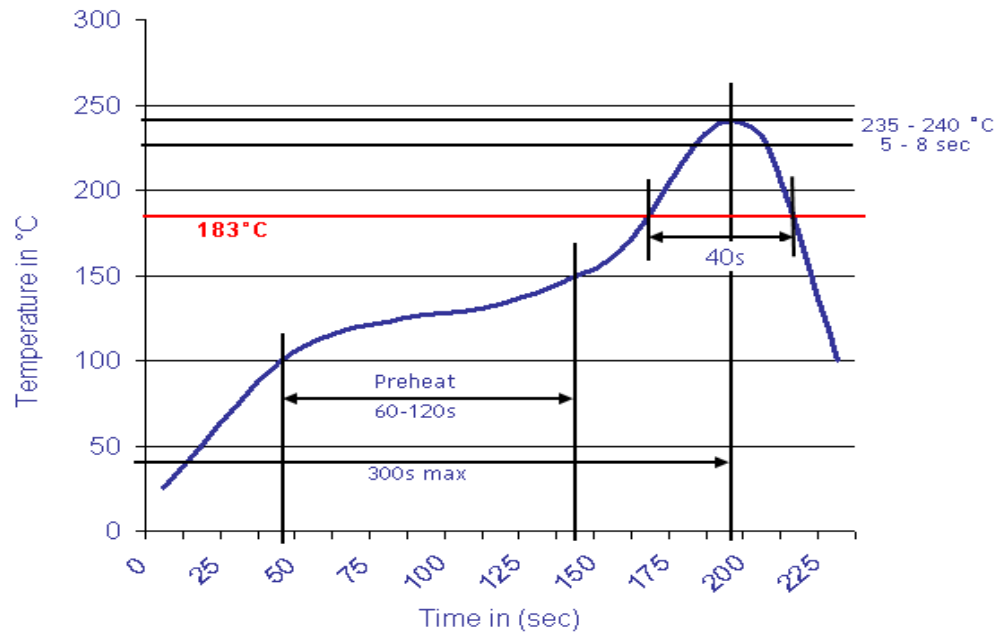

Pluggable Terminal Block /
Pitch 3.81 mm

Part No.: A14H021

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	3 from 3

Customer: