

# Data Sheet

## Screwless Terminal Block

**Pitch: 5,00 mm**

**Serie: A11L071**

### Customer Information for special Item

**EDCON Customer : 0**

**Customer Version No. : 0**

# EDCON-COMPONENTS



## Technical Description

## Drawing (Dimension in mm)

### Electrical

Rated Voltage	250Volt
Rated Current	10A
Wire Range	
Solid Wire	0,3 ~ 1,5mm <sup>2</sup>
Stranged Wire	0,3 ~ 1,5mm <sup>2</sup>
Withstanding Voltage	1,6KV
Insulation Resistance	2500MΩ / 1000V

### Mechanical




Operating Temperature	-40°C ~ +115°C
Wire Strip Length	9-10mm

### Dimensions

Pitch (mm)	5,00
Poles	2 + 3 ~ 24 Pos.

### Materials

1	Body	Thermoplastic ( UL94V-0)
2	Cover	Thermoplastic ( UL94V-0)
3	Lever	Thermoplastic ( UL94V-0)
4	Contact Pin	Brass Tin-plated
5	Spring Clamp	Stainless Steel

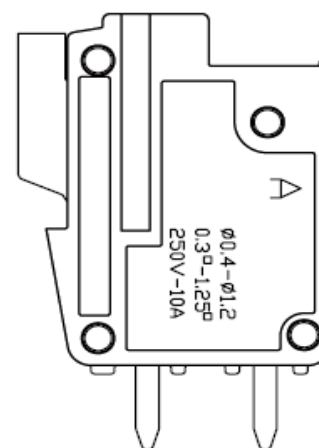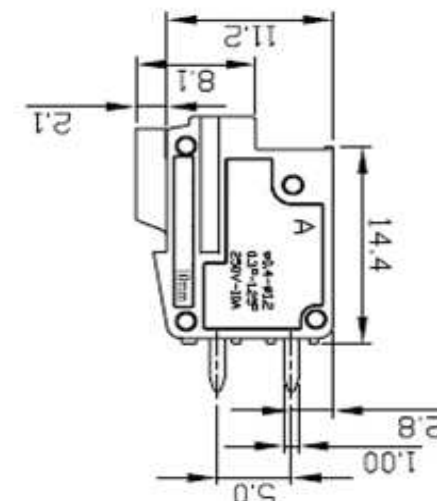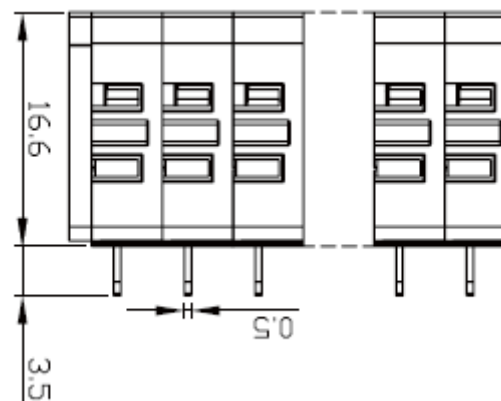

### Screwless Terminal Block

Part No.: **A11L071**

Customer:


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

# EDCON-COMPONENTS



Drawing (Dimension in mm)

Dimensions (mm)

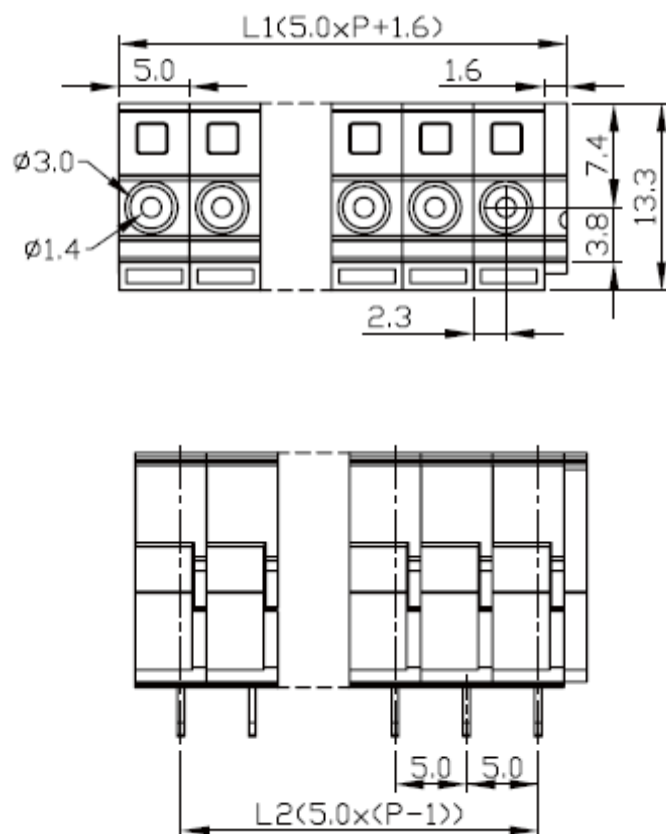

No. of Pos.	L1	Tol. P	L2	Tol. P
02	11,60	± 0,35	5,00	± 0,35
03	16,60	± 0,35	10,00	± 0,35
04	21,60	± 0,35	15,00	± 0,35
05	26,60	± 0,35	20,00	± 0,35
06	31,60	± 0,35	25,00	± 0,35
07	36,60	± 0,35	30,00	± 0,35
08	41,60	± 0,35	35,00	± 0,35
09	46,60	± 0,35	40,00	± 0,35
10	51,60	± 0,35	45,00	± 0,35
11	56,60	± 0,35	50,00	± 0,35
12	61,60	± 0,35	55,00	± 0,35
13	66,60	± 0,35	60,00	± 0,35
14	71,60	± 0,35	65,00	± 0,35
15	76,60	± 0,35	70,00	± 0,35
16	81,60	± 0,35	75,00	± 0,35
17	86,60	± 0,35	80,00	± 0,35
18	91,60	± 0,35	85,00	± 0,35
19	96,60	± 0,35	90,00	± 0,35
20	101,60	± 0,35	95,00	± 0,35
21	106,60	± 0,35	100,00	± 0,35
22	111,60	± 0,35	105,00	± 0,35
23	116,60	± 0,35	110,00	± 0,35
24	121,60	± 0,35	115,00	± 0,35

## Screwless Terminal Block

Part No.: **A11L071**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 4	

# EDCON-COMPONENTS



## Ordering Informations

Serie	No. of Pos.	Body Color	Approval	Approval Code	ROHS	Packing	EDCON Cust. No.	Customer Version		
<b>A11L071</b>	<b>02</b>	<b>BL</b>	<b>N</b>	<b>N</b>	<b>R</b>	<b>B</b>				

Pitch  
5,00

<b>02=</b> Number of Pos. Standard 2 ~ 24Pos.	<b>BL=</b> Blue (Standard)	<b>N=</b> No Approval	<b>N=</b> NON Approval	<b>R=</b> ROHS Conform <b>N=</b> NON ROHS Conform	<b>B=</b> Standard Package <b>I=</b> Individual Package	<b>xxxxxx=</b> Customer Number	<b>xxx=</b> Customer Version ??(Printing)


<b>Screwless Terminal Block</b>	
Part No.:	<b>A11L071</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.02.2014
APPD:	Schumi			FINISH	Jamy			Sheet No.	3 from 4



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

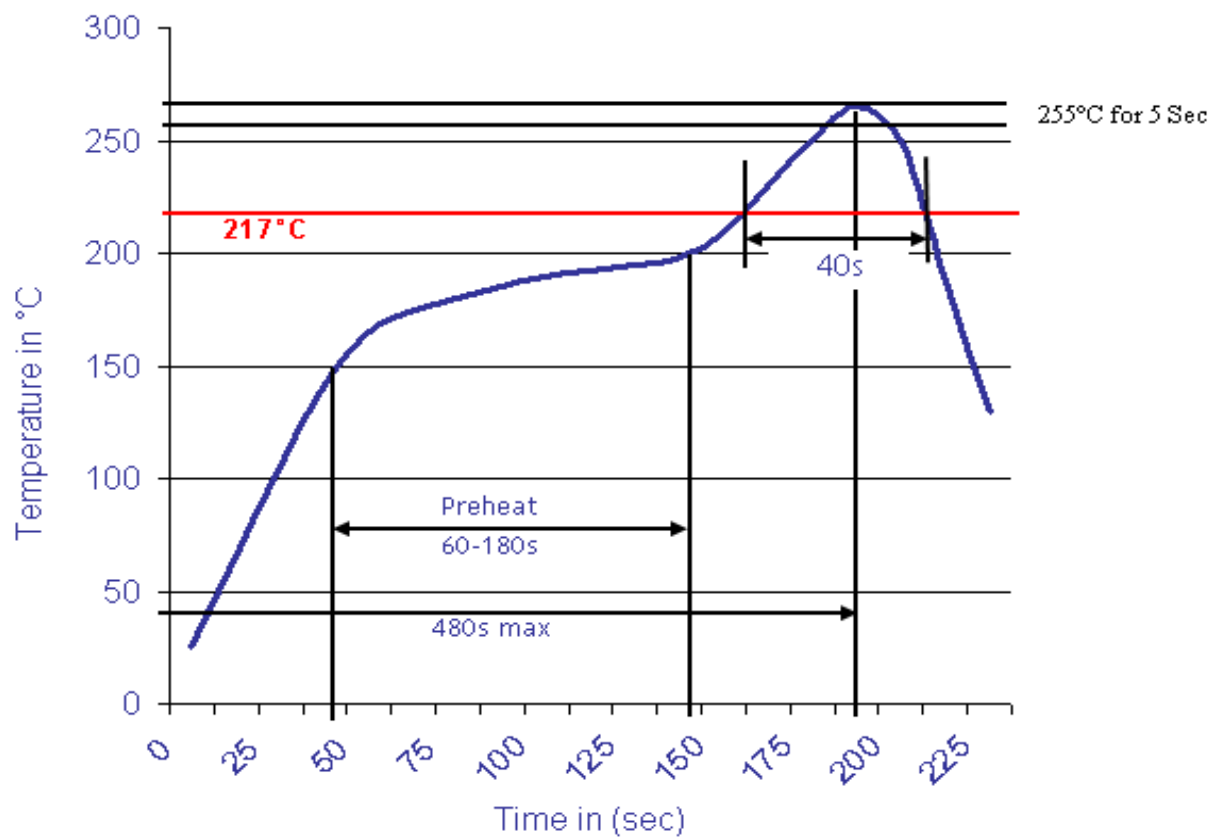

**Screwless Terminal Block**

Part No.: **A11L071**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	