



# EDCON-COMPONENTS




## Specifications

Current Rating:	3 Ampere
Insulator Resistance:	5000 Megaohm min.
Dielectric Withstanding:	AC 1000V
Operating Temperature:	.-40°C to +105°C
Contact Material:	Copper, Alloy
Insulator Material:	Polyester, UL 94V-0
Standard:	P.B.T.
Contact Plating:	Tin, Gold or Selective Plated
Standard:	Gold Flash Overall
Selectiv Plating:	Gold flash plated on contact area / tin plated on solder area
Max. Prozessing Temp.	230°C for 60 seconds

## P.C.B Layout

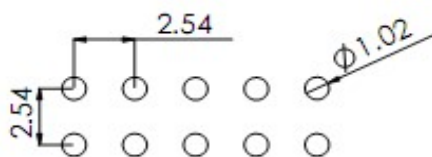

## Drawing ( dimensions all into mm)

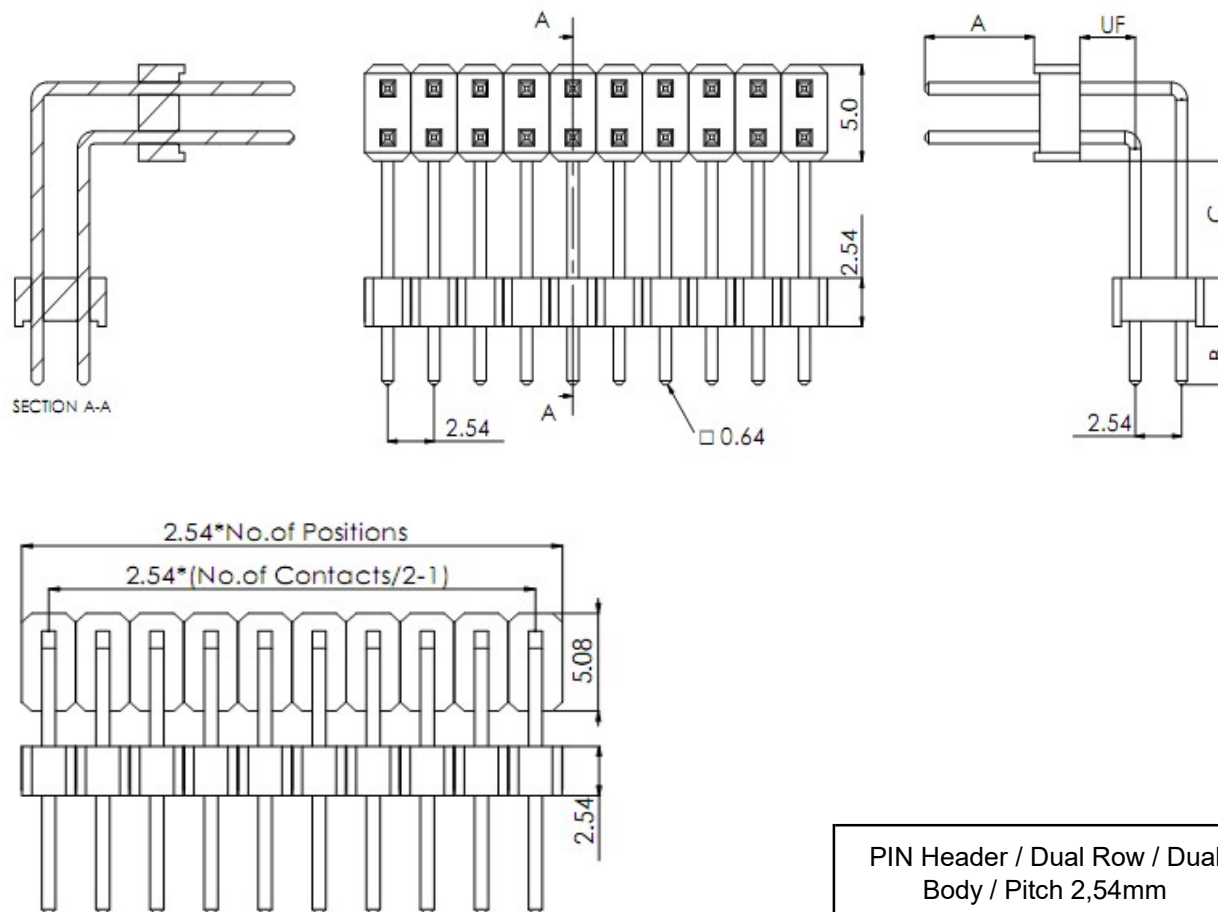


PIN Header / Dual Row / Dual Body / Pitch 2,54mm	
Part No.:	<b>T51A1007-</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.03.2023
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 5

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)

# EDCON-COMPONENTS



## Pin Code length table free configuration

Order Code	Dimension (mm)			
	A	B	C	UF
A01	6,00	3,00	6,00	3,00
A02	3,30	7,96	4,50	1,36
A03	4,80	3,30	4,90	1,40
A04	4,60	3,30	5,96	1,36
A05				
A06				
A07				
A08				
A09				
A10				
A11				
A12				
A13				
A14				
A15				
A16				
A17				
A18				
A19				
A20				
A21				
A22				

Order Code	Dimension (mm)			
	A	B	C	L
A23				
A24				
A25				
A26				
A27				
A28				
A29				
A30				
A31				
A32				
A33				
A34				
A35				
A36				
A37				
A38				
A39				
A40				
A41				
A42				
A43				
A44				

Order Code	Dimension (mm)			
	A	B	C	L
A45				
A46				
A47				
A48				
A49				
A50				
A51				
A52				
A53				
A54				
A55				
A56				
A57				
A58				
A59				
A60				
A61				
A62				
A63				
A64				
A65				
A66				


PIN Header / Dual Row / Dual Body / Pitch 2,54mm

Part No.: **T51A1007-**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.03.2023
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 5

Customer:

# EDCON-COMPONENTS



## Ordering Informations


Serie	No. of Pos.	Construction	Contact Plating	Material	Polarisation Peg	Pin Length Code	ROHS	Packing	Special construction
<b>T51A1007-</b>	<b>XX</b>	<b>RT</b>	<b>G0</b>	<b>PB</b>	<b>N</b>	<b>A01</b>	<b>R</b>	<b>BU</b>	<b>A</b>

<b>XX</b> = total pin of header	<b>RT</b> = right angle THT	<b>G0</b> = Gold Flash (Standard)	<b>PB</b> =P.B.T (Standard)	<b>N</b> = No	look table page 2	<b>N</b> =NO ROHS conform	<b>BU</b> = Bulk (Standard)	<b>A</b> = Please look Page 6 for Special construction of Pin Header
<b>T0</b> = Tin plated	<b>GA</b> = 10µ Gold Plating	<b>PY</b> = Polyester UL94V-0	<b>R</b> =ROHS conform			<b>TU</b> = Tube w/o Cap		
<b>GB</b> = 15µ Gold Plating	<b>GC</b> = 20µ Gold Plating	<b>NY</b> = Nylon-6T				<b>TC</b> = Tube w. pic and Place Cap		
<b>S0</b> = Selectiv Plating Gold Flash / Tin						<b>TY</b> = Tray packing w/o Cap		
<b>TN</b> = Tin Plated						<b>TR</b> = Tape/Reel w. pic and Place Cap		


PIN Header / Dual Row / Dual Body / Pitch 2,54mm
Part No.: <b>T51A1007-</b>
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.03.2023
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 5


# EDCON-COMPONENTS



## Soldering Profile for Lead Soldering ( P.B.T. )

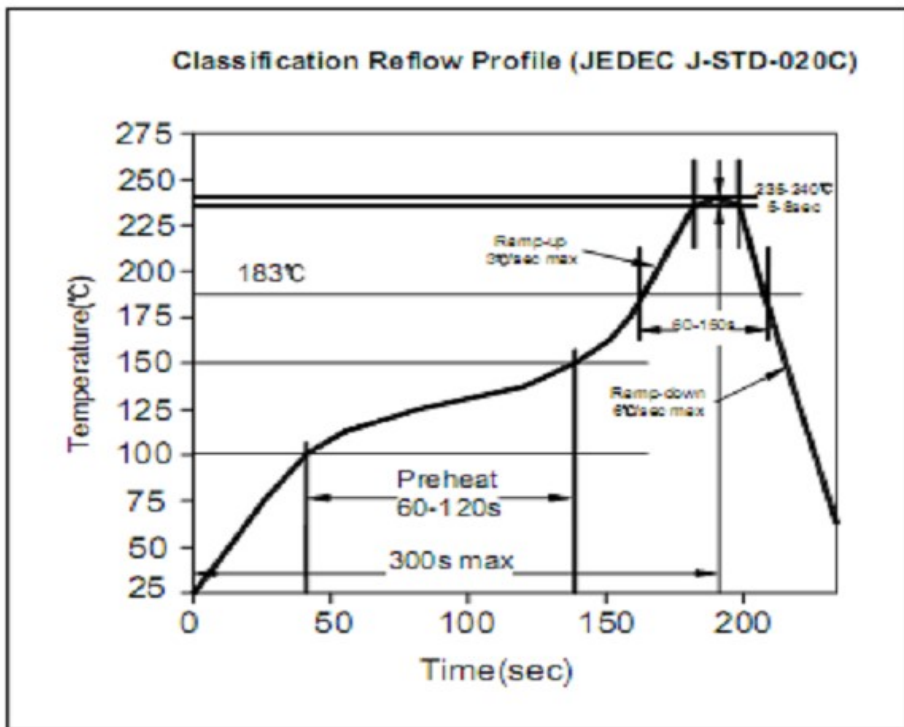

## Soldering Profile for Lead Free Soldering ( Nylon 6T )

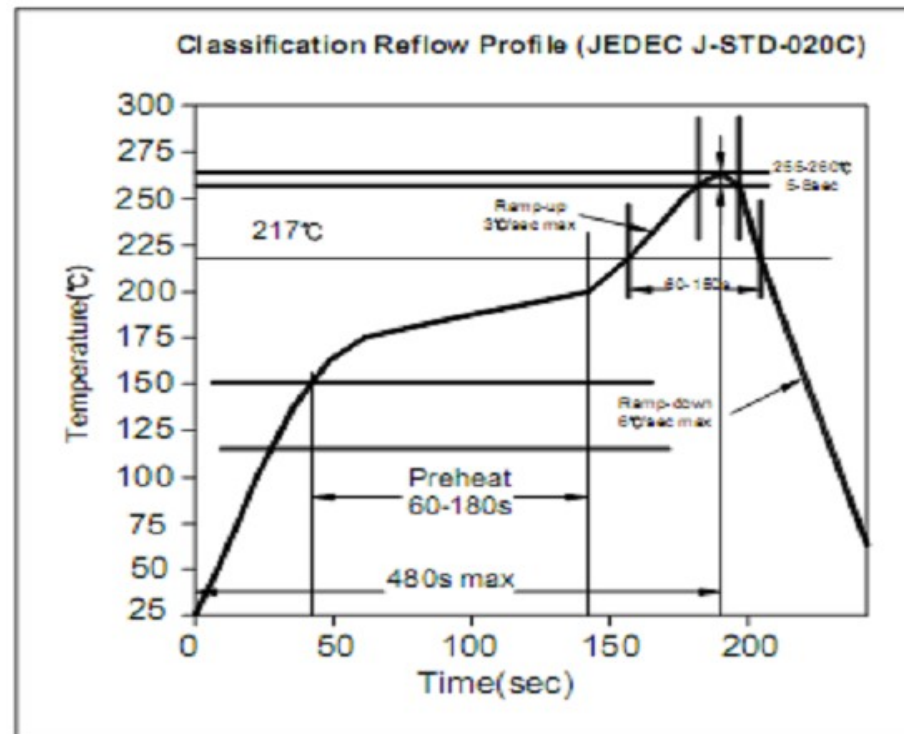

PIN Header / Dual Row / Dual Body / Pitch 2,54mm


Part No.: **T51A1007-**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.03.2023	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 5		


[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)

# EDCON-COMPONENTS



Special construction A

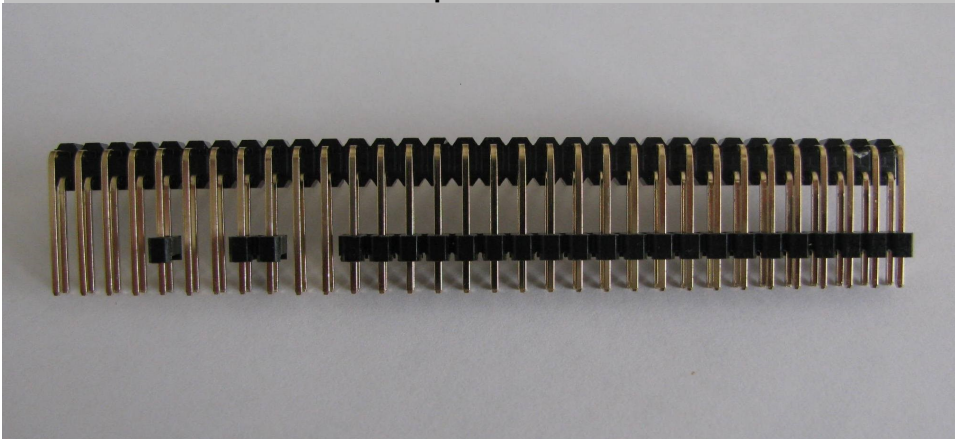

PIN Header / Dual Row / Dual Body / Pitch 2,54mm	
Part No.:	<b>T51A1007-</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.03.2023
APPD:	Schumi			FINISH	Jamy		Sheet No.		4 from 5

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)