



EDCON-COMPONENTS





Specifications

Current Rating:	3 Ampere
Insulator Resistance:	5000 Megaohm min.
Dielectric Withstanding:	AC 1000V
Operating Temperature:	-.40°C to +105°C
Contact Material:	Copper, Alloy
Insulator Material:	Polyester, UL 94V-0
Standard:	P.B.T.
Contact Plating:	Tin, Gold or Selective Plated
Standard:	Gold Flash Overall
Selectiv Plating:	Gold flash plated on contact area / tin plated on solder area
Max. Prozessing Temp.	230°C for 60 seconds

P.C.B Layout

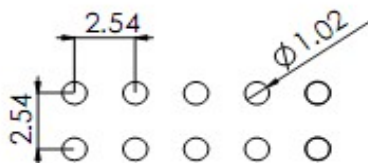

Drawing (dimensions all into mm)

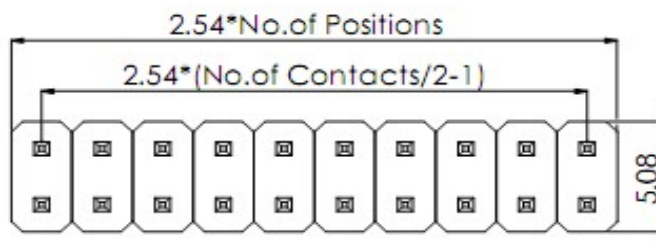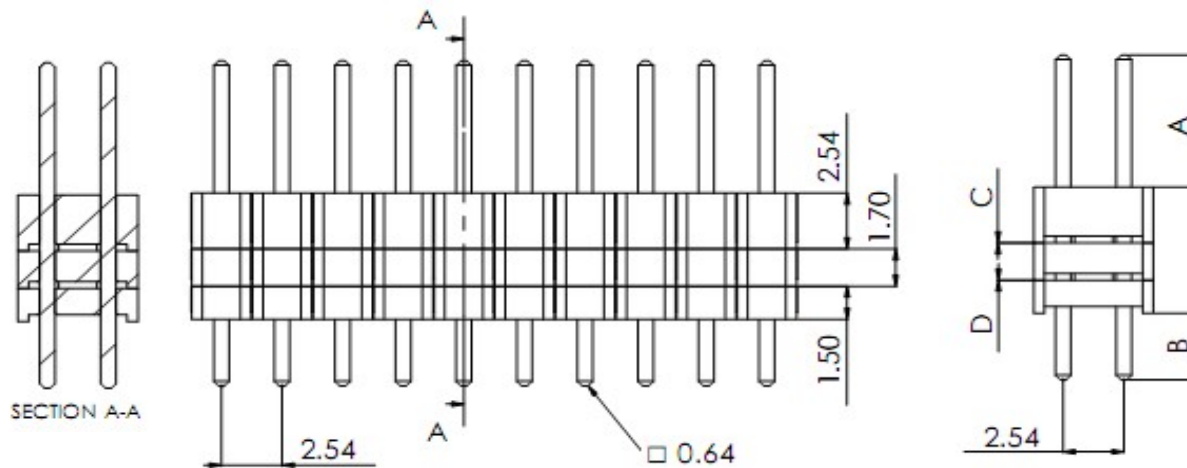

PIN Header / Dual Row / Tripple
Body / Pitch 2,54mm

Part No.: **T51A1026 -**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.03.2023
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 4

Customer:

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Pin Code length table free configuration

Order Code	Dimension (mm)				TL
	A	B	C	D	
A01	6,00	3,00	0,00	0,00	14,74
A02	6,00	3,00	1,00	1,00	16,74
A03	6,00	3,00	1,50	1,50	17,74
A04	6,00	3,00	2,00	2,00	18,74
A05	6,00	3,00	2,50	2,50	19,74
A06	6,00	3,00	3,00	3,00	20,74
A07	6,00	3,00	3,50	3,50	21,74
A08	6,00	3,00	4,00	4,00	22,74
A09	6,00	3,00	4,50	4,50	23,74
A10	6,00	3,00	5,00	5,00	24,74
A11	6,00	3,00	5,50	5,50	25,74
A12	6,00	3,00	6,00	6,00	26,74
A13	6,00	3,00	6,50	6,50	27,74
A14	6,00	3,00	7,00	7,00	28,74
A15	6,00	3,00	7,50	7,50	29,74
A16	6,00	3,00	8,00	8,00	30,74
A17	6,00	3,00	8,50	8,50	31,74
A18	6,00	3,00	9,00	9,00	32,74
A19	6,00	3,00	9,50	9,50	33,74
A20	6,00	3,00	10,00	10,00	34,74
A21	6,00	3,00	10,50	10,50	35,74
A22	6,00	3,00	11,00	11,00	36,74
A23	6,00	3,00	11,50	11,50	37,74
A24	6,00	3,00	12,00	12,00	38,74
A25	6,00	3,00	12,50	12,50	39,74
A26	6,00	3,00	13,00	13,00	40,74
A27	6,00	3,00	13,50	13,50	41,74

Order Code	Dimension (mm)				TL
	A	B	C	D	
A28	3,00	3,00	0,00	0,00	11,74
A29	3,00	3,00	1,00	1,00	13,74
A30	3,00	3,00	1,50	1,50	14,74
A31	3,00	3,00	2,00	2,00	15,74
A32	3,00	3,00	2,50	2,50	16,74
A33	3,00	3,00	3,00	3,00	17,74
A34	3,00	3,00	3,50	3,50	18,74
A35	3,00	3,00	4,00	4,00	19,74
A36	3,00	3,00	4,50	4,50	20,74
A37	3,00	3,00	5,00	5,00	21,74
A38	3,00	3,00	5,50	5,50	22,74
A39	3,00	3,00	6,00	6,00	23,74
A40	3,00	3,00	6,50	6,50	24,74
A41	3,00	3,00	7,00	7,00	25,74
A42	3,00	3,00	7,50	7,50	26,74
A43	3,00	3,00	8,00	8,00	27,74
A44	3,00	3,00	8,50	8,50	28,74
A45	3,00	3,00	9,00	9,00	29,74
A46	3,00	3,00	9,50	9,50	30,74
A47	3,00	3,00	10,00	10,00	31,74
A48	3,00	3,00	10,50	10,50	32,74
A49	3,00	3,00	11,00	11,00	33,74
A50	3,00	3,00	11,50	11,50	34,74
A51	3,00	3,00	12,00	12,00	35,74
A52	3,00	3,00	12,50	12,50	36,74
A53	3,00	3,00	13,00	13,00	37,74
A54	3,00	3,00	13,50	13,50	38,74

Order Code	Dimension (mm)				TL
	A	B	C	D	
A55					5,74
A56					5,74
A57					5,74
A58					5,74
A59					5,74
A60					5,74
A61					5,74
A62					5,74
A63					5,74
A64					5,74
A65					5,74
A66					5,74
A67					5,74
A68					5,74
A69					5,74
A70					5,74
A71					5,74
A72					5,74
A73					5,74
A74					5,74
A75					5,74
A76					5,74
A77					5,74

PIN Header / Dual Row / Tripple Body / Pitch 2,54mm


Part No.: **T51A1026 -**

DRW:	Jason	CHKD	Wilson
APPD:	Schumi		

MATL:	Wilson	TOLERANCE	Mason	DATE	03.03.2023
FINISH	Jamy		Sheet No.	2 from 4	

Customer:

EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pos.	Construction	Contact Plating	Material	Polarisation Peg	Pin Length Code	ROHS	Packing		
T51A1026 -	XX	ST	G0	PB	N	Axx	R	BU		

XX = total pin of header	ST = Straight THT	G0 = Gold Flash (Standard)	PB =P.B.T (Standard)	N = No	look table page 2	N =NO ROHS conform	BU = Bulk (Standard)
T0 = Tin plated	PY = Polyester UL94V-0	R =ROHS conform	TU = Tube w/o Cap				
GA = 10µ Gold Plating	NY = Nylon-6T		TC = Tube w. pic and Place Cap				
GB = 15µ Gold Plating			TY = Tray packing w/o Cap				
GC = 20µ Gold Plating			TR = Tape/Reel w. pic and Place Cap				
S0 = Selectiv Plating Gold Flash / Tin							


PIN Header / Dual Row / Tripple Body / Pitch 2,54mm
Part No.: T51A1026 -
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.03.2023
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4


www.edcon-components.com

email: info@edcon-components.com


EDCON-COMPONENTS



Soldering Profile for Lead Soldering (P.B.T.)

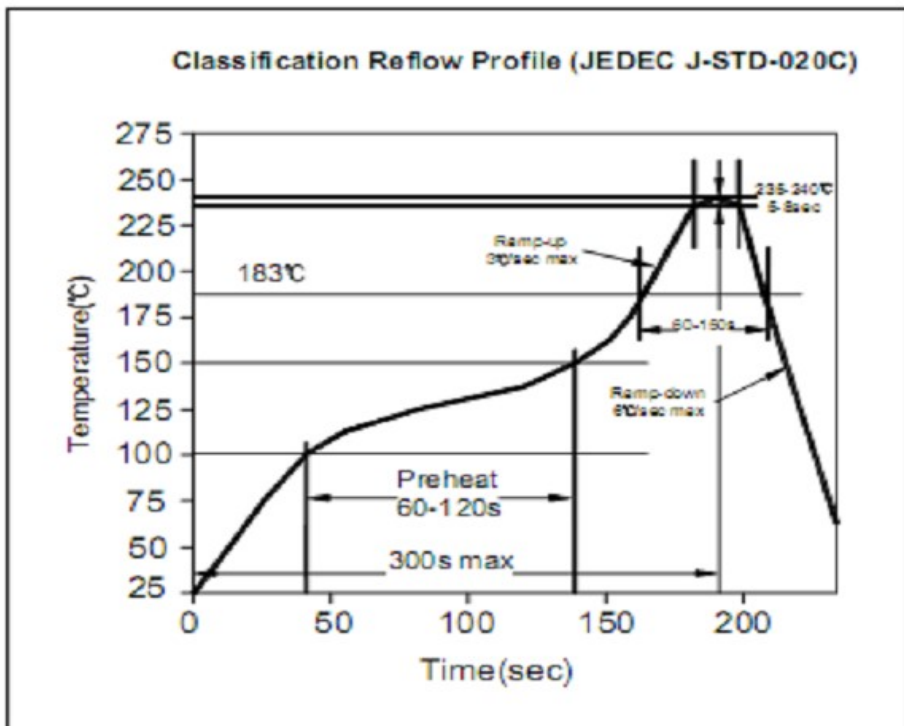

Soldering Profile for Lead Free Soldering (Nylon 6T)

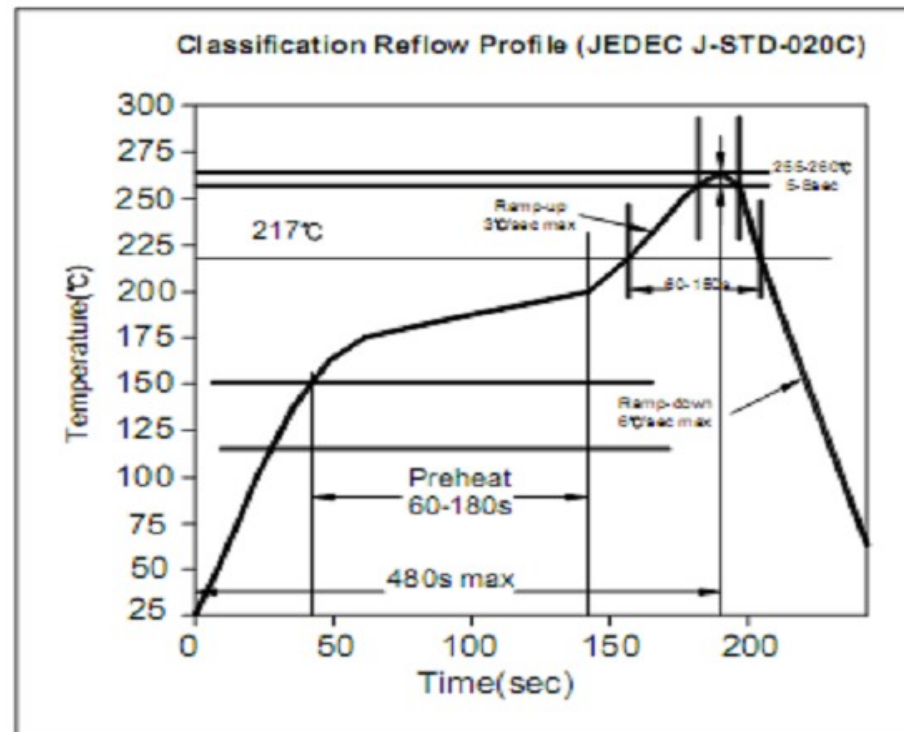

PIN Header / Dual Row / Tripple Body / Pitch 2,54mm

Part No.: **T51A1026 -**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.03.2023	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4		

www.edcon-components.com

email: info@edcon-components.com