



EDCON-COMPONENTS





Specifications

Current Rating:	3 Ampere
Insulator Resistance:	5000 Megaohm min.
Dielectric Withstanding:	AC 1000V
Operating Temperature:	-.40°C to +105°C
Contact Material:	Copper, Alloy
Insulator Material:	Polyester, UL 94V-0
Standard:	P.B.T.
Contact Plating:	Tin, Gold or Selective Plated
Standard:	Gold Flash Overall
Selectiv Plating:	Gold flash plated on contact area / tin plated on solder area
Max. Processing Temp.	230°C for 60 seconds

P.C.B Layout

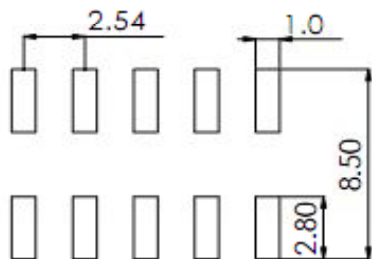


Drawing (dimensions all into mm)

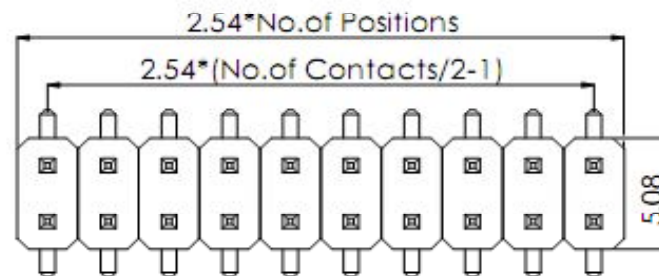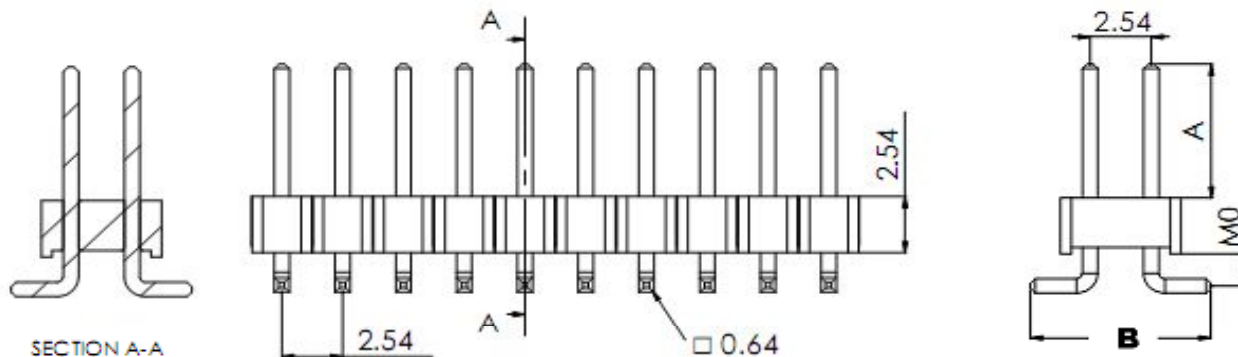

PIN Header / Dual Row / Single Body / Pitch 2,54mm	
Part No.:	T51A1038-
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	21.04.2023
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 4

EDCON-COMPONENTS



Pin Code length table free configuration

Order Code	Dimension (mm)		
	A	B	MO
A01	6,00	7,50	1,50
A02	5,80	7,62	1,30
A03	5,60	8,50	0,80
A04	3,50	7,60	0,94
A05	4,80	7,60	0,94
A06	6,10	7,60	0,94
A07	6,90	7,60	0,94
A08	9,90	7,60	0,94
A09	5,84	7,60	0,94
A10	8,13	7,60	0,94
A11	4,35	7,50	1,28
A12	5,84	7,50	1,27
A13	6,00	8,50	0,85
A14	10,50	7,50	0,94
A15	5,90	7,30	0,94
A16	5,00	7,50	1,50
A17	6,50	7,50	1,50
A18	7,00	7,50	1,50
A19	7,50	7,50	1,50
A20	8,00	7,50	1,50
A21	8,50	7,50	1,50
A22	9,00	7,50	1,50
A23	6,00	7,50	2,00
A24	6,00	7,50	2,50
A25	6,00	7,50	3,00
A26	6,00	7,50	3,50
A27	6,00	7,50	4,00


Order Code	Dimension (mm)		
	A	B	MO
A28	6,00	7,50	2,00
A29	6,00	7,50	2,50
A30	6,00	7,50	3,00
A31	6,00	7,50	3,50
A32	6,00	7,50	4,00
A33	6,00	7,50	4,50
A34	6,00	7,50	5,00
A35	6,00	7,50	5,50
A36	6,00	7,50	6,00
A37	6,00	7,50	6,50
A38	6,00	7,50	7,00
A39	6,00	7,50	7,50
A40	6,00	7,50	8,00
A41	6,00	7,50	8,50
A42	6,00	7,50	9,00
A43	6,00	7,50	9,50
A44	6,00	7,50	10,00
A45	3,00	7,50	1,50
A46	3,00	7,50	2,00
A47	3,00	7,50	2,50
A48	3,00	7,50	3,00
A49	3,00	7,50	3,50
A50	3,00	7,50	4,00
A51	3,00	7,50	4,50
A52	3,00	7,50	5,00
A53	3,00	7,50	5,50
A54	3,00	7,50	6,00

Order Code	Dimension (mm)		
	A	B	MO
A55	3,00	7,50	6,50
A56	3,00	7,50	7,00
A57	3,00	7,50	7,50
A58	3,00	7,50	8,00
A59	3,00	7,50	8,50
A60	3,00	7,50	9,00
A61	3,00	7,50	9,50
A62	3,00	7,50	10,00
A63			
A64			
A65			
A66			
A67			
A68			
A69			
A70			
A71			
A72			
A73			
A74			
A75			
A76			
A77			
A78			
A79			
A80			
A81			

PIN Header / Dual Row / Single Body / Pitch 2,54mm	
Part No.:	T51A1038-
Customer:	

DRW:	Jason	CHKD:	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	21.04.2023
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 4

EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pos.	Construction	Contact Plating	Material	Polarisation Peg	Pin Length Code	ROHS	Packing		
T51A1038-	XX	SS	G0	PB	N	A01	R	BU		

XX = total pin of header	SS = straight SMT	G0 = Gold Flash (Standard)	PB =P.B.T (Standard)	N = No	look table page 2	N =NO ROHS	BU = Bulk (Standard)
		T0 = Tin plated	PY = Polyester UL94V-0			R =ROHS conform	TU = Tube w/o Cap
		GA = 10µ Gold Plating	NY = Nylon-6T				TC = Tube w. pic and Place Cap
		GB = 15µ Gold Plating					TY = Tray packing w/o Cap
		GC = 20µ Gold Plating					TR = Tape/Reel w. pic and Place Cap
		S0 = Selectiv Plating Gold Flash / Tin					
		TN = Tin Plated					


PIN Header / Dual Row / Single Body / Pitch 2,54mm
Part No.: T51A1038-
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	21.04.2023
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4


www.edcon-components.com

email: info@edcon-components.com


EDCON-COMPONENTS



Soldering Profile for Lead Soldering (P.B.T.)

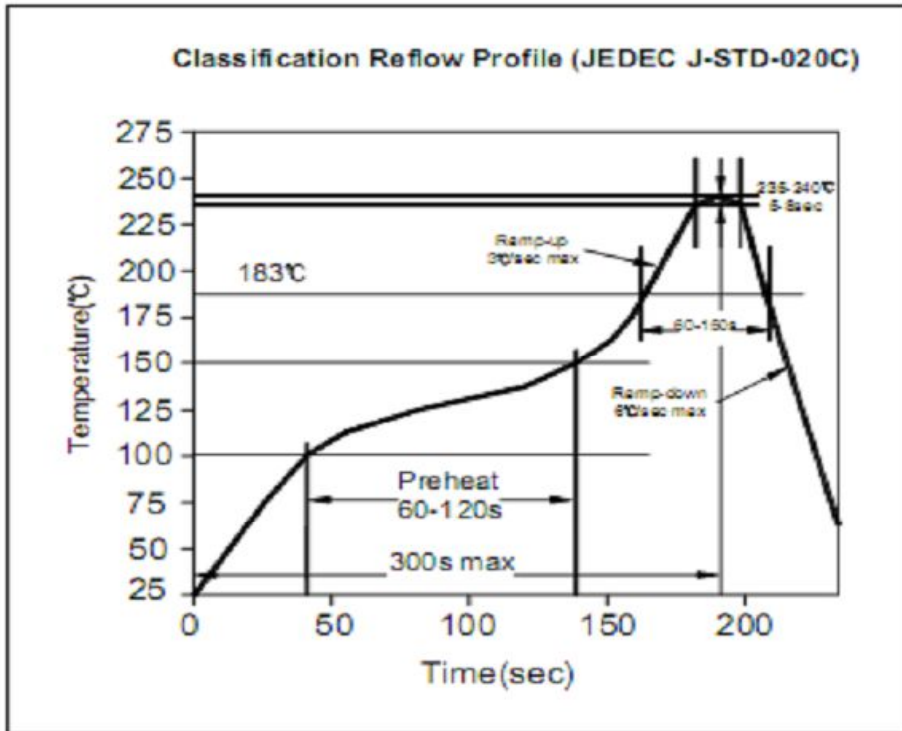

Soldering Profile for Lead Free Soldering (Nylon 6T)

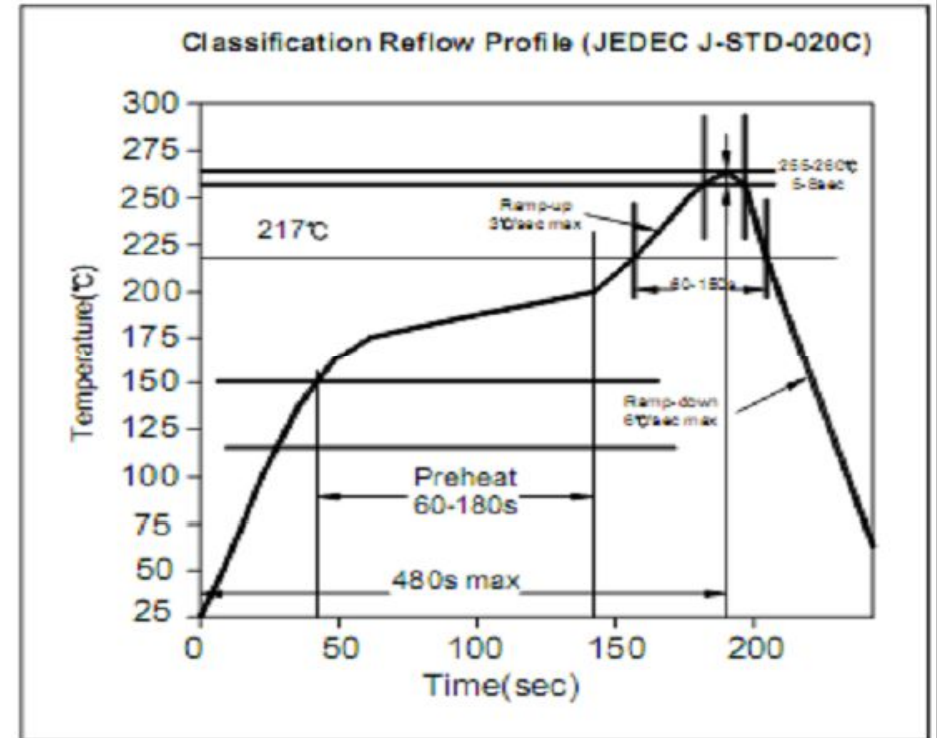

PIN Header / Dual Row / Single Body / Pitch 2,54mm

Part No.: **T51A1038-**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	21.04.2023
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	