


# EDCON-COMPONENTS



## Drawing

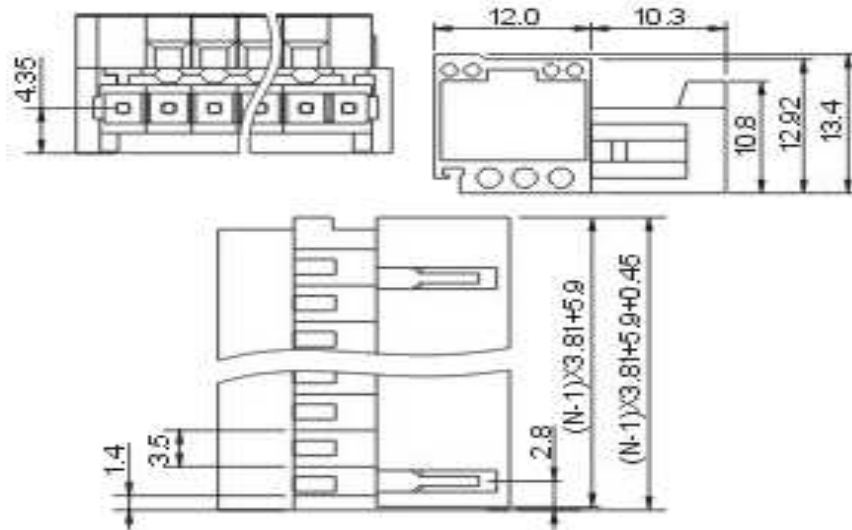

## P.C.B. Layout

## Specification

### Electrical

Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	10A
Wire range	28-14 AWG	1.5mm <sup>2</sup>
Withstanding voltage	AC 2000V/1min	

### Mechanical

Ambient temperature	-40°C ~ +105°C
Strip length	7mm

### Dimensions

Pitch	3.81mm
Poles	2P - 24P

### Material

Housing	PA66 (UL94V-0)
Pin header	Copper
Wire guard	Stainless steel



Pluggable Terminal Block /  
Pitch 3.81mm

Part No.: A14H030

Customer:

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	1 from 3

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)



## Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A14H030	-	XX	XX	-	X
		XX = total	WH - white		
		02	GN - green		
		...	GR - gray		
		24	TP - transparent		
			OR - orange		
			BK - black		
			BL - blue		
			RD - red		
			YW - yellow		
			PG - Phoenix Green		




Pluggable Terminal Block / Pitch 3.81mm	
Part No.:	A14H030
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	2 from 3



## Soldering - Profil

### Classification Reflow Profile (JEDEC J-STD-020C)

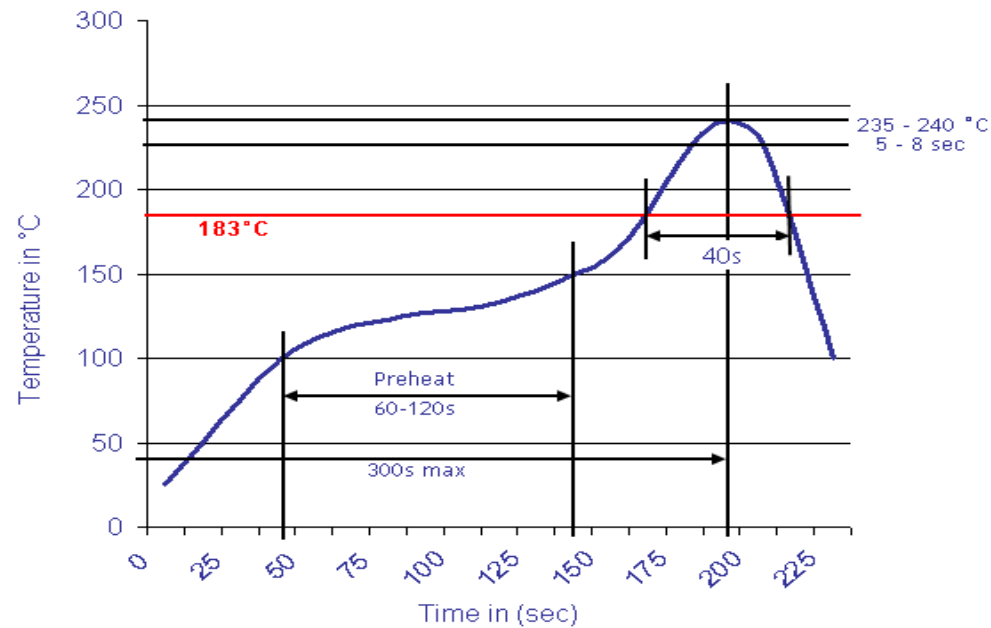

Pluggable Terminal Block /  
Pitch 3.81mm

Part No.: A14H030

Customer:

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	3 from 3