



EDCON-COMPONENTS



Drawing

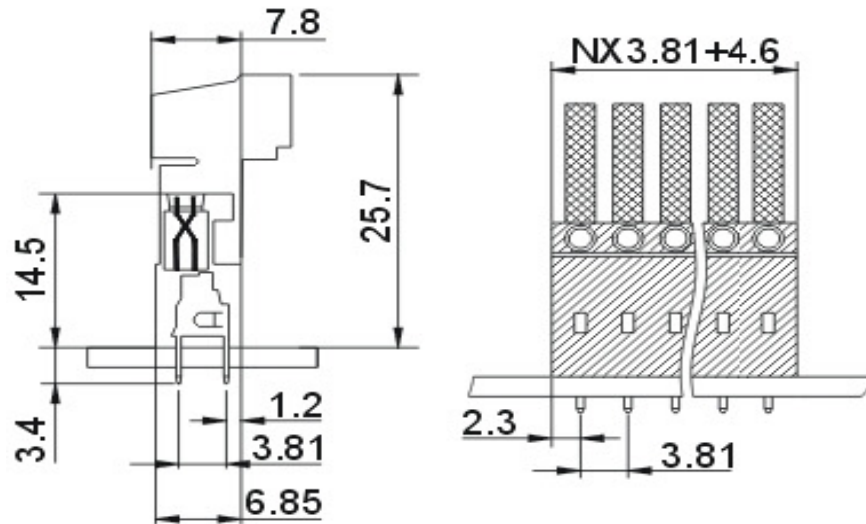

P.C.B. Layout

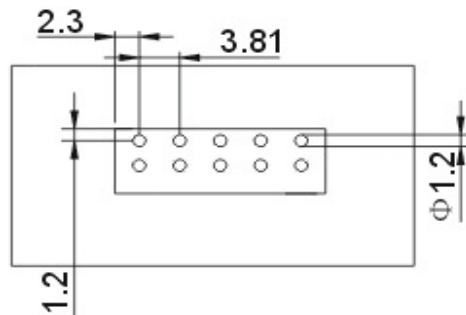

Specification

APPROVAL		(RU) pending	CE
Electrical			
Standard		UL	IEC
Rated voltage		300V	250V
Rated current		8A	7A
Withstanding voltage		AC 2000V/1min	
Mechanical			
Ambient temperature		-40°C ~ +105°C	
Dimensions			
Pitch		3.81mm	
Poles		2P - 24P	
Material			
Housing		PA66 (UL94V-0)	
Pin header		Phosphor Bronze, Tin plated	



Certification

Inverted Pluggable Terminal Block	
Pitch 3.81mm	
Part No.:	A14H034
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	20.09.2016
APPD:	Pete			FINISH	Mike			Sheet No.	1 from 3

EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pole	Body-Color	Approval	Approval Code	ROHS	Packing	EDCON Cust. No	Customer Version
A14H034	XX	PG	N	N	R	B		
	XX = total	WH - white	N= NON Approval	N= NON Approval	R= ROHS Conform	B= Standard Package Bulk-Ware	xxxxxx= Customer Number	xxxxxx= Customer Number for Printing ??
	02	GN - green						
	...	GR - gray						
	24	TP - transparent	1= Approval for Plastic Material	A= UL/UR Approval	N= NON ROHS Conform	I= Individual Package		
		OR - orange						
		BK - black	2= Approval for Terminal Block	B= VDE Approval Please consult EDCON				
	BL - blue							
	RD - red							
	YW - yellow		C= TÜV Approval Please consult EDCON					
	PG - Phoenix Green							




Certification

Inverted Pluggable Terminal Block	
Pitch 3.81mm	
Part No.:	A14H034
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	20.09.2016
APPD:	Pete			FINISH	Mike			Sheet No.	2 from 3


www.edcon-components.com

email: info@edcon-components.com

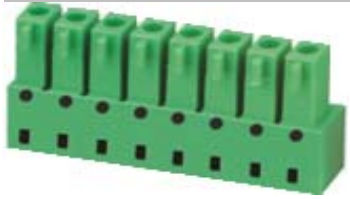

Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

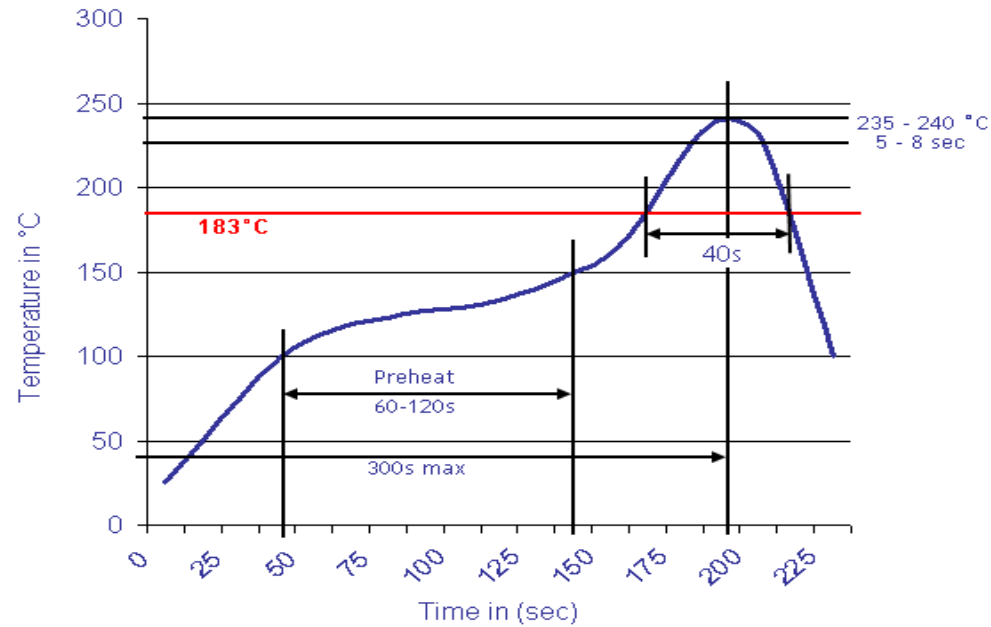

Inverted Pluggable Terminal Block	
Pitch 3.81mm	
Part No.:	A14H034
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	20.09.2016
APPD:	Pete			FINISH	Mike			Sheet No.	3 from 3