

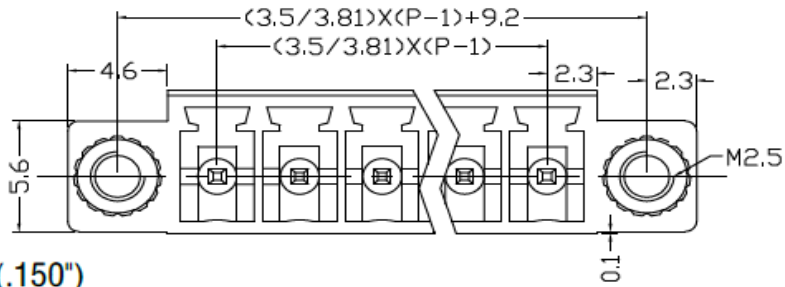


EDCON-COMPONENTS



Drawing

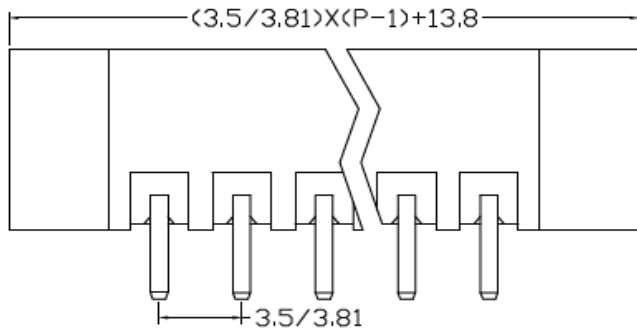

n(.150")

Specification

APPROVAL



Electrical

Standard
Rated voltage
Rated current
Withstanding voltage

UL	IEC
300V	250V
8A	7A
AC 2000V/1min	

Mechanical

Ambient temperature
Soldering Temperature:

-40°C ~ +140°C
270° for 10Sec.

Dimensions

Pitch
Poles

3.81mm
2P - 12P

Material

Housing
Pin header
Nut

PA46 (UL94V-0)
Brass, Tin plated
M2.5, Brass

Temperature

Pluggable Terminal Block /

Pitch 3.81mm

Part No.: A14H053

Customer:

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	28.03.2019
APPD:	Pete			FINISH	Mike			Sheet No.	1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A14H053	-	XX	BK	-	X
		XX = total	WH - white		
		02	GN - green		
		...	GR - gray		
		12	TP - transparent		
			OR - orange		
			BK - black		
			BL - blue		
			RD - red		
			YW - yellow		
			PG - Phoenix Green		

Pluggable Terminal Block / Pitch 3.81mm	
Part No.:	A14H053
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	28.03.2019
APPD:	Pete			FINISH	Mike		Sheet No.		2 from 3


www.edcon-components.com

email: info@edcon-components.com



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

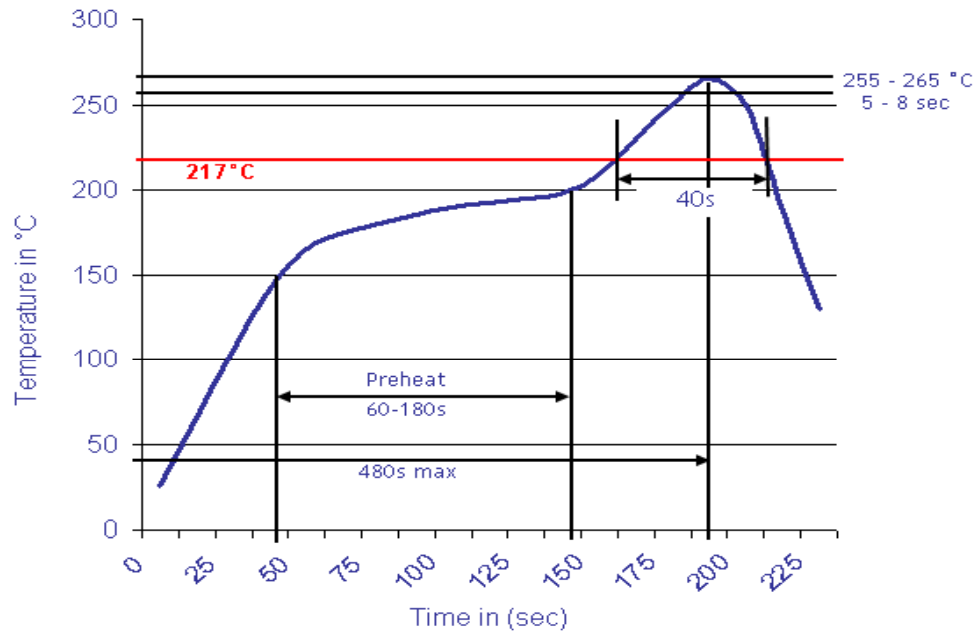

Pluggable Terminal Block / Pitch 3.81mm	
Part No.:	A14H053
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	28.03.2019
APPD:	Pete			FINISH	Mike			Sheet No.	3 from 3