


EDCON-COMPONENTS



Drawing

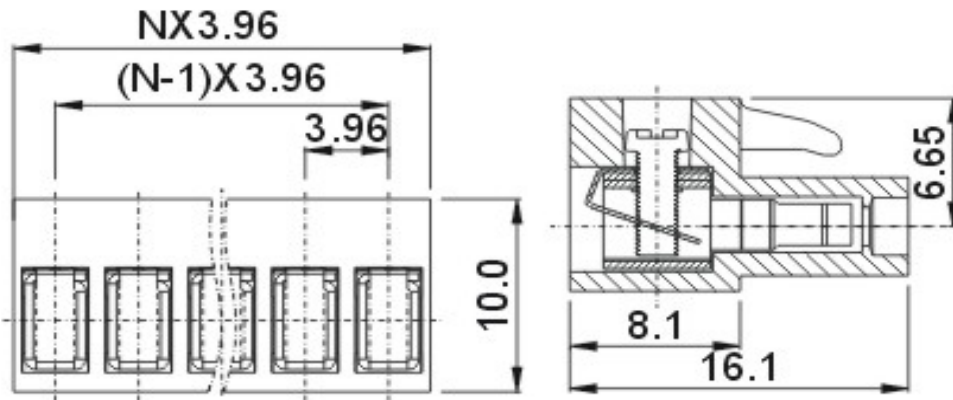

P.C.B. Layout

Specification

APPROVAL



Electrical

	UL	IEC
Standard	UL	IEC
Rated voltage	150V	250V
Rated current	8A	15A
Wire range	28-14 AWG	1.5mm ²
Withstanding voltage	AC 2000V/1min	

Mechanical

Ambient temperature	-40°C ~ +105°C
Strip length	7mm
Screw, Torque	M2, 0.2Nm (1.7Lb-In.)

Dimensions

Pitch	3.96mm
Poles	2P - 24P

Material

Housing	PA66 (UL94V-0)
Contact	Brass
Terminal screw	steel, Ni plated
Wire guard	Phosphor Bronze, Ni plated



Pluggable Terminal Block /
Pitch 3.96mm

Part No.: A14I004

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.3.2009
APPD:	Louis			FINISH	Georg		Sheet No.		1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A14I004	-	XX	XX	-	X

XX = total	WH - white
02	GN - green
...	GR - gray
24	LG - light gray
	PG - Phoenix Green
	OR - orange
	BL - blue
	BK - black



Pluggable Terminal Block /
Pitch 3.96mm

Part No.: A14I004

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.3.2009
APPD:	Louis			FINISH	Georg			Sheet No.	2 from 3

www.edcon-components.com


email: info@edcon-components.com

EDCON-COMPONENTS



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

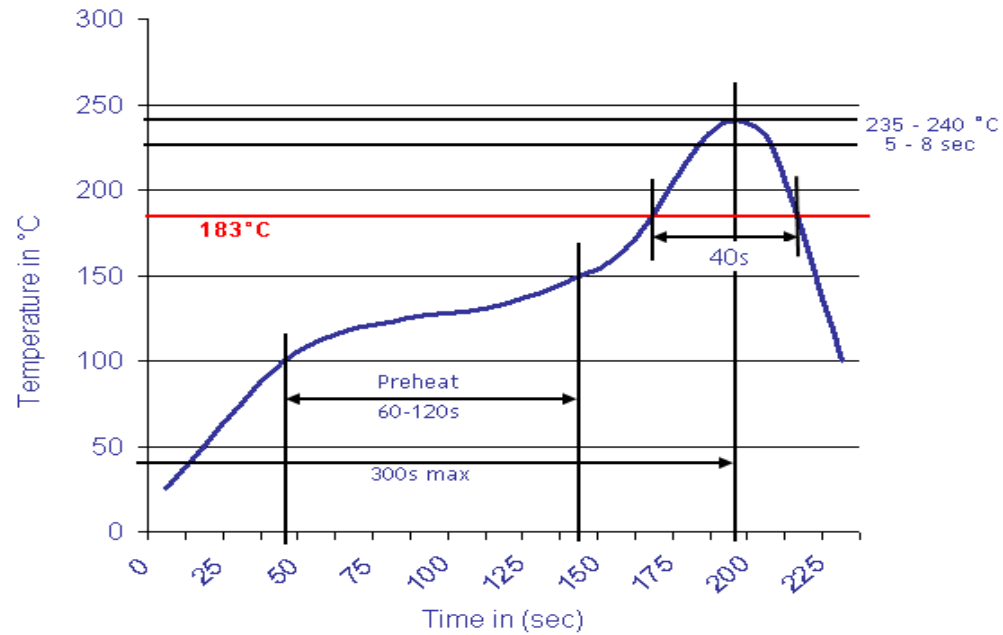

Pluggable Terminal Block / Pitch 3.96mm	
Part No.:	A14I004
Customer:	

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.3.2009
APPD:	Louis			FINISH	Georg		Sheet No.	3 from 3	