


EDCON-COMPONENTS



Drawing

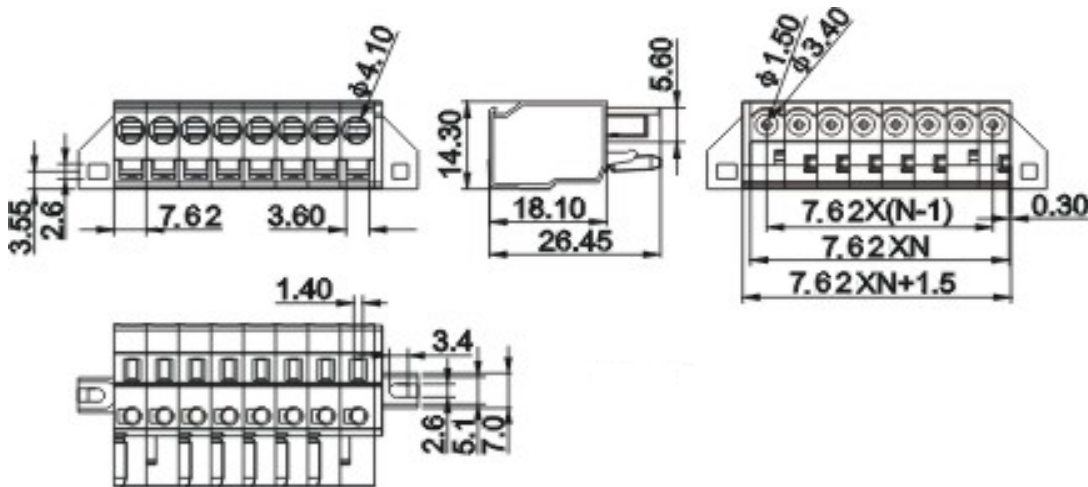

P.C.B. Layout

Specification

APPROVAL



Electrical

Standard

UL

IEC

Rated voltage

300V

320V, 400V

Rated current

15A

20A

Wire range

22-14 AWG

2.5mm²

Withstanding voltage

AC 2500V/1min

Mechanical

Ambient temperature

-40°C ~ +105°C

Strip length

8-9mm

Dimensions

Pitch

7.62mm

Poles

2P - 24P

2P - 12P

Material

Housing

PA66 (UL94V-0)

Contact

Phosphor Bronze

Wire guard

Stainless steel



Certification



Pluggable Terminal Block /
Pitch 7.62mm

Part No.: A14R014

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.3.2009
APPD:	Louis			FINISH	Georg		Sheet No.		1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A14R014	-	XX	XX	-	X

XX = total	WH - white
02	GN - green
...	GR - gray
24	LG - light gray
	PG - Phoenix Green
	OR - orange
	BL - blue
	BK - black



Certification



Pluggable Terminal Block /
Pitch 7.62mm

Part No.: A14R014

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.3.2009
APPD:	Louis			FINISH	Georg			Sheet No.	2 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)



Pluggable Terminal Block /
Pitch 7.62mm

Part No.: A14R014

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.3.2009
APPD:	Louis			FINISH	Georg		Sheet No.	3 from 3	

www.edcon-components.com

email: info@edcon-components.com