




# EDCON-COMPONENTS



## Drawing

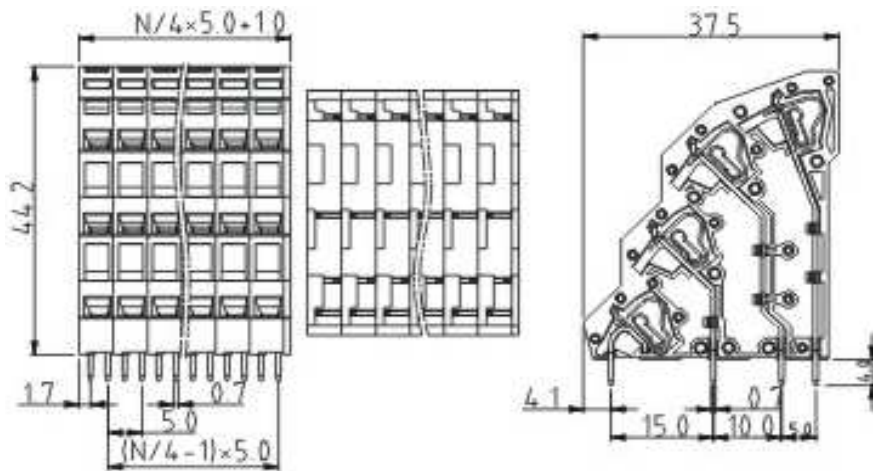

## P.C.B. Layout

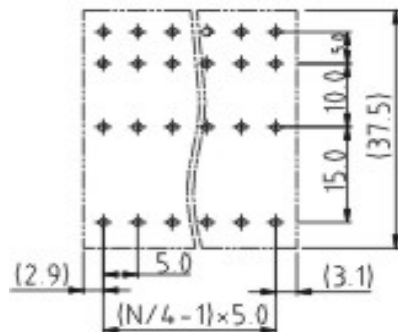

## Specifications

### APPLYING APPROVAL



#### Electrical

Standard	cULus
Rated voltage	300V
Rated current	10A
Solid / Stranded wire	28-12 AWG
Withstanding voltage	1.6KV

#### Mechanical

Wire strip length	5 ~ 6mm
Ambient temperature	-40°C ~ +115°C
Soldering temperature	250°C ±10°C/5 Sec

#### Dimensions

Pitch	5.00mm
Poles	4x (2P - 24P)

#### Material

Housing	Thermoplastic (UL94V-0)
Pin header	Brass, Tin plated
Wire guard	Stainless steel



Certification



Screwless Terminal Block /


Pitch 5.00mm

Part No.: **A11L058**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.07.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	Customer:

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)



## Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
<b>A11L058</b>	-	<b>XX</b>	<b>XX</b>	-	<b>X</b>

XX = total	<b>WH</b> - white
02	<b>GN</b> - green
...	<b>GR</b> - gray
24	<b>PG</b> - Phoenix Green
	<b>OR</b> - orange
	<b>BK</b> - black
	<b>BL</b> - blue
	<b>LG</b> - light gray




Certification



Screwless Terminal Block /  
Pitch 5.00mm


Part No.: **A11L058**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.07.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3		



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

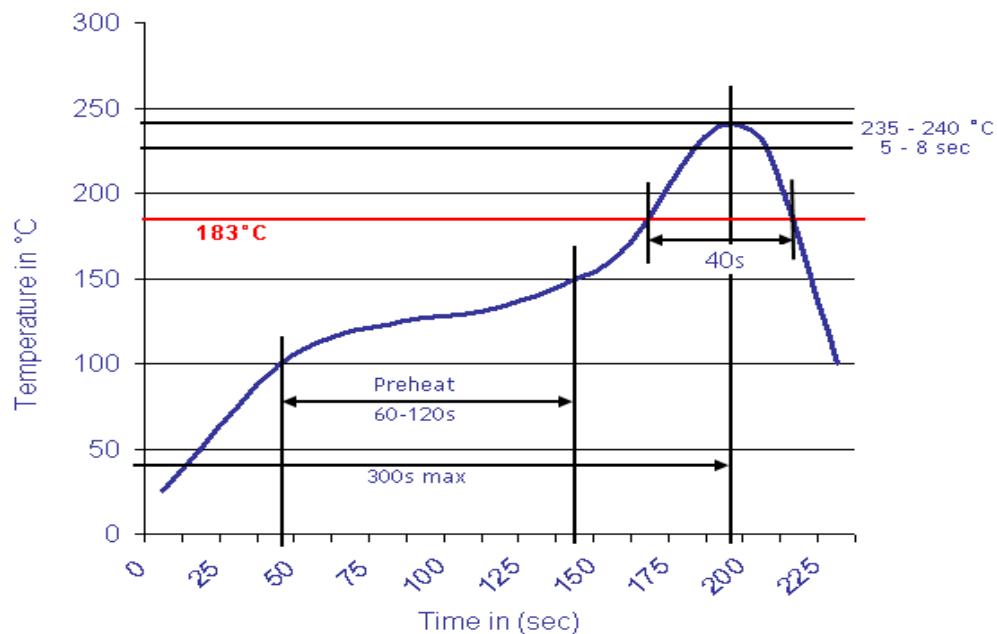

Screwless Terminal Block /

Pitch 5.00mm

Part No.: **A11L058**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.07.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3		