


EDCON-COMPONENTS



Drawing

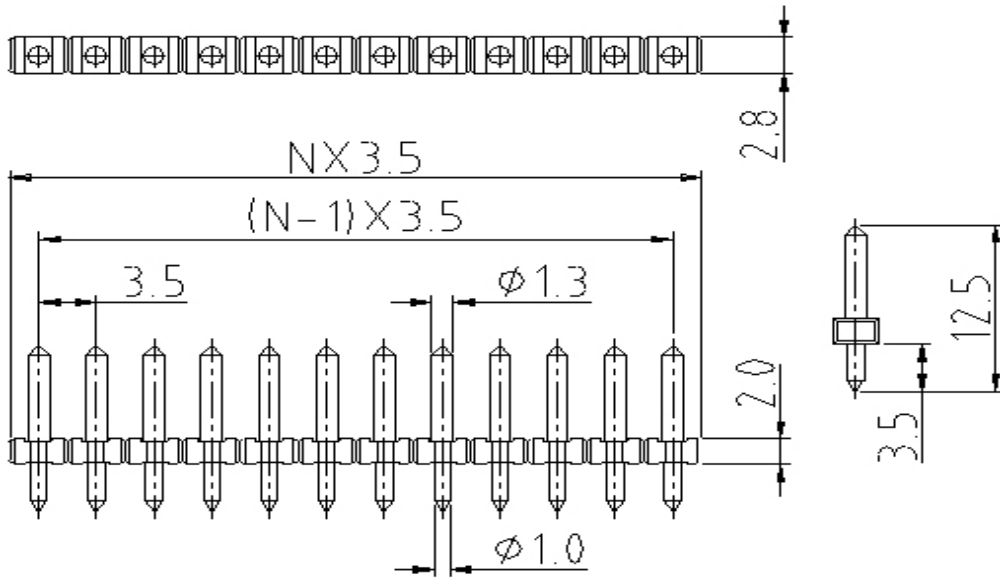

Specification

APPROVAL



Electrical

Standard
Rated voltage
Rated current
Withstanding voltage

cULus
300V
10A
1.6KV

Mechanical

Ambient temperature
Soldering temperature

-40°C ~ +115°C
250°C ± 10°C/5 sec

Dimensions

Pitch
Poles


3.50mm
2P - 24P

Material

Housing
Solid pin

Thermoplastic (UL94V-0)
Brass (CuZn)

P.C.B. Layout

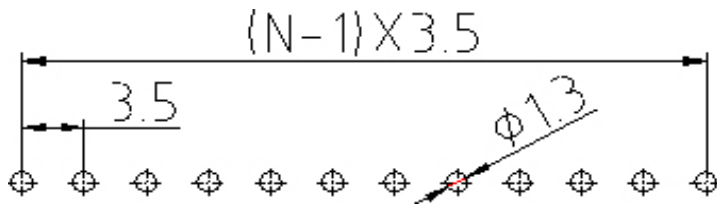

Certification



Pluggable Terminal Block /
Pitch 3.50mm

Part No.: A14G039

Customer:

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	-	No. of Pole	Body-Color	Pin length	Pin plating	-	Customer Request
-------	---	-------------	------------	------------	-------------	---	------------------

A14G039	-	XX	XX	X	X	-	X
		XX = total	WH - white	1 - 13.0mm (Up 1.3 Down 1.0)	A - Tin		
		02	GN - green		B - Gold plating		
		...	GR - gray	2 - 12.5mm(Up 1.3 Down 1.0)	C - Gold flash		
		24	TP - transparent				
		OR - orange					
		BK - black					
		BL - blue					
		RD - red					
		YW - yellow					
		PG - Phoenix Green					



Certification



Pluggable Terminal Block / Pitch 3.50mm	
Part No.:	A14G039
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	2 from 3


www.edcon-components.com

email: info@edcon-components.com



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

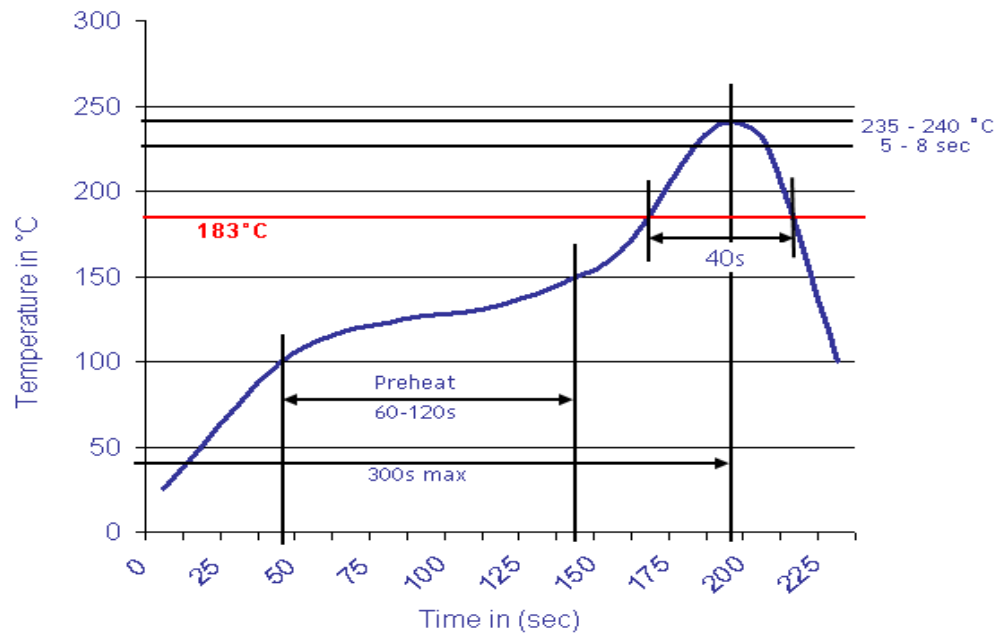

Pluggable Terminal Block / Pitch 3.50mm	
Part No.:	A14G039
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	3 from 3