



EDCON-COMPONENTS



Drawing

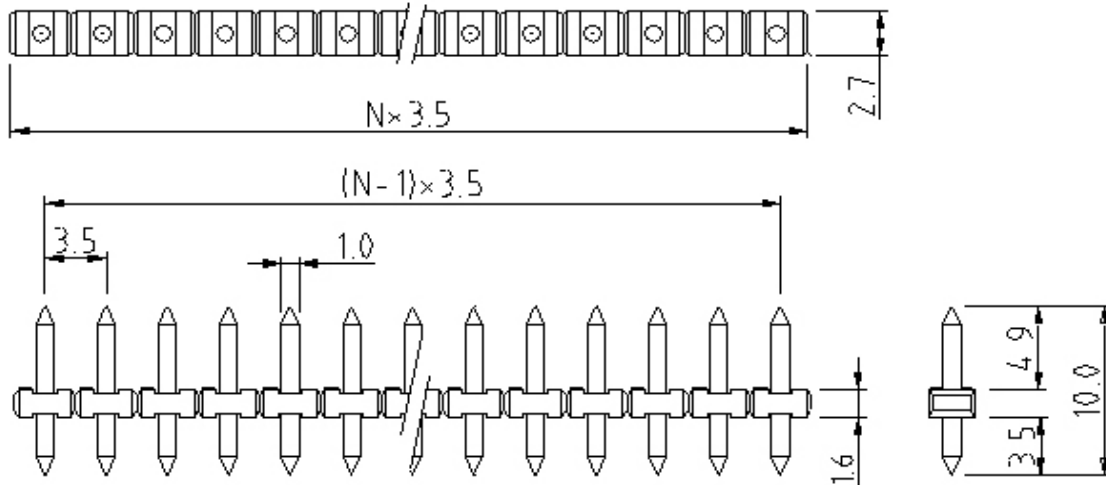

P.C.B. Layout

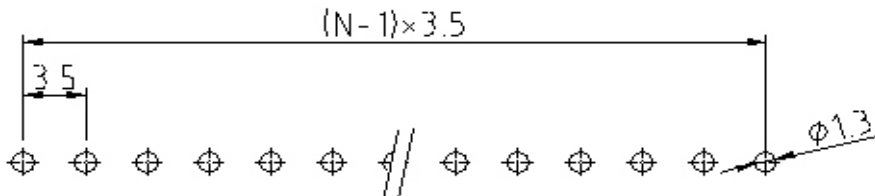

Specification

APPROVAL



Electrical

Standard
Rated voltage
Rated current
Withstanding voltage

cULus
150V
10A
1.25KV

Mechanical

Ambient temperature
Soldering temperature

-40°C ~ +120°C
250°C ± 10°C/5 sec

Dimensions

Pitch
Poles

3.50mm
2P - 24P

Material

Housing
Solid pin

Thermoplastic (UL94V-0)
Brass (CuZn)



Certification

Pluggable Terminal Block /
Pitch 3.50mm

Part No.: A14G040

Customer:

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	12.02.2015
APPD:	Pete			FINISH	Mike			Sheet No.	1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	-	No. of Pole	Body-Color	Pin length	Pin plating	-	Customer Request
-------	---	-------------	------------	------------	-------------	---	------------------

A14G040	-	XX	BK	0	A	-	X
		XX = total		0 - 10.0mm (Up 1.0 Down 1.0)	A - Tin		
		02			B - Gold plating		
		...		1 - 13.0mm (Up 1.0 Down 1.0)	C - Gold flash		
		24		2 - 12.5mm(Up 1.0 Down 1.0)			
		BK - black					



Pluggable Terminal Block / Pitch 3.50mm	
Part No.:	A14G040
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	12.02.2015
APPD:	Pete			FINISH	Mike			Sheet No.	2 from 3


www.edcon-components.com

email: info@edcon-components.com



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

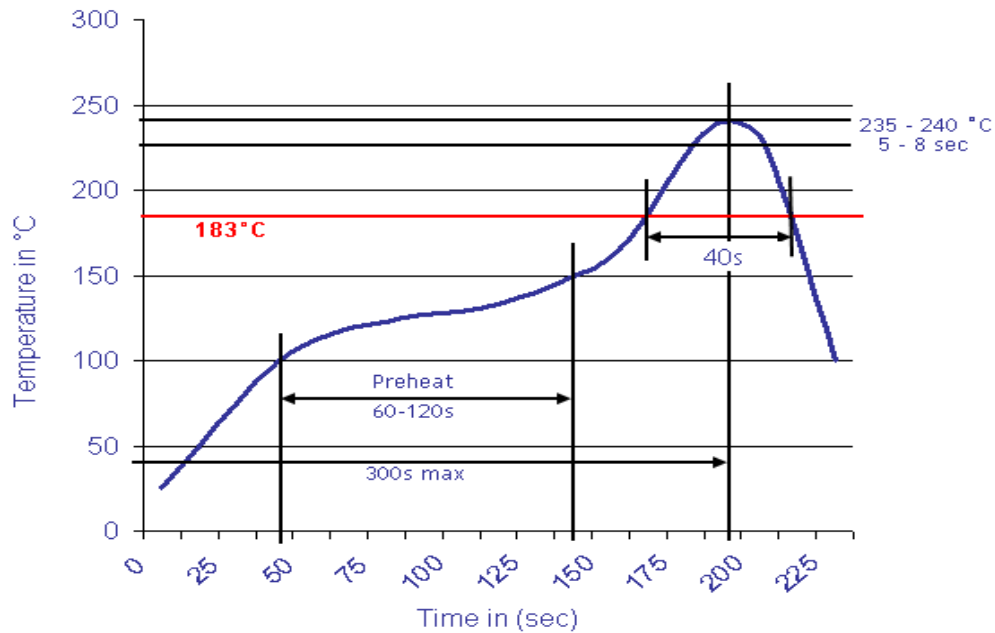

Pluggable Terminal Block / Pitch 3.50mm	
Part No.:	A14G040
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	12.02.2015
APPD:	Pete			FINISH	Mike			Sheet No.	3 from 3