


EDCON-COMPONENTS



Drawing

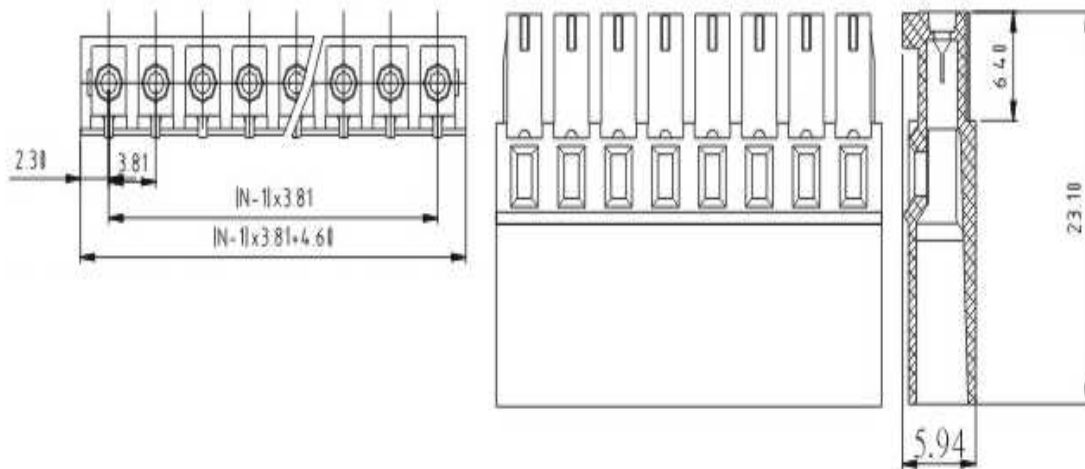

Specification

Electrical		
Standard		cULus
Rated voltage		160V
Rated current		8A
Withstanding voltage		1.32KV
Mechanical		
Ambient temperature		-40°C ~ +115°C
Soldering temperature		245°C ± 10°C/5sec.
Dimensions		
Pitch		3.81mm
Poles		2P - 24P
Material		
Housing		Polyamide (Glass filled) (UL94V-0)

P.C.B. Layout




Pluggable Terminal Block / Pitch 3.81mm	
Part No.:	A14H062
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS

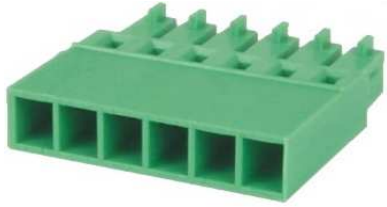

Ordering Informations

Serie	-	No. of Pole	Body-Color	Customer Request
A14H062	-	XX	XX	X
		XX = total	WH - white	
		02	GN - green	
		...	GR - gray	
		24	TP - transparent	
			OR - orange	
			BK - black	
			BL - blue	
			RD - red	
			YW - yellow	
		PG - Phoenix Green		




Pluggable Terminal Block / Pitch 3.81 mm	
Part No.:	A14H062
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	2 from 3



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

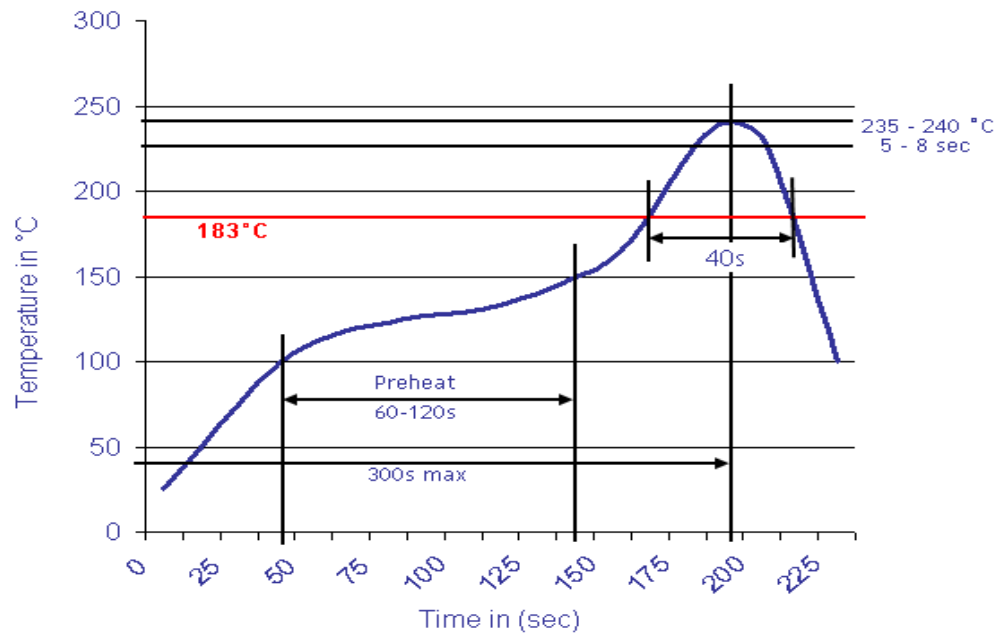

Pluggable Terminal Block / Pitch 3.81 mm	
Part No.:	A14H062
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	3 from 3