



# EDCON-COMPONENTS

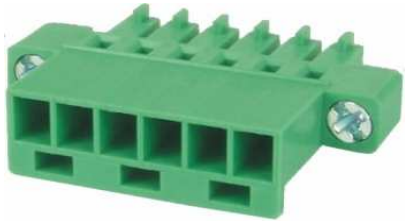

## Drawing

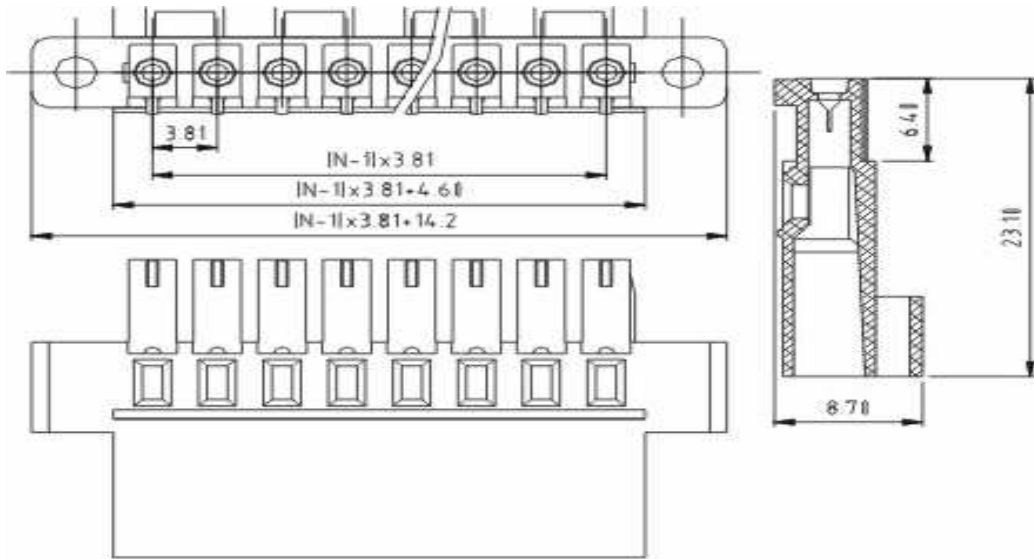

## P.C.B. Layout

## Specification

### Electrical

Standard	cULus
Rated voltage	160V
Rated current	8A
Withstanding voltage	1.32KV

### Mechanical

Ambient temperature	-40°C ~ +115°C
Soldering temperature	245°C ± 10°C/5sec.

### Dimensions

Pitch	3.81mm
Poles	2P - 24P

### Material

Housing	Polyamide (Glass filled) (UL94V-0)
---------	---------------------------------------



Pluggable Terminal Block /  
Pitch 3.81mm

Part No.: A14H065

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	1 from 3

Customer:

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)




## Ordering Informations

Serie	-	No. of Pole	Body-Color	Customer Request
<b>A14H065</b>	-	<b>XX</b>	<b>XX</b>	<b>X</b>
		XX = total	<b>WH</b> - white	
		02	<b>GN</b> - green	
		...	<b>GR</b> - gray	
		24	<b>TP</b> - transparent	
			<b>OR</b> - orange	
			<b>BK</b> - black	
			<b>BL</b> - blue	
			<b>RD</b> - red	
			<b>YW</b> - yellow	
		<b>PG</b> - Phoenix Green		




Pluggable Terminal Block / Pitch 3.81 mm	
Part No.:	A14H065
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	2 from 3

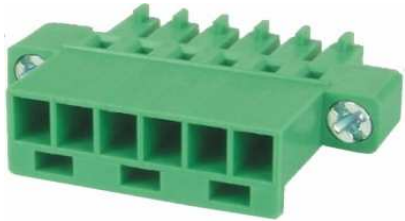

## Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

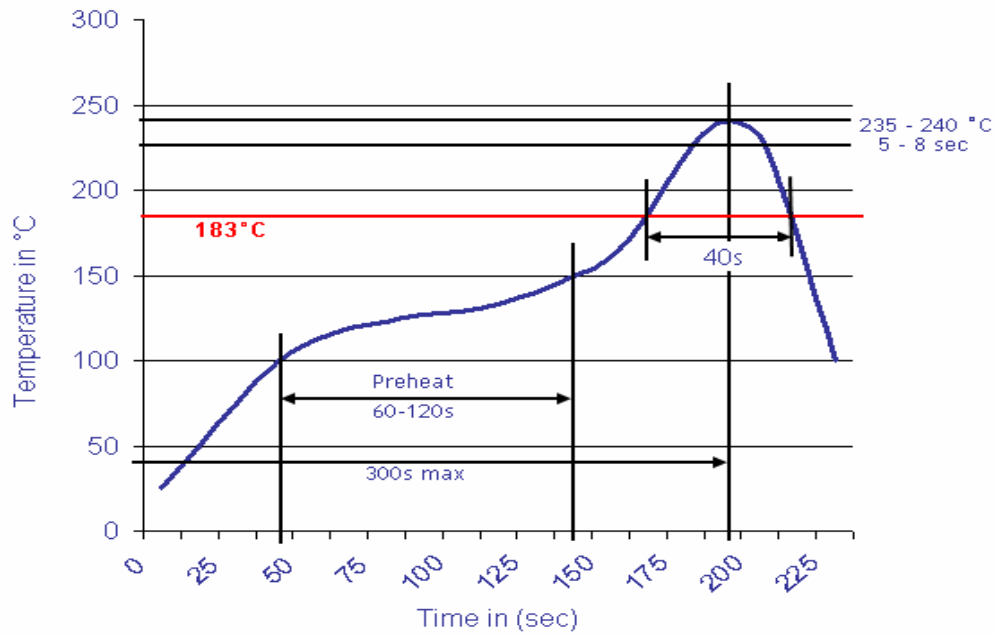

Pluggable Terminal Block / Pitch 3.81 mm	
Part No.:	A14H065
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	3 from 3