



# EDCON-COMPONENTS



## Drawing

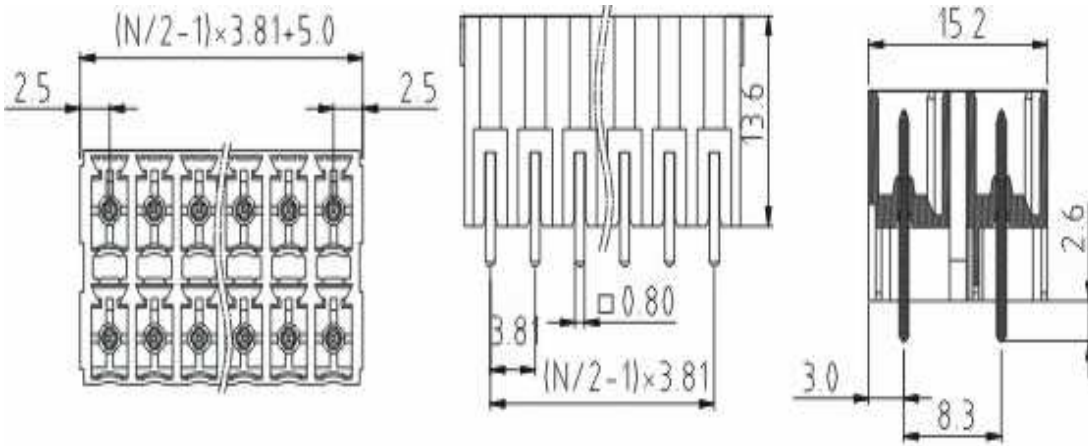

## P.C.B. Layout

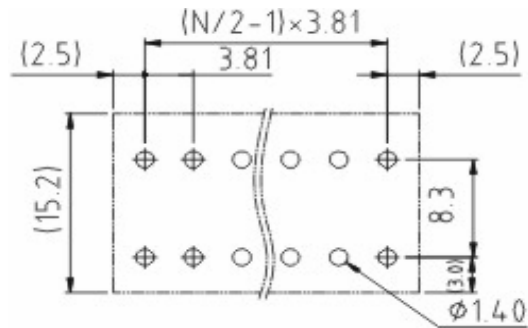

## Specification

APPLYING APPROVAL		(cULus) pending
<b>Electrical</b>		
Standard		cULus
Rated voltage		AC 160V
Rated current		5.5A
Withstanding voltage		1.32KV
<b>Mechanical</b>		
Ambient temperature		-30°C ~ +105°C
Soldering temperature		250°C ± 10°C / 5 sec
<b>Dimensions</b>		
Pitch		3.81mm
Poles		2x (2P - 24P)
<b>Material</b>		
Housing		Thermoplastic (UL94V-0)
Pin header		Brass, Tin plated



**Certification**



Pluggable Terminal Block / Pitch 3.81mm	
Part No.:	A14H074
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	1 from 3

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)

# EDCON-COMPONENTS



## Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
<b>A14H074</b>	-	<b>XX</b>	<b>XX</b>	-	<b>X</b>
		XX = total	<b>WH</b> - white		
		2 x 02	<b>GN</b> - green		
		...	<b>GR</b> - gray		
		2 x 24	<b>TP</b> - transparent		
			<b>OR</b> - orange		
			<b>BK</b> - black		
			<b>BL</b> - blue		
			<b>RD</b> - red		
			<b>YW</b> - yellow		
			<b>PG</b> - Phoenix Green		



Certification



Pluggable Terminal Block / Pitch 3.81mm	
Part No.:	A14H074
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike		Sheet No.		2 from 3


[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)



**Soldering - Profil**

Classification Reflow Profile (JEDEC J-STD-020C)

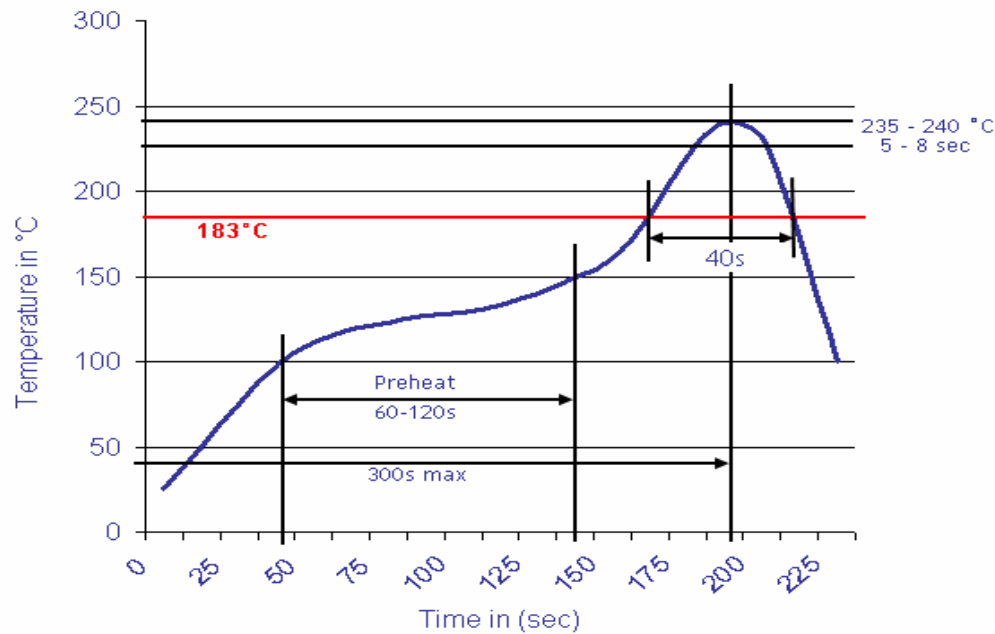

Pluggable Terminal Block / Pitch 3.81 mm	
Part No.:	A14H074
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.02.2009
APPD:	Pete			FINISH	Mike			Sheet No.	3 from 3