

Data Sheet

Pluggable Terminal Block

Pitch: 7,62 mm

Serie: A14R030

Customer Information for special Item

EDCON Customer : 0

Customer Version No. : 0

EDCON-COMPONENTS



Technical Discription

Drawing (Dimension in mm)

Electrical

Rated voltage 300V
Rated current 20A

Mechanical


Withstanding voltage 1,6kv
Temperature range -40°C ~ 115°C

Dimensions

Pitch 7,62mm
Poles 2P - 16P

Material

Housing Thermoplastic UL94V-0
Pin header PhBz Tin Plated

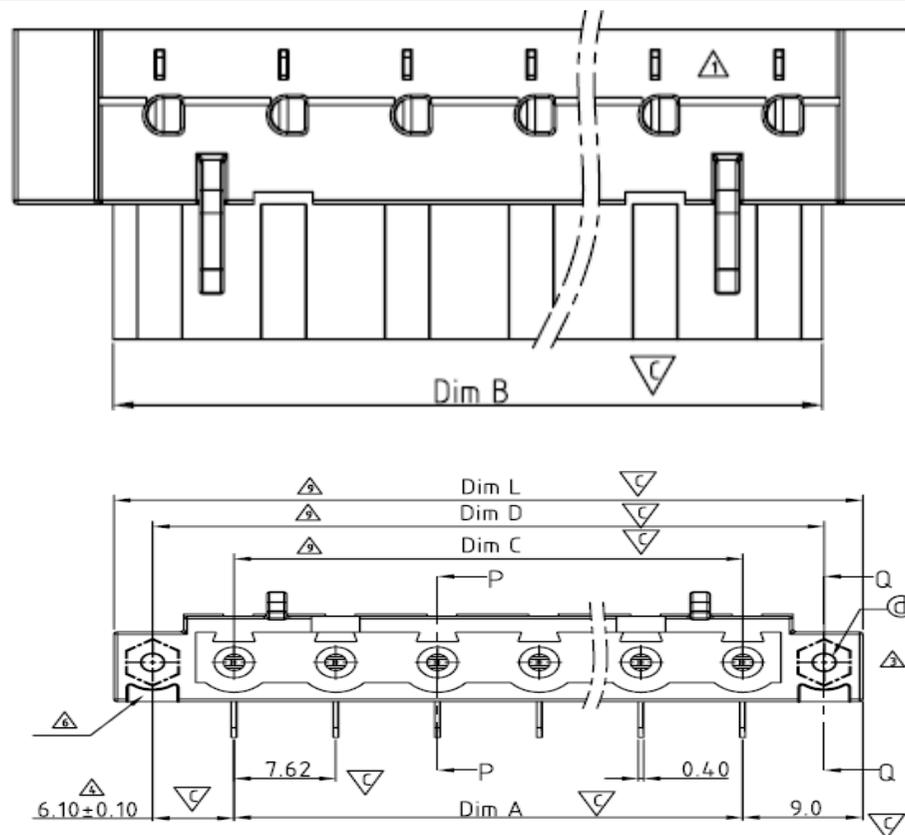

Pluggable Terminal Block

Part No.: **A14R030**

Customer:

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 17.02.2014 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | 1 from 4 | |

EDCON-COMPONENTS



Ordering Informations

| Serie | No. of Pos. | Body Color | Approval | Approval Code | ROHS | Packing | EDCON Cust. No. | Customer Version | | |
|-------|-------------|------------|----------|---------------|------|---------|-----------------|------------------|--|--|
|-------|-------------|------------|----------|---------------|------|---------|-----------------|------------------|--|--|

| | | | | | | | | | | |
|----------------|-----------|-----------|----------|----------|----------|----------|--|--|--|--|
| A14R030 | 02 | GN | N | N | R | B | | | | |
|----------------|-----------|-----------|----------|----------|----------|----------|--|--|--|--|

| Pitch | 02= Number of Pos. | GY= Gray (Standard) | N= No Approval | N= NON Approval | R= ROHS Conform | B= Standard Package | xxxxxx= Customer Number | xxx= Customer Version ??(Printing) |
|-------|--------------------|---------------------|----------------|-----------------|-----------------|---------------------|-------------------------|------------------------------------|
|-------|--------------------|---------------------|----------------|-----------------|-----------------|---------------------|-------------------------|------------------------------------|

| | | | | | | | | |
|------|---------------------|------------|--------------------------------|---|---------------------|-----------------------|--|--|
| 7,62 | Standard 2 ~ 16Pos. | | 1= Approval for Material | A= UL /UR Approval Please consult EDCON for available | N= NON ROHS Conform | I= Individual Package | | |
| | | GN= Green | 2= Approval for Terminal Block | B= VDE Approval Please consult EDCON for available | | | | |
| | | OR= Orange | | C= TÜV Approval Please consult EDCON for available | | | | |
| | | BK= Black | | | | | | |


| | |
|---------------------------------|----------------|
| Pluggable Terminal Block | |
| Part No.: | A14R030 |
| Customer: | |

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 17.02.2014 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 3 from 4 |



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

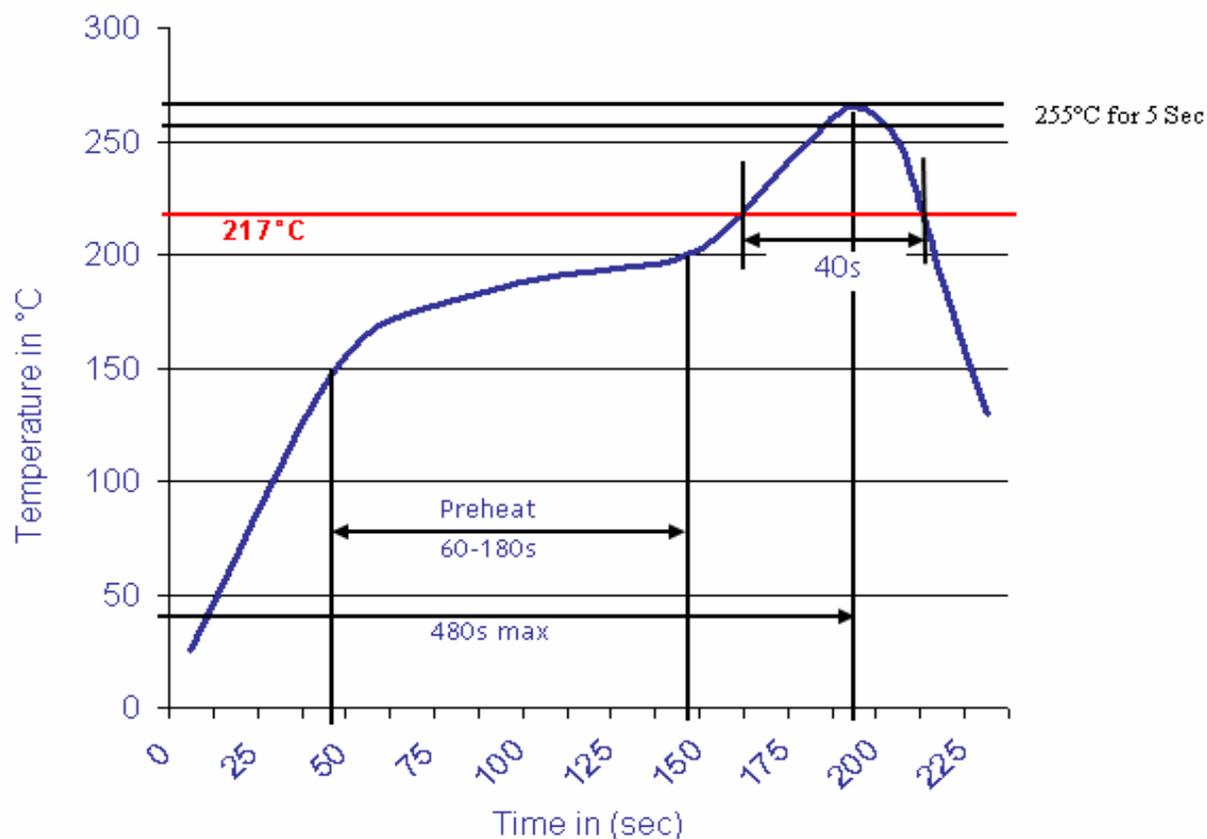

Pluggable Terminal Block

Part No.: **A14R030**

Customer:

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 17.02.2014 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | 4 from 4 | |

