



# DATA SHEET

## Metallized Polyester Film Capacitor BOX-Type

### Serie: I18013

Width (mm)	<b>13,0</b>	Range <b>473= 0,047µf</b>
Height (mm)	<b>9,0</b>	Voltage <b>401= 400VDC</b>
Thickness (mm)	<b>4,0</b>	
Pitch (mm)	<b>10,0</b>	

**Metallized Polyester Film  
Capacitor BOX-Type**

Serie No.: **I18013**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.04.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

# EDCON-COMPONENTS



## Applications

By-passing, blocking, coupling, decoupling  
 Pulse, logic, timing, oscillator circuits  
 Interference suppression in low voltage application (i.e.automotive)

## Features

High reliability  
 Metallized polyester Film,  
 Non inductive winding construction  
 Plastic Case (UL94V-0) epoxy resin


## Specifications

Reference Standard	GB/T 7332 (IEC 60384-2)		
Climatic Category	55/105/56		
Rated Voltage	85°C		
Operating Temperature	-55°C ~ 105°C (+85°C ~ +105°C: decreaing factor 1,25% per °C for Vr(dc))		
Rated Voltage	63V, 100V, 160V, 250V, 400V, 630V,		
Capacitance Range	0,00033μF~ 33,0μF		
Capacitance Tolerance	± 5%(J) , ±10%(K), ±20%(M)		
Voltage Proof	1,6Ur (5s)		
Dissipation Factor	Frequency	Cr ≤ 0,1μF	Cr ≤ 0,1μF
	1KHz	≤ 1,0%	≤ 1,0%
	10KHz	≤ 1,5%	≤ 1,5%
	100KHz	≤ 3,0%	

Insulation Resistance	Ur > 100V	≥30000MΩ, CR≤0,33μF ≥10000s, CR≥0,33μF				
	Ur ≤ 100V	≥15000MΩ, CR≤0,33μF (20°C,100V,1min.) ≥5000s, CR≥0,33μF (20°C,10V,1min.)				

Maximum Pulse Rise Time (dV/dt): If the working voltage (U) is lower than the rated voltage (Ur), the capacitor can be worked at a higher dV/dt. In this case, the maximum allowed dV/dt is obtain by multiplying the right value with Ur/U.	Ur(V)	dV/dt (V/μs)				
	Pitch	7,5	10,0	15,0	22,5	27,5
	63	7,5	6	3	2	1
	100	15	9	5	3	2
	250	30	20	12	8	5
	400	40	30	20	10	7
630	50	40	25	12	--	

## Dimensions ( mm )

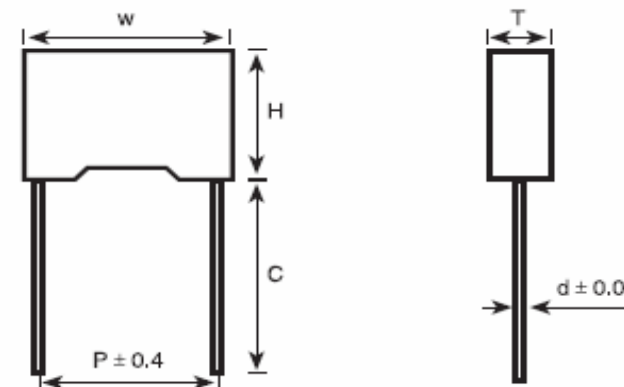

Case Size	A
W= ±0,4	13,0
H= ±0,4	9,0
T= ±0,4	4,0
P= ±0,4	10,0

<b>Metallized Polyester Film Capacitor BOX-Type</b>	
Part No.:	<b>I18013</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.04.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 4

# EDCON-COMPONENTS



## Ordering Informations

Serie	Range	Tolerance	Voltage	Case Size Code	Lead Length	Special function	ROHS	Packing Code		
-------	-------	-----------	---------	----------------	-------------	------------------	------	--------------	--	--

<b>I18013</b>	<b>473</b>	<b>M</b>	<b>401</b>	<b>A</b>	<b>LL</b>	<b>N</b>	<b>R</b>	<b>BU</b>		
---------------	------------	----------	------------	----------	-----------	----------	----------	-----------	--	--

<b>473= 0,047µf</b>	<b>M= 20%</b>	<b>401= 400VDC</b>	<b>A= Look Size Dimension</b>	<b>LL= Long Lead</b>	<b>N= No function</b>	<b>R= ROHS Conform</b>	<b>BU= Bulk Ware</b>
	<b>K= 10%</b>			<b>L4= ca. 3,50mm</b>		<b>N= NON ROHS Conform</b>	<b>TA= Tape Ammo Pack</b>
	<b>J= 10%</b>					<b>TR= Tape Reel</b>	

<b>Metallized Polyester Film Capacitor BOX-Type</b>	
Part No.:	<b>I18013</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.04.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



<b>Metallized Polyester Film Capacitor BOX-Type</b>	
Part No.:	<b>I18013</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.04.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	