



# DATA SHEET

## Metallized Polyester Film Capacitor BOX-Type

### Serie: I18014

Width (mm)	<b>17,5</b>	Range 155= 1,5 $\mu$ f
Height (mm)	<b>14,5</b>	Voltage 251= 250VDC
Thickness (mm)	<b>8,5</b>	
Pitch (mm)	<b>15,0</b>	

**Metallized Polyester Film  
Capacitor BOX-Type**

Serie No.: **I18014**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.04.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

# EDCON-COMPONENTS



## Applications

By-passing, blocking, coupling, decoupling  
 Pulse, logic, timing, oscillator circuits  
 Interference suppression in low voltage application (i.e.automotive)

## Features

High reliability  
 Metallized polyester Film,  
 Non inductive winding construction  
 Plastic Case (UL94V-0) epoxy resin

## Specifications


Reference Standard	GB/T 7332 (IEC 60384-2)		
Climatic Category	55/105/56		
Rated Voltage	85°C		
Operating Temperature	-55°C ~ 105°C (+85°C ~ +105°C: decreaing factor 1,25% per °C for Vr(dc))		
Rated Voltage	63V, 100V, 160V, 250V, 400V, 630V,		
Capacitance Range	0,00033μF~ 33,0μF		
Capacitance Tolerance	± 5%(J) , ±10%(K), ±20%(M)		
Voltage Proof	1,6Ur (5s)		
Dissipation Factor	Frequency	Cr ≤ 0,1μF	Cr ≤ 0,1μF
	1KHz	≤ 1,0%	≤ 1,0%
	10KHz	≤ 1,5%	≤ 1,5%
	100KHz	≤ 3,0%	

Insulation Resistance	Ur > 100V	≥30000MΩ, CR≤0,33μF ≥10000s, CR≥0,33μF				
	Ur ≤ 100V	≥15000MΩ, CR≤0,33μF (20°C,100V,1min.) ≥5000s, CR≥0,33μF (20°C,10V,1min.)				

Maximum Pulse Rise Time (dV/dt): If the working voltage (U) is lower than the rated voltage (Ur), the capacitor can be worked at a higher dV/dt. In this case, the maximum allowed dV/dt is obtain by multiplying the right value with Ur/U.

Ur(V)	dV/dt (V/μs)					
Pitch	7,5	10,0	15,0	22,5	27,5	
63	7,5	6	3	2	1	
100	15	9	5	3	2	
250	30	20	12	8	5	
400	40	30	20	10	7	
630	50	40	25	12	--	

## Dimensions ( mm )

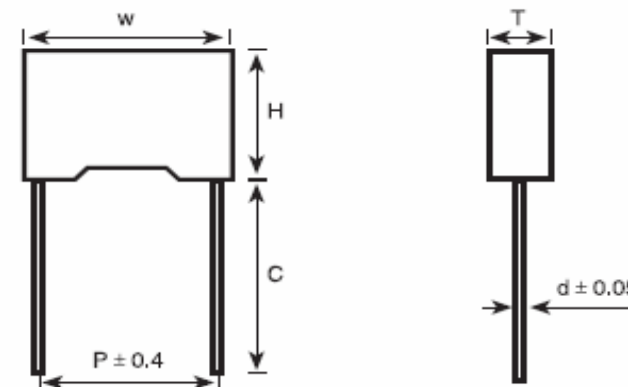

Case Size	A
W= ±0,4	17,5
H= ±0,4	14,5
T= ±0,4	8,5
P= ±0,4	15,0

**Metallized Polyester Film  
 Capacitor BOX-Type**

Part No.: **I18014**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.04.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 4

Customer:  
 email: info@edcon-components.com

[www.edcon-components.com](http://www.edcon-components.com)

# EDCON-COMPONENTS



## Ordering Informations

Serie	Range	Tolerance	Voltage	Case Size Code	Lead Length	Special function	ROHS	Packing Code		
-------	-------	-----------	---------	----------------	-------------	------------------	------	--------------	--	--

<b>I18014</b>	<b>155</b>	<b>M</b>	<b>251</b>	<b>A</b>	<b>LL</b>	<b>N</b>	<b>R</b>	<b>BU</b>		
---------------	------------	----------	------------	----------	-----------	----------	----------	-----------	--	--

<b>155=</b> 1,5µf	<b>M=</b> 20%	<b>251=</b> 250VDC	<b>A=</b> Look Size Dimension	<b>LL=</b> Long Lead	<b>N=</b> No function	<b>R=</b> ROHS Conform	<b>BU=</b> Bulk Ware
	<b>K=</b> 10%			<b>L4=</b> ca. 3,50mm		<b>N=</b> NON ROHS Conform	<b>TA=</b> Tape Ammo Pack
	<b>J=</b> 10%						<b>TR=</b> Tape Reel

<b>Metallized Polyester Film Capacitor BOX-Type</b>	
Part No.:	<b>I18014</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.04.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



<b>Metallized Polyester Film Capacitor BOX-Type</b>	
Part No.:	<b>I18014</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.04.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	