



# DATA SHEET

## Metallized Polyester Film Capacitor BOX-Type

### Serie: I18015

Width (mm)	<b>26,5</b>	Range <b>335= 3,3<math>\mu</math>f</b>
Height (mm)	<b>16,0</b>	Voltage <b>630= 63VDC</b>
Thickness (mm)	<b>7,0</b>	
Pitch (mm)	<b>22,5</b>	

**Metallized Polyester Film  
Capacitor BOX-Type**

Serie No.: **I18015**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.04.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

# EDCON-COMPONENTS



## Applications

By-passing, blocking, coupling, decoupling  
 Pulse, logic, timing, oscillator circuits  
 Interference suppression in low voltage application (i.e. automotive)

## Specifications

Reference Standard	GB/T 7332 (IEC 60384-2)		
Climatic Category	55/105/56		
Rated Voltage	85°C		
Operating Temperature	-55°C ~ 105°C (+85°C ~ +105°C: decreasing factor 1,25% per °C for Vr(dc))		
Rated Voltage	63V, 100V, 160V, 250V, 400V, 630V,		
Capacitance Range	0,00033µF~ 33,0µF		
Capacitance Tolerance	± 5%(J) , ±10%(K), ±20%(M)		
Voltage Proof	1,6Ur (5s)		
Dissipation Factor	Frequency	Cr ≤ 0,1µF	Cr ≤ 0,1µF
	1KHz	≤ 1,0%	≤ 1,0%
	10KHz	≤ 1,5%	≤ 1,5%
	100KHz	≤ 3,0%	

Insulation Resistance	Ur > 100V	≥30000MΩ, CR≤0,33µF ≥10000s, CR≥0,33µF				
	Ur ≤ 100V	≥15000MΩ, CR≤0,33µF (20°C,100V,1min.) ≥5000s, CR≥0,33µF (20°C,10V,1min.)				


Maximum Pulse Rise Time (dV/dt): If the working voltage (U) is lower than the rated voltage (Ur), the capacitor can be worked at a higher dV/dt. In this case, the maximum allowed dV/dt is obtain by multiplying the right value with Ur/U.	Ur(V)	dV/dt (V/µs)				
	Pitch	7,5	10,0	15,0	22,5	27,5
	63	7,5	6	3	2	1
	100	15	9	5	3	2
	250	30	20	12	8	5
	400	40	30	20	10	7
630	50	40	25	12	--	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.04.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 4

## Features

High reliability  
 Metallized polyester Film,  
 Non inductive winding construction  
 Plastic Case (UL94V-0) epoxy resin

## Dimensions ( mm )

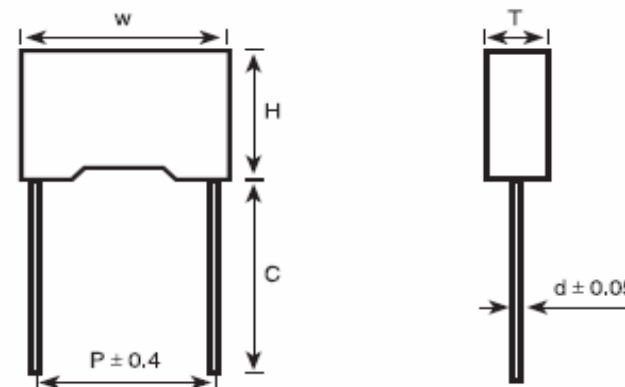

Case Size	A
W= ±0,4	26,5
H= ±0,4	16,0
T= ±0,4	7,0
P= ±0,4	22,5

<b>Metallized Polyester Film Capacitor BOX-Type</b>	
Part No.:	<b>I18015</b>
Customer:	

# EDCON-COMPONENTS



## Ordering Informations

Serie	Range	Tolerance	Voltage	Case Size Code	Lead Length	Special function	ROHS	Packing Code		
-------	-------	-----------	---------	----------------	-------------	------------------	------	--------------	--	--

<b>I18015</b>	<b>335</b>	<b>M</b>	<b>630</b>	<b>A</b>	<b>LL</b>	<b>N</b>	<b>R</b>	<b>BU</b>		
---------------	------------	----------	------------	----------	-----------	----------	----------	-----------	--	--

<b>335=</b> 3,3µf	<b>M=</b> 20%	<b>630=</b> 63VDC	<b>A=</b> Look Size Dimension	<b>LL=</b> Long Lead	<b>N=</b> No function	<b>R=</b> ROHS Conform	<b>BU=</b> Bulk Ware
	<b>K=</b> 10%			<b>L4=</b> ca. 3,50mm		<b>N=</b> NON ROHS Conform	<b>TA=</b> Tape Ammo Pack
	<b>J=</b> 10%						<b>TR=</b> Tape Reel


<b>Metallized Polyester Film Capacitor BOX-Type</b>	
Part No.:	<b>I18015</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.04.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

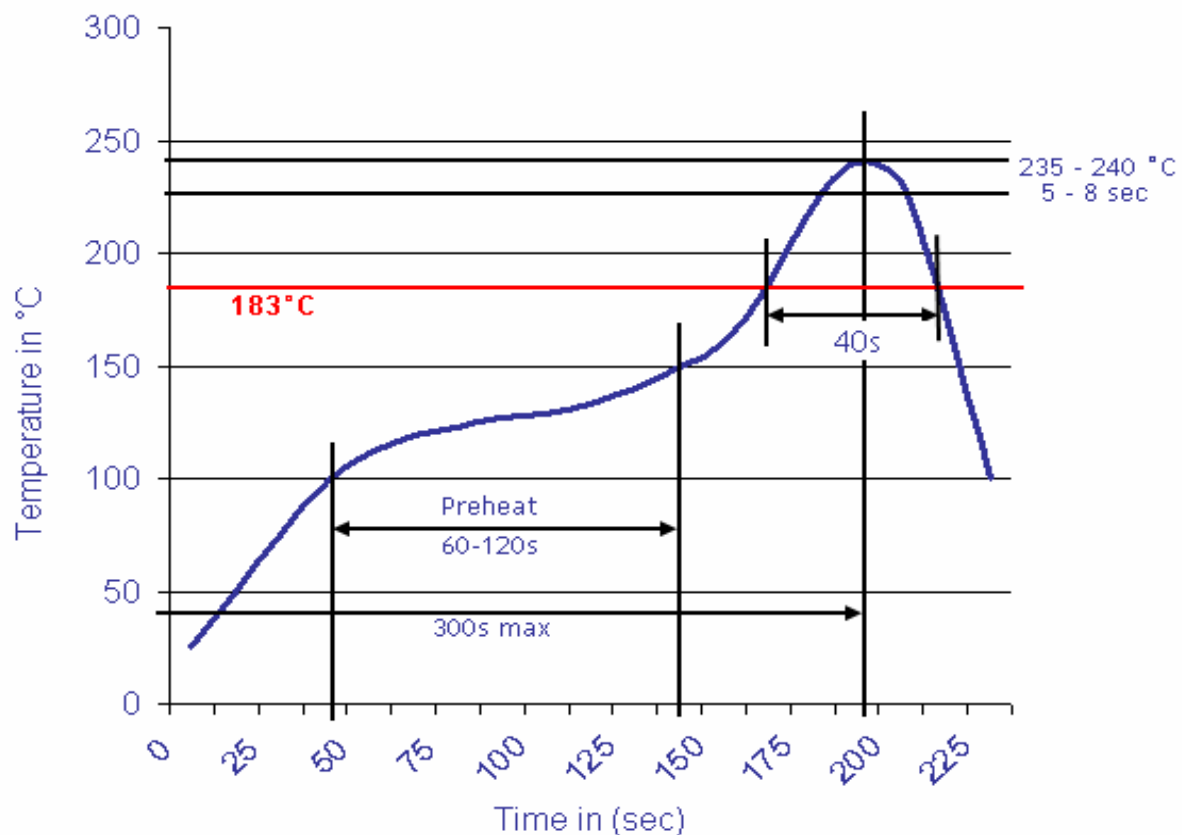

<b>Metallized Polyester Film Capacitor BOX-Type</b>	
Part No.:	<b>I18015</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.04.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	