




Material



Material: Nickel plated Brass
 Protection degree: Using suitable O-Sealings within the clamping range the protection degree can reach IP68
 Properties: succeed in the experiment of IEC-60077-1999 resistance to vibration and impact.
 Temperature Range: Stat.: Min -40°C to Max. 100°C Short-term 120°C
 Dyn.: Min -20°C to Max. 80°C Short-term 120°C
 Note: According to customer demand for custom ROHS through the joint certification of products.

Technical Drawing

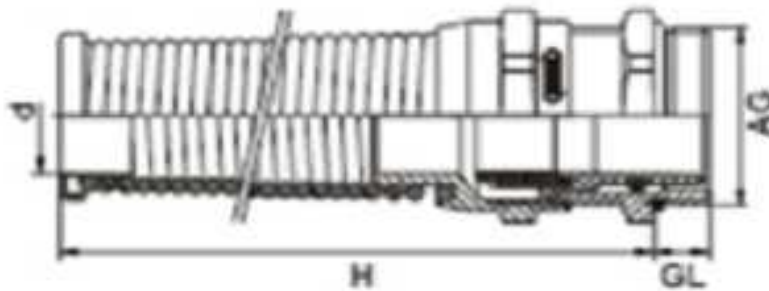

Protection Metal Cable Gland	
Part No.:	231013
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	06.06.2007
APPD:	Join			FINISH	Shieh	Sheet	1 from 2

Copyright by EDCON-COMPONENTS H.Schmitt 20.6.2008



Dimension Table

Size	Thread Dimension	Clamping Range (mm)	Thread AG (mm)	Thread Length (mm)	Wrench Size (mm)	Total Length (mm)
P7	PG7	3~6,5	12	8	15	54
P9	PG9	4~8	15,2	8	19	63
P11	PG11	5~10	18,6	8	22	78
P13	PG13,5	6~12	20,4	9	24	90
P16	PG16	10~14	22,5	10	27	100
P21	PG21	13~18	28,3	11	33	114

Ordering Information

Serie	Size	ROHS	Packing		
231013	P7	R	B1		

Look dimension table	R= ROHS Conform	B1= 100PCS in one Poly Bag
	0= NON ROHS	

Protection Metal Cable Gland	
Part No.:	231013
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	06.06.2007
APPD:	Join			FINISH	Shieh	Sheet	2 from 2