


EDCON-COMPONENTS



Description

Material: Brass
 Plating: Tin-Plated
 Housing Material: PA66 + 10% GF, UL94V-0
 Number of Poles: 1 ~ 25
 Rated Voltage: UL300V
 IEC 400V
 Rated Current: UL=25A
 IEC=30A
 Withstanding Voltage: AC 2000V/1Min.
 Temperatur Range: -40°C ~ +105°C

Dimensions (mm)

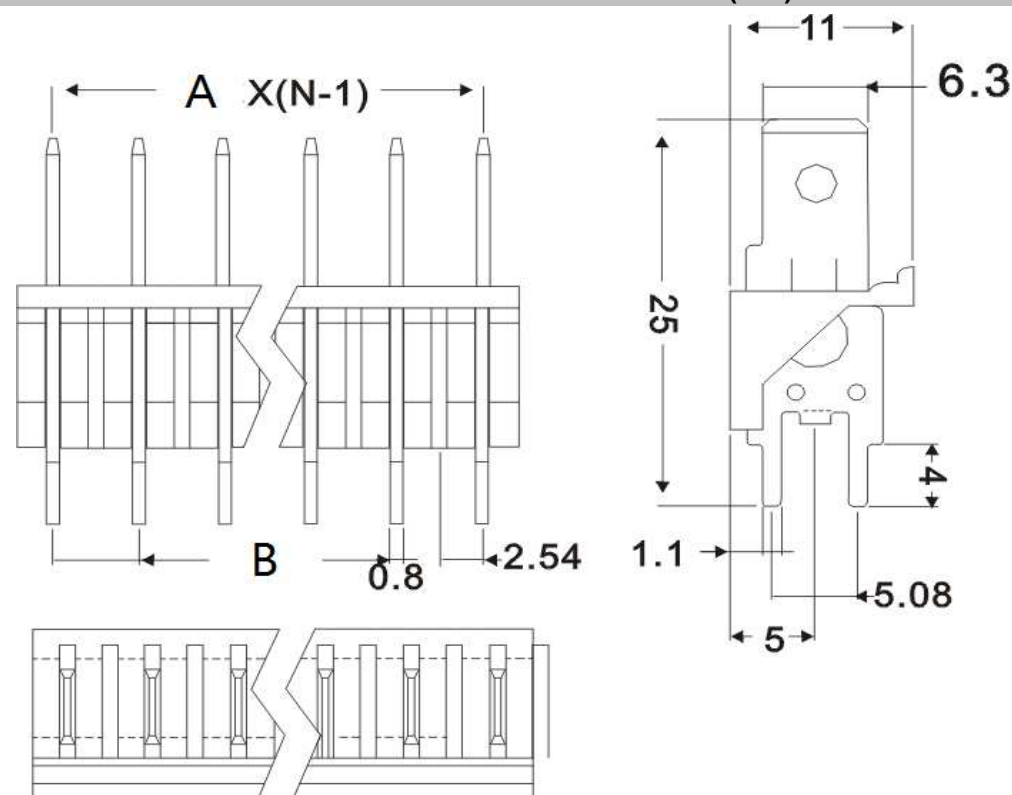

A= 5,08mm
 B= 5,08mm

**Flat-Terminal 6,3mm with
 Body pitch 5,08mm**

Part No.: **N40043**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.08.2016	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3		

EDCON-COMPONENTS



Ordering Informations

Serie	No of Position	Body Colour	special function	ROHS	Packing					
-------	----------------	-------------	------------------	------	---------	--	--	--	--	--

N40043	02	BK	N	R	BU					
---------------	-----------	-----------	----------	----------	-----------	--	--	--	--	--

02 = 2Pos.	BK= Black Body	N= No Special function	R= ROHS Conform	BU= Bulk-Ware		
02 ~ 25Pos.			N= NON ROHS Conform			

**Flat-Terminal 6,3mm with
Body pitch 5,08mm**

Part No.: **N40043**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.08.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3

Customer:


www.edcon-components.com

email: info@edcon-components.com



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

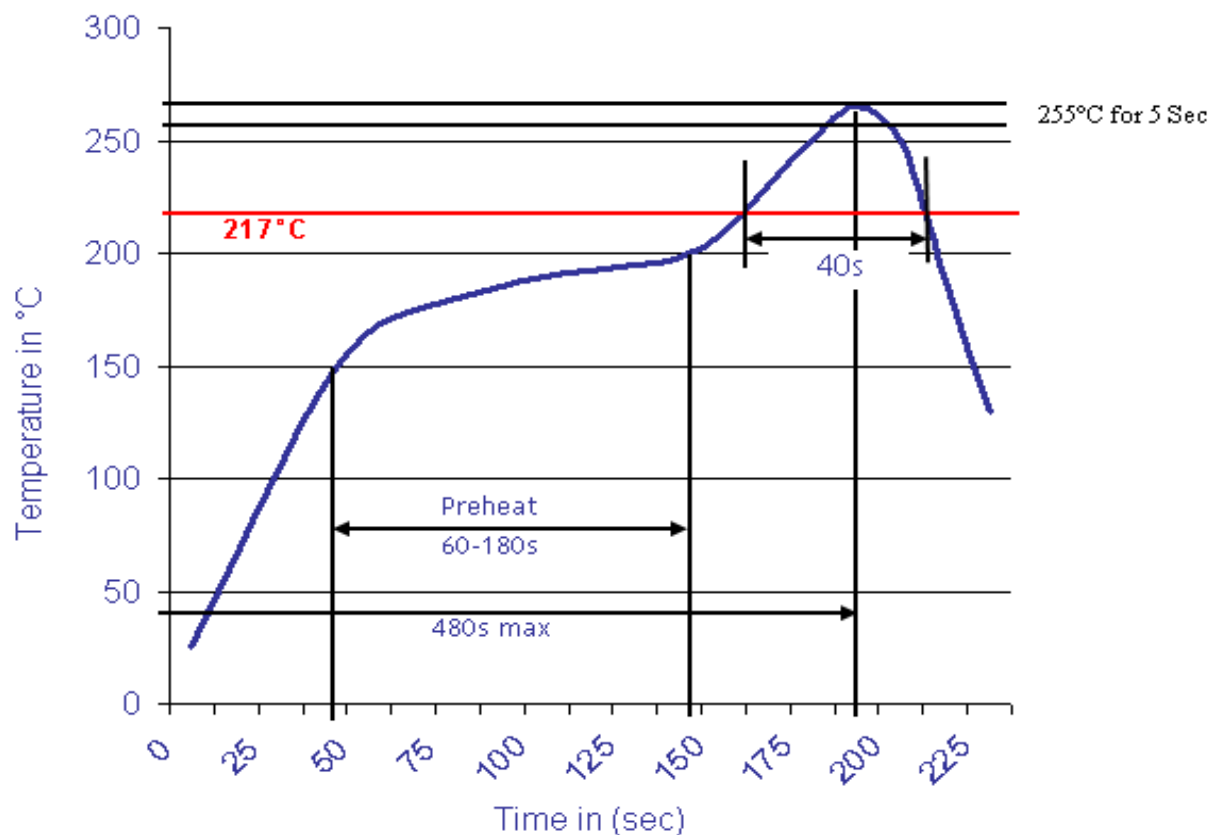

Flat-Terminal 6,3mm with Body pitch 5,08mm

Part No.: **N40043**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.08.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	