


# EDCON-COMPONENTS



## Description

**Material:** Brass  
**Plating:** Tin-Plated  
**Housing Material:** PA66 + 10% GF, UL94V-0  
**Number of Poles:** 1 ~ 25  
**Rated Voltage:** UL300V  
IEC 400V  
**Rated Current:** UL=25A  
IEC=30A  
**Withstanding Voltage:** AC 2000V/1Min.  
**Temperatur Range:** -40°C ~ +105°C

## Dimensions (mm)

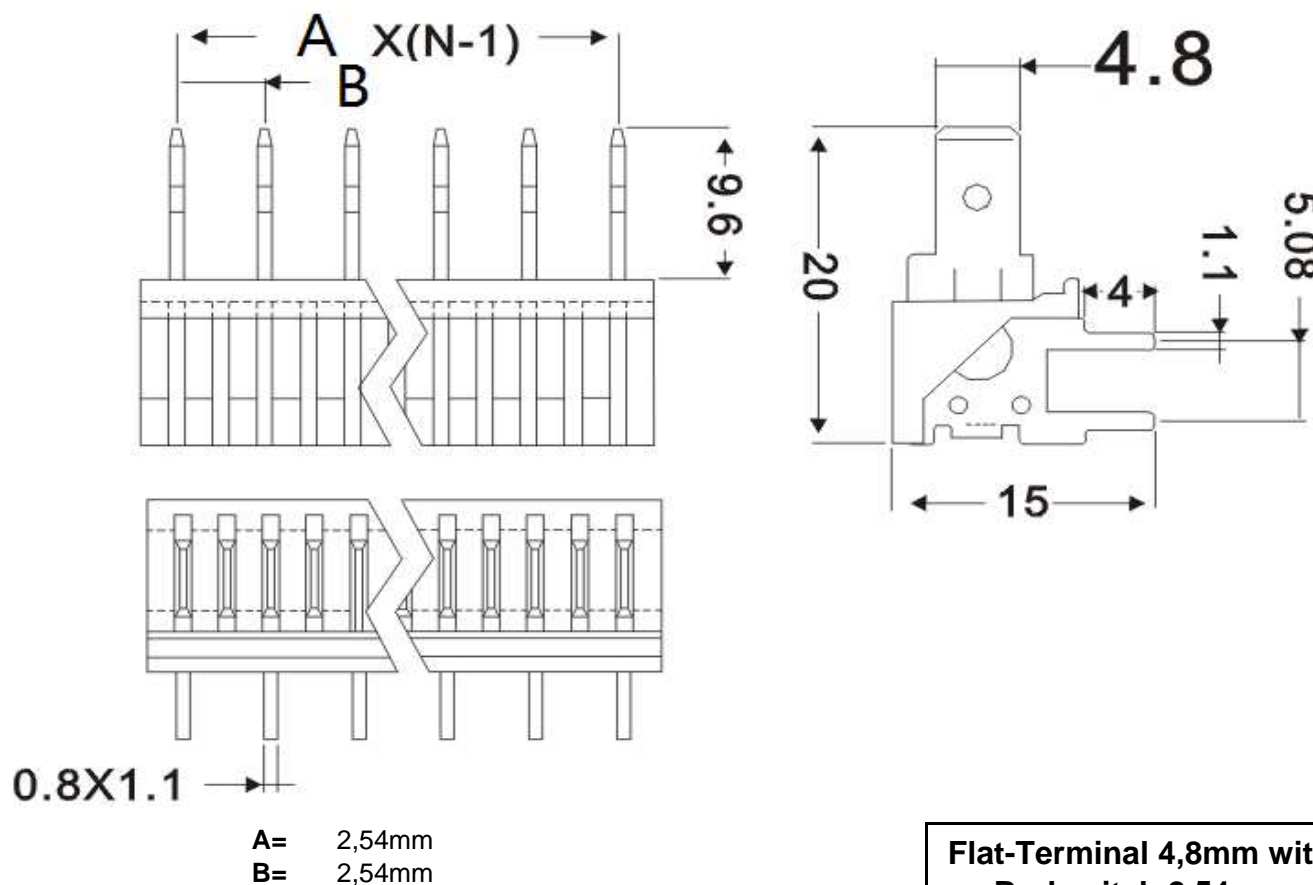

**Flat-Terminal 4,8mm with Body pitch 2,54mm**

Part No.: **N40051**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.08.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	Customer:

# EDCON-COMPONENTS



## Ordering Informations

Serie	No of Position	Body Colour	special function	ROHS	Packing					
-------	----------------	-------------	------------------	------	---------	--	--	--	--	--

<b>N40051</b>	<b>02</b>	<b>BK</b>	<b>N</b>	<b>R</b>	<b>BU</b>					
---------------	-----------	-----------	----------	----------	-----------	--	--	--	--	--

<b>02 = 2Pos.</b>	<b>BK= Black Body</b>	<b>N= No Special function</b>	<b>R= ROHS Conform</b>	<b>BU= Bulk-Ware</b>		
<b>02 ~ 25Pos.</b>			<b>N= NON ROHS Conform</b>			

**Flat-Terminal 4,8mm with  
Body pitch 2,54mm**

Part No.: **N40051**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.08.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



<b>Flat-Terminal 4,8mm with Body pitch 2,54mm</b>	
Part No.:	<b>N40051</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.08.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	