


EDCON-COMPONENTS



Description

Material: Brass
Plating: Tin-Plated
Housing Material: PA66 + 10% GF, UL94V-0
Number of Poles: 1 ~ 25
Rated Voltage: UL300V
IEC 400V
Rated Current: UL=25A
IEC=30A
Withstanding Voltage: AC 2000V/1Min.
Temperatur Range: -40°C ~ +105°C

Dimensions (mm)

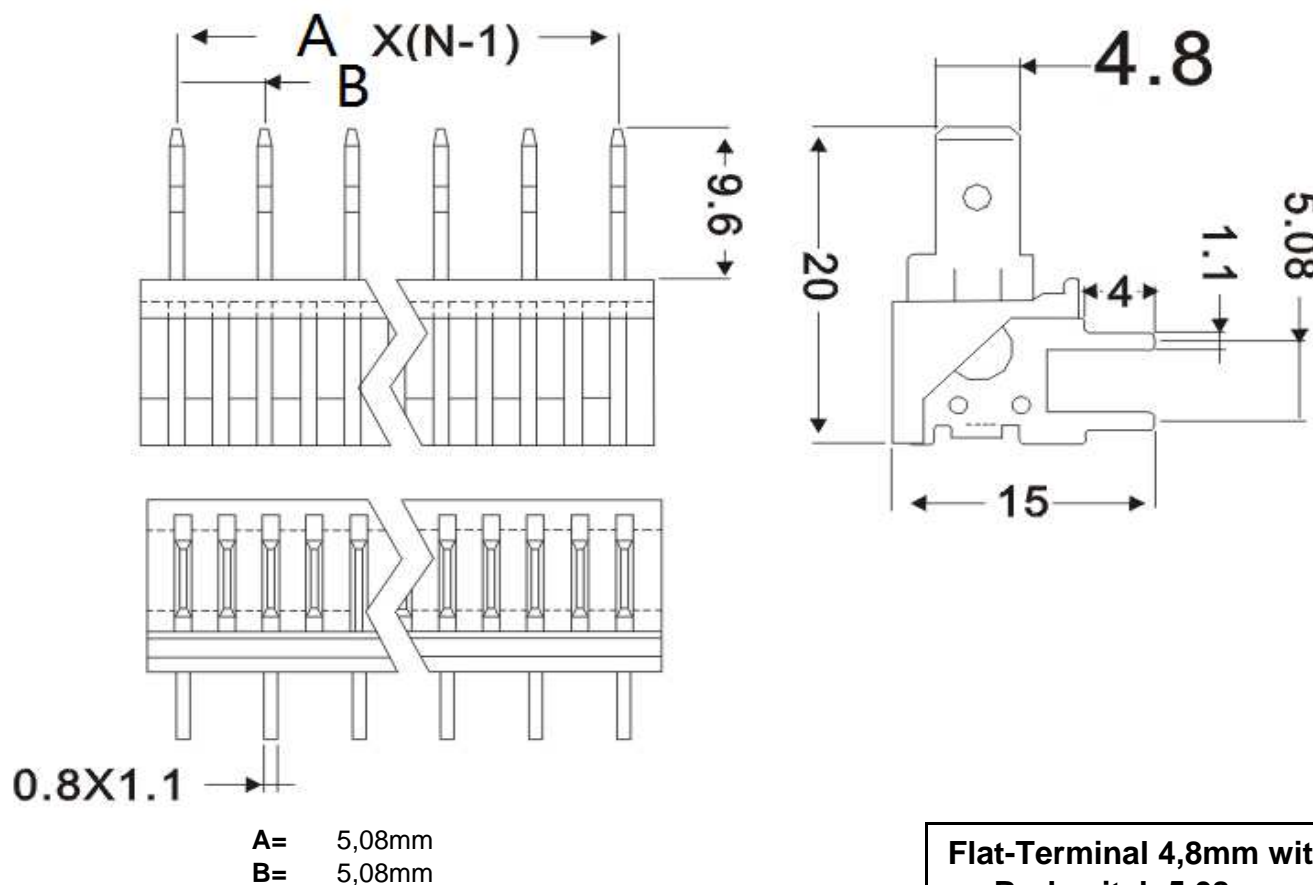

Flat-Terminal 4,8mm with Body pitch 5,08mm

Part No.: **N40052**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.08.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

Customer:

EDCON-COMPONENTS



Ordering Informations

Serie	No of Position	Body Colour	special function	ROHS	Packing					
-------	----------------	-------------	------------------	------	---------	--	--	--	--	--

N40052	02	BK	N	R	BU					
---------------	-----------	-----------	----------	----------	-----------	--	--	--	--	--

02 = 2Pos.	BK= Black Body	N= No Special function	R= ROHS Conform	BU= Bulk-Ware		
02 ~ 25Pos.			N= NON ROHS Conform			

**Flat-Terminal 4,8mm with
Body pitch 5,08mm**

Part No.: **N40052**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.08.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3

Customer:

www.edcon-components.com

email: info@edcon-components.com



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



**Flat-Terminal 4,8mm with
Body pitch 5,08mm**

Part No.: **N40052**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.08.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	Customer: