





**Technical Specification**

Shield Cover: Zn Alloy Nickel plated  
 GND Cont: COPER NICKEL plated  
 Scvrew Nut: Brass Nickel plated  
 Housing: ABS  
 Terminals: Brass Silver plated





Rating: 100VAC 1A max.  
 Contact Resistance: Pin 30m Ohm max.  
 Shell 50m Ohm max.  
 Insulation Resistance: 100M Ohm at 500VDC min.  
 Voltage Withstanding: 250VAC for 1 minute

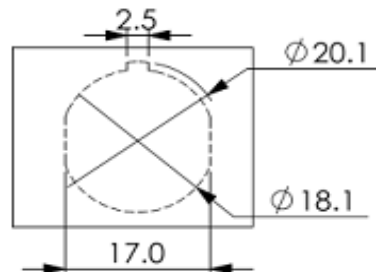

**THROUGH HOLE DIMENSIONS**



**Pos.**

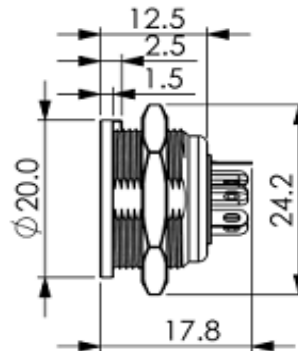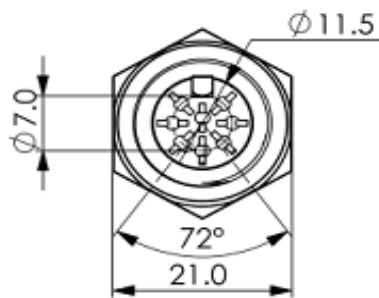

**Ordering Information**

Serie	Pos.	ROHS	Packing			
T20E044	5A	R	B			

	N= non ROHS	B= Bulk-Ware	
	R= ROHS	IN= individuell	

DIN CHASSIS MOUNT METALL COVER with Latch Type	
Part No.:	<b>T20E044</b>
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	02.08.2011
APPD:	Join			FINISH	Shieh	Sheet	1 from 1