



Technical Specification



Shield Cover:
GND Cont:
Scvrew Nut:
Housing:
Terminals:


Zn Alloy Nickel plated
COPER NICKEL plated
Brass Nickel plated
ABS
Brass Silver plated

Rating:
Contact Resistance:






100VAC 1A max.
Pin 30m Ohm max.

Insulation Resistance:
Voltage Withstanding:

Shell 50m Ohm max.
100M Ohm at 500VDC min.
250VAC for 1 minute

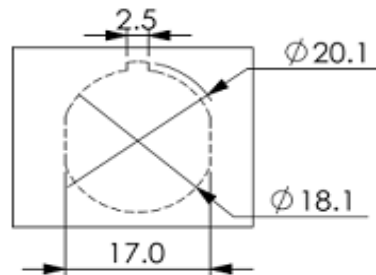

THROUGH HOLE DIMENSIONS

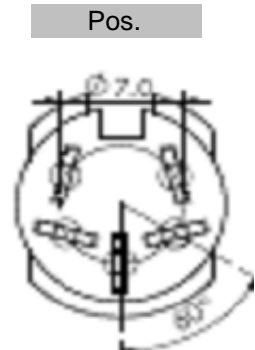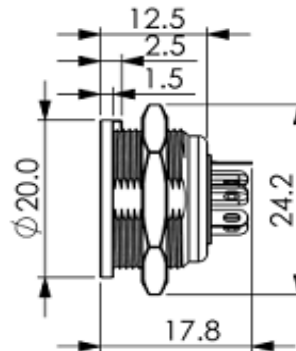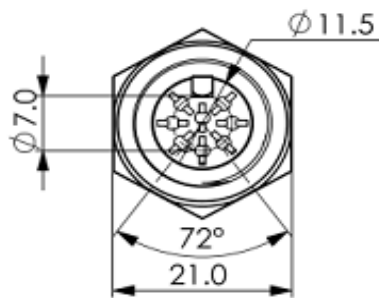

Pos.

Ordering Information

Serie	Pos.	ROHS	Packing			
T20E045	5B	R	B			

	N= non ROHS	B= Bulk-Ware	
	R= ROHS	IN= individuell	

DIN CHASSIS MOUNT METALL COVER with Latch Type	
Part No.:	T20E045
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	02.08.2011
APPD:	Join			FINISH	Shieh	Sheet	1 from 1