



Technical Specification



Shield Cover:
GND Cont:
Scvrew Nut:
Housing:
Terminals:


Zn Alloy Nickel plated
COPER NICKEL plated
Brass Nickel plated
ABS
Brass Silver plated

Rating:
Contact Resistance:






100VAC 1A max.
Pin 30m Ohm max.

Insulation Resistance:
Voltage Withstanding:

Shell 50m Ohm max.
100M Ohm at 500VDC min.
250VAC for 1 minute

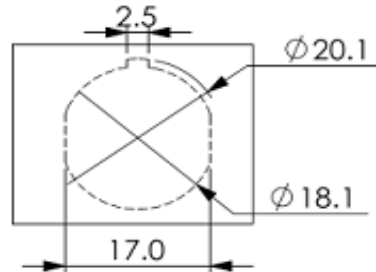

THROUGH HOLE DIMENSIONS

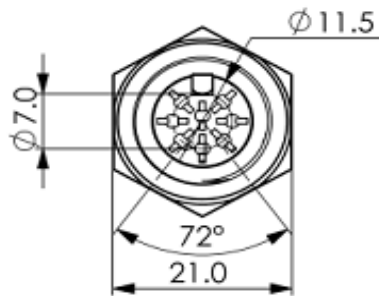

Pos.

Ordering Information

| | | | | | | |
|---------|------|------|---------|--|--|--|
| Serie | Pos. | ROHS | Packing | | | |
| T20E048 | 8A | R | B | | | |

| | | | |
|--|-------------|-----------------|--|
| | N= non ROHS | B= Bulk-Ware | |
| | R= ROHS | IN= individuell | |
| | | | |

| | |
|--|----------------|
| DIN CHASSIS MOUNT METALL COVER with Latch Type | |
| Part No.: | T20E048 |
| Customer: | |

| | | | | | | | |
|-------|-------|------|-------|--------|-------|-------|------------|
| DRW: | Jason | CHKD | Jules | MATL: | Wu | DATE | 02.08.2011 |
| APPD: | Join | | | FINISH | Shieh | Sheet | 1 from 1 |