


Technical Specification

Mounting : 5,0mm Spacing
 Material: Spring brass, tin plated
 Rated Voltage: 250V
 Rated Current: Max. 6,3A
 Unit Weight: 0,24gr.
 Packing: Bulk 1000PCS
 Thickness: 0,8mm Ni Plated

Technical Drawing

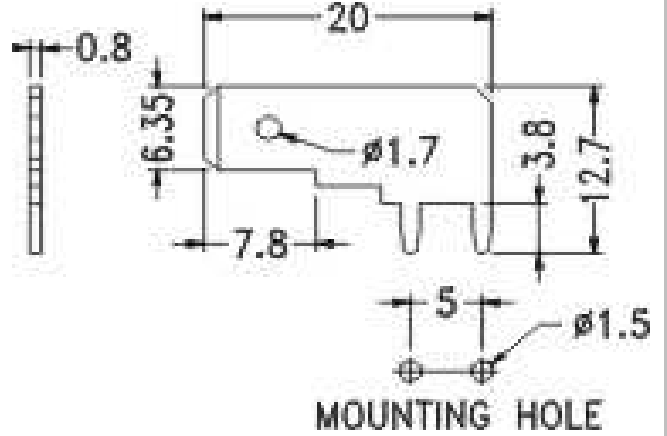

Ordering Information

| | | | | | | |
|---------------|----------|-----------|--|--|--|--|
| Serie | ROHS | Packing | | | | |
| N40008 | R | BU | | | | |

| | |
|-----------------------------|----------------------|
| R = ROHS Conform | BU = Poly Bag |
| N = NON ROHS Conform | |

| | |
|---------------------|---------------|
| TAB Terminal | |
| Part No.: | N40008 |
| Customer: | |

| | | | | | | | |
|-------|-------|------|-------|--------|-------|-------|------------|
| DRW: | Jason | CHKD | Jules | MATL: | Wu | DATE | 12.11.2013 |
| APPD: | Join | | | FINISH | Shieh | Sheet | 1 from 1 |

