EDCON COMPONENTS
A MEMBER OF EDCON-GROUP

Technical Specification

Maximum Electrical Ratings:	75℃ / 600V
Maximum Electrical Ratings:	22-16AWG/ 0,5-1,5mm² 19A
	16-14AWG/ 1,5-2,5mm² 27A
	14-12AWG/ 2,5-4,0mm² 37A
	12-10AWG/4-6mm² 48A
Terminal Body:	Copper
Insulation:	Nylon
Plating:	Tin
VIM--- Flared Nylon without copper sleeve	
PIPG-- Pre insulated funnel Nylon insulator with easy entry copper sleeve	

Technical Drawing

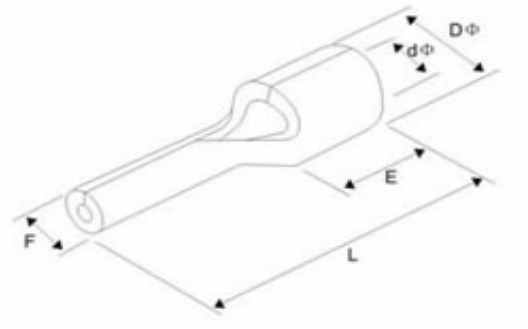

This Dimension are for 16~14AWG / 1,5~2,5mm²

Order Code		F	L	E	DØ	dØ							Color
A0		1,9	13,8	4,8	4,1	2,3							
A1		1,9	14,8	4,8	4,1	2,3							
A2		1,9	16,8	4,8	4,1	2,3							
A3		1,9	17,8	4,8	4,1	2,3							
A4		1,9	22,8	4,8	4,1	2,3							
A5													
A6													
A7													Non Insulated
A8													
A9													
B0													
B1													
B2													
B3													
B4													

Ordering Information

Serie	Order Code	ROHS	Packing			
N38061	**A0**	**R**	**BU102**			

look table	**R**= ROHS conform	**BU102** 1000PCs in one poly bag
	N= Non ROHS conform	

Needle shapeed bar end

Part No.: **N38061**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	08.09.2009
APPD:	Join			FINISH	Shieh	Sheet	1 from 1

Copyright by EDCON-COMPONENTS H.Schmitt

www.edcon-components.com
email: info@edcon-components.com