




**Technical Specification**

Maximum Electrical Ratings:	75°C / 600V
Maximum Electrical Ratings:	22-16AWG/ 0,5-1,5mm <sup>2</sup> 19A
	16-14AWG/ 1,5-2,5mm <sup>2</sup> 27A
	14-12AWG/ 2,5-4,0mm <sup>2</sup> 37A
	12-10AWG/4-6mm <sup>2</sup> 48A
Terminal Body:	Copper
Insulation:	Nylon
Plating:	Tin
VIM--- Flared Nylon without copper sleeve	
PIPG-- Pre insulated funnel Nylon insulator with easy entry copper sleeve	

**Technical Drawing**

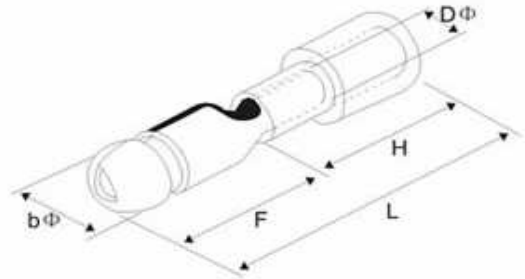

This Dimension are for 16~14AWG / 1,5/2,5mm<sup>2</sup>

Order Code	dØ	F	DØ	H	L									Color
A0	4,0	11,0	2,3	10,0	21,0									Blue
A1	5,0	11,0	2,3	10,0	21,0									
A2														
A3														
A4														
A5														
A6														
A7														
A8														
A9														
B0														
B1														
B2														
B3														
B4														

**Ordering Information**

Serie	Order Code	ROHS	Packing			
N38067	A0	R	BU102			

look table	R= ROHS conform	BU102 1000PCs in one poly bag
	N= Non ROHS conform	

<b>Bullet shaped insulated pre-public joint</b>	
Part No.:	<b>N38067</b>
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	08.09.2009
APPD:	Join			FINISH	Shieh	Sheet	1 from 1