




**Technical Specification**

Maximum Electrical Ratings:	
Maximum Electrical Ratings:	
Terminal Body:	Brass
Insulation:	
Plating:	Tin

**Technical Drawing**

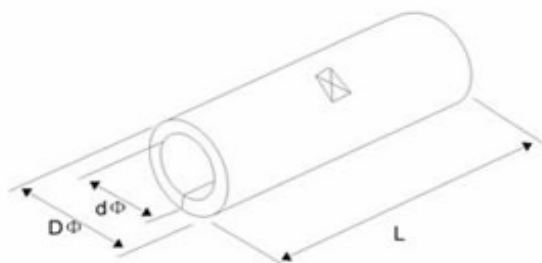

Order Code	AWG	mm <sup>2</sup>	Dø	dø	L
A0	22~16	0,5~1,5	3,3	1,7	15,0
A1	16~14	1,5~2,5	4,0	2,3	15,0
A2	14~12	2,5~4	5,0	3,0	15,0
A3	12~10	4~6	5,5	3,4	15,0
A4	#8	10	7,1	4,5	21,0
A5	#6	16	9,0	5,8	26,0
A6	#4	25	11,4	7,7	29,0
A7	#2	35	13,3	9,4	32,0
A8	1/0	50	15,4	11,4	36,0
A9	2/0	70	17,5	13,3	37,0
B0	3/0	95	19,4	14,5	38,0
B1	4/0	120	22,0	16,4	38,0
B2	250-300mcm	150	26,5	19,5	54,0
B3	300-350mcm	185	28,5	21,0	57,0
B4	400mcm	240	32,5	24,0	63,0
B5	500-600mcm	300	37,0	28,0	72,0

**Ordering Information**

Serie	Order Code	ROHS	Packing
N38099	A0	R	BU102

look table	R= ROHS conform	BU102 1000PCs in one poly bag
	N= Non ROHS conform	

**Female joint fully insulated terminal**

Part No.: **N38099**  
 Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	08.09.2009
APPD:	Join			FINISH	Shieh	Sheet	1 from 1