




Technical Specification

Maximum Electrical Ratings:	75°C / 600V
Maximum Electrical Ratings:	22-16AWG/ 0,5-1,5mm ² 19A
	16-14AWG/ 1,5-2,5mm ² 27A
	14-12AWG/ 2,5-4,0mm ² 37A
	12-10AWG/4-6mm ² 48A
Terminal Body:	Copper
Insulation:	Nylon
Plating:	Tin
VIM--- Flared Nylon without copper sleeve	
PIPG-- Pre insulated funnel Nylon insulator with easy entry copper sleeve	

Technical Drawing

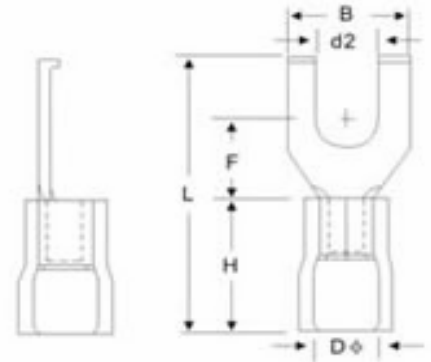

This Dimension are for 16~14AWG / 1,5~2,5mm²

Order Code	Tab (mm)	d2	B	L	F	H	Dø									Color
A0	#6	3,7	7,5	19,0	5,20	10,0	4,9									Blue
A1	#8	4,3	7,5	19,0	5,20	10,0	4,9									
A2	#10	5,3	7,5	19,0	5,20	10,0	4,9									
A3																
A4																
A5																
A6																
A7																
A8																
A9																
B0																
B1																
B2																
B3																
B4																

Ordering Information

Serie	Order Code	ROHS	Packing			
N38115	A0	R	BU102			

look table	R= ROHS conform	BU102 1000PCs in one poly bag
	N= Non ROHS conform	

Hook end Insulated terminal	
Part No.:	N38115
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	08.09.2009
APPD:	Join			FINISH	Shieh	Sheet	1 from 1