




**Technical Specification**

Maximum Electrical Ratings:	75°C / 600V
Maximum Electrical Ratings:	22-16AWG/ 0,5-1,5mm <sup>2</sup> 19A
	16-14AWG/ 1,5-2,5mm <sup>2</sup> 27A
	12-10AWG/4-6mm <sup>2</sup> 48A
Terminal Body:	Copper
Insulation:	
Plating:	Tin

**Technical Drawing**

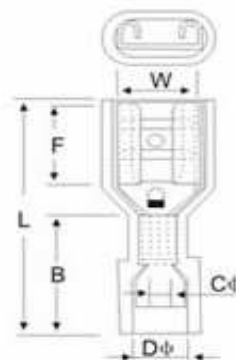

This Dimension are for 12~10AWG / 4~6mm<sup>2</sup>

Order Code	Tab (mm)	W	F	L	B	DØ	CØ	T						Color
A0	0,8x6,35	6,6	7,3	24,0	13,0	6,3	3,4	0,4						
A1														
A2														
A3														
A4														
A5														
A6														
A7														
A8														
A9														
B0														
B1														
B2														
B3														
B4														

**Yellow Insulator**

**Ordering Information**

Serie	Order Code	ROHS	Packing			
<b>N38140</b>	<b>A0</b>	<b>R</b>	<b>BU102</b>			

look table	R= ROHS conform	<b>BU102</b> 1000PCs in one poly bag
	N= Non ROHS conform	

<b>Public female fully isolated terminal</b>	
Part No.:	<b>N38140</b>
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	08.09.2009
APPD:	Join			FINISH	Shieh	Sheet	1 from 1