




Technical Specification

| | |
|-----------------------------|--------------------------|
| Maximum Electrical Ratings: | 75°C / 600V |
| Maximum Electrical Ratings: | 22-16AWG/ 0,5-1,5mm² 19A |
| | 16-14AWG/ 1,5-2,5mm² 27A |
| | 12-10AWG/4-6mm² 48A |
| Terminal Body: | Copper |
| Insulation: | |
| Plating: | Tin |
| | |
| | |

Technical Drawing

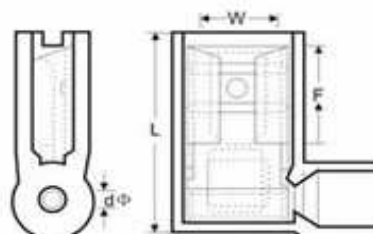

This Dimension are for 22~16AWG / 0,5~1,5mm²

| Order Code | Tab (mm) | W | F | L | dØ | | | | | | | | | | | | Color | |
|------------|----------|-----|-----|------|-----|--|--|--|--|--|--|--|--|--|--|--|-------|---------------|
| A0 | 0,8x4,75 | 5,0 | 7,0 | 15,0 | 1,7 | | | | | | | | | | | | | Red Insulator |
| A1 | 0,8x6,35 | 6,6 | 7,6 | 16,0 | 1,7 | | | | | | | | | | | | | |
| A2 | | | | | | | | | | | | | | | | | | |
| A3 | | | | | | | | | | | | | | | | | | |
| A4 | | | | | | | | | | | | | | | | | | |
| A5 | | | | | | | | | | | | | | | | | | |
| A6 | | | | | | | | | | | | | | | | | | |
| A7 | | | | | | | | | | | | | | | | | | |
| A8 | | | | | | | | | | | | | | | | | | |
| A9 | | | | | | | | | | | | | | | | | | |
| B0 | | | | | | | | | | | | | | | | | | |
| B1 | | | | | | | | | | | | | | | | | | |
| B2 | | | | | | | | | | | | | | | | | | |
| B3 | | | | | | | | | | | | | | | | | | |
| B4 | | | | | | | | | | | | | | | | | | |

Ordering Information

| Serie | Order Code | ROHS | Packing | | | |
|---------------|------------|----------|--------------|--|--|--|
| N38144 | A0 | R | BU102 | | | |

| | | |
|------------|---------------------|---|
| look table | R= ROHS conform | BU102 1000PCs in one poly bag |
| | N= Non ROHS conform | |

| | |
|--|---------------|
| Flag Shaped fully isolated terminal | |
| Part No.: | N38144 |
| Customer: | |

| | | | | | | | |
|-------|-------|------|-------|--------|-------|-------|------------|
| DRW: | Jason | CHKD | Jules | MATL: | Wu | DATE | 08.09.2009 |
| APPD: | Join | | | FINISH | Shieh | Sheet | 1 from 1 |