




**Technical Specification**

Maximum Electrical Ratings:	105°C / 300V
Maximum Electrical Ratings:	
Terminal Body:	Copper
Insulation:	
Plating:	Tin

**Technical Drawing**

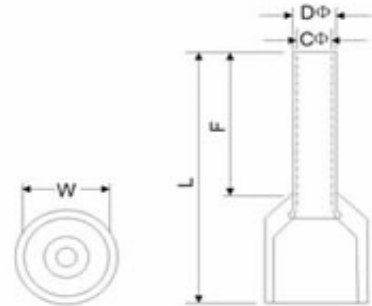

Order Code	mm <sup>2</sup>	F	L	W	B	DØ	CØ	Color
A0	2x0,5	8,00	14,5	5,0	6,5	1,8	1,5	White
A1	2x0,75	8,00	14,7	5,5	6,7	2,1	1,8	Blue
A2	2x0,75	10,0	16,7	5,5	6,7	2,1	1,8	Blue
A3	2x1,0	8,0	15,1	5,5	7,1	2,3	2,0	Red
A4	2x1,0	10,0	17,1	5,5	7,1	2,3	2,0	Red
A5	2x1,5	8,0	15,5	6,4	7,2	2,6	2,3	Black
A6	2x1,5	12,0	19,5	6,4	7,5	2,6	2,3	Black
A7	2x2,5	10,0	18,5	8,0	8,5	3,3	2,9	Gray
A8	2x2,5	13,0	21,5	8,0	8,5	3,3	2,9	Gray
A9	2x4,0	12,0	23,1	8,8	11,1	4,2	3,8	Orange
B0	2x6,0	14,0	26,1	9,5	12,1	5,3	4,9	Green
B1	2x10	14,0	26,6	12,6	12,0	6,9	6,5	Brown
B2	2x16	14,0	31,3	19,0	17,3	8,7	8,3	White
B3								
B4								

**Ordering Information**

Serie	Order Code	ROHS	Packing			
<b>N38186</b>	<b>A0</b>	<b>R</b>	<b>BU102</b>			

look table	R= ROHS conform	BU102 1000PCs in one poly bag
	N= Non ROHS conform	

**Two pre insulated cord end terminals**

Part No.: **N38186**  
 Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	08.09.2009
APPD:	Join			FINISH	Shieh	Sheet	1 from 1