




Technical Specification

Maximum Electrical Ratings:	105°C / 300V
Maximum Electrical Ratings:	
Terminal Body:	Copper
Insulation:	
Plating:	Tin

Technical Drawing

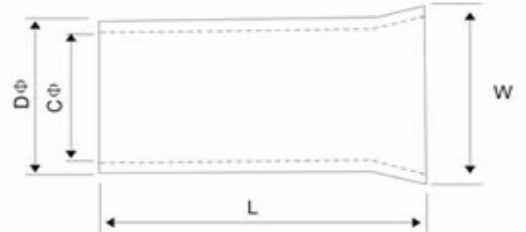

Order Code	mm ²	L	DØ	CØ	W	AWG								
A0	0,5	6,00	1,3	1,0	1,7	#22								
A1	0,5	8,00												
A2	0,5	10,0												
A3	0,5	12,0												
A4	0,75	6,00	1,5	1,2	1,9	#20								
A5	0,75	8,00												
A6	0,75	10,0												
A7	0,75	12,0												
A8	1,0	6,00	1,7	1,4	2,2	#18								
A9	1,0	8,00												
B0	1,0	10,0												
B1	1,0	12,0												
B2	1,5	6,00	2,0	1,7	2,5	#16								
B3	1,5	8,00												
B4	1,5	10,0												
B5	1,5	12,0												
B6	1,5	18,0												
B7	2,5	6,00					2,6	2,2	3,3	#14				
B8	2,5	8,00												
B9	2,5	10,0												
C0	2,5	12,0												
C1	2,5	18,0	3,2	2,8	3,9	#12								
C2	4,0	9,0												
C3	4,0	12,0												
C4	4,0	18,0												
C5	6,0	10,0	3,9	3,5	4,8	#10								
C6	6,0	12,0												
C7	6,0	15,0												
C8	6,0	18,0												

NON insulated cord end terminals

Part No.: **N38187**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	08.09.2009
APPD:	Join			FINISH	Shieh	Sheet	1 from 2



Order Code	mm ²	L	DØ	CØ	W	AWG				
C9	10	12,00	4,80	4,50	5,80	#7				
D0	10	15,00								
D1	10	18,00								
D2	16	12,0	6,2	5,8	7,2	#8				
D3	16	15,0								
D4	16	18,0								
D5	25	16,0	7,9	7,5	9,1	#4				
D6	25	22,0								
D7	35	16,0	8,7	8,3	10,2	#2				
D8	35	12,0								
D9	35	18,0								
E0	35	25,0								
E1	50	20,0	10,9	10,3	12,4	#1				
E2	50	22,0								
E3	50	25,0								
E4	50	30,0								

Ordering Information

Serie	Order Code	ROHS	Packing			
N38187	A0	R	BU102			

look table	R= ROHS conform	BU102 1000PCs in one poly bag
	N= Non ROHS conform	

NON insulated cord end terminals

Part No.: **N38187**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	08.09.2009
APPD:	Join			FINISH	Shieh	Sheet	2 from 2