

EDCON-COMPONENTS




Technical Discription

Housing Material:	ABS
Center Pin:	Nickel plating
Terminal Material:	Brass or Copper alloy
Withstanding Voltage:	AC500V 60Hz for 1 Minute
Insulation Resistance:	100MΩ min at 500VDC
Contact Resistance:	30mΩ max.
Insertion force:	0,3~ 3,0kgs
Extraction force:	0,2~ 3,0kgs
Life Test:	5000 cycles unloading
Temperature Range:	.-20°C to +70°C
Power Rating:	0,5A / 12VDC
Dimension:	
Inside Diameter:	A= 2,1mm
Outside Diameter:	B= 5,5mm
Length of Contact:	C= 10,5mm
Total length:	D= 32,9mm
Wire Diameter:	E= 4mm

Features

DC Power Jack can be intnded by portable TV, DCD, Scanner, Printer, mobile Phone, Battery Charger, Blue tooth elements, Network switch and so on.

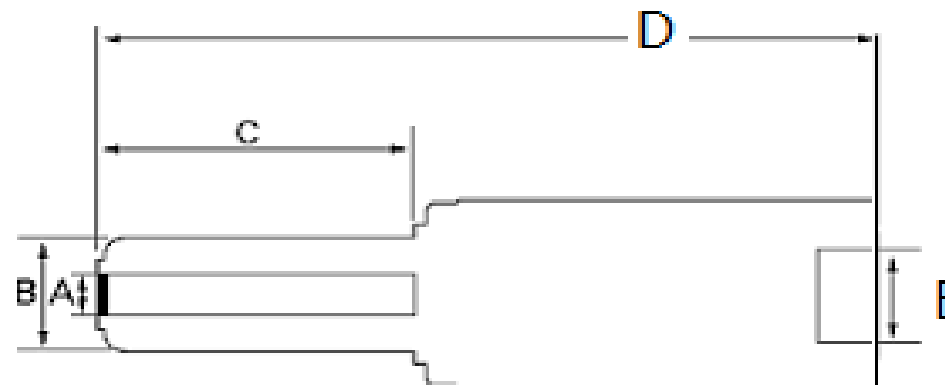

DC-Power Plug

Part No.:

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	04.01.2023
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

EDCON-COMPONENTS



Ordering Informations

Terminal

Serie	Cover	Plating	ROHS	Packing		
T19C023	A	N0	R	BU		

A = Plastic w/o. cable Protect.	N0 = Nickel	R = ROHS Conform	BU = Bulk-Ware
P = Plastic w. cable Protect.	G0 = Gold	N = NON ROHS Conform	
B = Bakelite			

DC-Power Plug	
Part No.:	T19C023
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	04.01.2023
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2	